



GENERAL CATALOG

2021 | 2022

CENTRIFUGES
INCUBATORS





DEAR PARTNER,

For more than 115 years, Hettich has been at your side when it comes to centrifugation and incubation of vital samples. In support of the highly competent medical and research personnel working daily in the laboratory, our products quietly help to make processes more efficient and provide reliable results. These qualities are more important today than ever before – in both the fight against global pandemics and the development of new vaccines and treatments. We take on this responsibility with a wide portfolio of centrifuges and incubators that comply with all current and future regulatory standards and certifications so that you can concentrate on your work.

In addition to ensuring high quality products, forward-looking new developments are also important. In this issue of our General Catalogue we present our innovative dual centrifuge, ZentriMix 380 R as well as the updated HettInfo II documentation system for our blood transfusion-focused centrifuges, the ROTO SILENTA 630 RS and ROTIXA 500 RS.

You will find these and other new products in the following pages. As always, our products are backed by our 24 month Global Warranty and 10 year spare parts support guarantee.

We thank you for your interest in Hettich and hope to continue our role as a trusted partner in your laboratory.

Klaus-Günter Eberle
CEO

OVER
115
YEARS
TRADITION
& QUALITY

GOOD IDEAS FOR EVEN MORE EFFICIENCY: NEW PRODUCTS FROM HETTICH IN 2021.

INNOVATION IN CENTRIFUGATION – THE DUAL CENTRIFUGE ZENTRIMIX 380 R

Homogenizing, mixing and milling – fast and efficient:

The ZentriMix 380 R dual centrifuge allows many demanding laboratory tasks in research, development and analysis to be carried out efficiently. Examples include the rapid mixing of viscous materials, production of nanoparticles in closed (sterile) vessels and tissue disruption. A particular advantage is the powerful cooling system for preparation of temperature-sensitive samples. The ZentriMix 380 R is equipped with large rotating plates for sample vessels. Adapters for containers with a range of 2 - 50 ml are available. This allows up to 40 tubes to be centrifuged at the same time.

Approved technology: The ZentriMix 380 R was developed on the basis of proven Hettich centrifuge technology. This makes the unit safe, durable and reliable. In addition, the ZentriMix 380 R can also be used as a classic centrifuge with a standard rotor.

Recognized innovation: Hettich has already received several awards as an innovative company for the development of the versatile dual centrifuge ZentriMix 380 R and new applications in the fields of pharmaceuticals, food control and biomedical research.



— page 168

Further information can be found
on page 168.





MORE TRANSPARENCY IN THE CENTRIFUGATION OF BLOOD SAMPLES

Ensuring quality is the top priority for blood donations. To achieve this, data obtained during the various manufacturing processes must be fully traceable and documented. With the new HettInfo II documentation system, all important steps before and during centrifugation can be documented. The touch display guides the user step by step through the process, from scanning the blood bags to centrifugation. Please go to page 160 to learn how to make your processes more transparent and traceable.

— page 160

THE WORLD MARKET LEADER IN AUTOMATION

For over 25 years, Hettich has remained the pioneer and undisputed world market leader in the field of automated centrifugation. The difference is the proven and durable Hettich technology that masters every requirement and every level of automation. With three model sizes and a wide range of accessories, Hettich offers solutions for a variety of automated applications. More on page 174.

ENVIRONMENTAL SIMULATION PRODUCTS FROM HETTICH

In addition to the well-known portfolio of centrifuges and incubators, Hettich also offers a variety of solutions in the field of environmental simulation. The portfolio includes climatic and stability test cabinets as well as plant growth cabinets in various equipment variants and sizes. More information can be found on page 196.



— page 174



— page 196

CONTACT

— RESPONSIBILITY FOR YEARS

To get help selecting the perfect choice of equipment, sales support or any general inquiry, please contact our Global Customer Service Team.

Select your direct contact person by area or search our contact directory on www.hettichlab.com/contact



— YOUR CONTACT OPTIONS BY AREA

EUROPE, UK,
BLAKANS

✉ sales1@hettichlab.com ☎ + 49 7461 705 1402

RUSSIA, UKRAINE,
BELARUS, POLAND

✉ sales1@hettichlab.com ☎ + 49 7461 705 1402

AFRICA

✉ sales2@hettichlab.com ☎ + 49 7461 705 1403

MIDDLE EAST

✉ sales2@hettichlab.com ☎ + 49 7461 705 1403

INDIA, PAKISTAN

✉ sales3@hettichlab.com ☎ + 49 7461 705 1404

ASIA-PACIFIC

✉ sales3@hettichlab.com ☎ + 49 7461 705 1404

NORTH- / SOUTH
AMERICA

✉ sales3@hettichlab.com ☎ + 49 7461 705 1404

SERVICE

— 5 GOOD REASONS TO CHOOSE HETTICH SERVICE

- 1** Short response time thanks to our 48-hour response promise.*
- 2** Our technical specialists are always available for one-to-one communication. No more waiting on a hotline or in a call-center.
- 3** Localized consulting and qualification.
- 4** Preventive maintenance contracts available.*
- 5** Parts and service are available for 10 years, even after a specific model has been discontinued.

Our global network of Hettich subsidiaries and authorized service providers ensure that customer challenges are addressed quickly and efficiently with real-time solutions.

In addition to our German headquarters we have branch offices in throughout Europe as well as the USA (North America) and Singapore (ASEAN) to offer fast, local support. You can find an overview of an authorized service provider for your country on our Website: www.hettichlab.com/contact

You can reach us through the following email address:



service@hettichlab.com

*) Not available in all countries.



								
MANUAL CENTRIFUGE	EBA 200 200 S	EBA 270	EBA 280 280 S	HAEMATOKRIT 200				
								
MIKRO 185	MIKRO 200	MIKRO 200 R	MIKRO 220	MIKRO 220 R				
								
ROTOFIX 32 A	UNIVERSAL 320	UNIVERSAL 320 R	ROTINA 380	ROTINA 380 R	ROTINA 420	ROTINA 420 R	ROTANTA 460	
								
ROTANTA 460 RC	ROTANTA 460 RF	ROTIXA 500 RS	ROTO SILENTA 630 RS					
								
ROTO LAVIT II								
								
ZENTRIMIX 380 R								
								
MIKRO 220 ROBOTIC	ROTINA 380 380 R 380 RC ROBOTIC	ROTANTA 460 ROBOTIC						
								
CYTO SYSTEMS	ROLLING CABINET	BLOOD BANK ACCESSORIES						
								
HETTCUBE 200	HETTCUBE 200 R	HETTCUBE 400	HETTCUBE 400 R	HETTCUBE 600	HETTCUBE 600 R			
								
PLANT GROWTH CABINETS	STABILITY TEST CABINETS	STABILITY TEST CABINETS						

CONTENTS

SMALL CENTRIFUGES

ON PAGE 8

MICROLITER CENTRIFUGES

ON PAGE 30



ROTANTA 460 R



ROTOFIX 46 | 46 H

BENCHTOP CENTRIFUGES

ON PAGE 50

FLOORSTANDING CENTRIFUGES

ON PAGE 134

WASH CENTRIFUGE

ON PAGE 162

DUAL CENTRIFUGE

ON PAGE 168

AUTOMATED CENTRIFUGES

ON PAGE 174

EQUIPMENT

ON PAGE 176

INCUBATORS

ON PAGE 184

ENVIRONMENTAL CABINETS

ON PAGE 196

CONTROL PANELS | CAPACITIES | FEATURES | MODEL VARIANTS
CERTIFICATES / REGISTRATIONS | CATALOG EXPLANATION

SMALL CENTRIFUGES

Benchtop performance in a compact footprint



MANUAL CENTRIFUGE
on page 10



EBA 200 | 200 S
on page 12



EBA 270
on page 16

01



EBA 280 | 280 S
on page 20



HAEMATOKRIT 200
on page 28

MANUAL CENTRIFUGE

Operate independently anywhere

The adaptable manual centrifuge can be simply clamped to any benchtop, with no need for electricity. Its self-lubricating drive system makes it virtually maintenance-free.

— FEATURES

- Max. RPM: 3,000 min⁻¹
- Max. RCF: 1,298
- Max. capacity: 4 x 15 ml
- Maintenance-free due to its self-lubricating drive system
- Clamping device for simple table mounting
- Choice of 2 rotors

— FIELDS OF APPLICATION

- Veterinary
- Field Testing
- Aid Organizations
- Pharmacies



TECHNICAL DATA

	MANUAL CENTRIFUGE without rotor	Swing-out rotor, 4-place	Swing-out rotor, 4-place
angle	-	90°	50°
max. capacity	-	4 x 15 ml (conical only)	4 x 15 ml
max. RPM	-	3,000 min ⁻¹	3,000 min ⁻¹
max. RCF	-	1,298	1,077
dimensions (WxDxH)	140 x 175 x 285 mm	-	-
weight	approx. 0.9 kg	-	-
Cat. No.	1011	1014	1025



EBA 200 | 200 S

Top performance for small laboratories

The EBA 200 and EBA 200 S are practical, compact centrifuges for small sample sizes. The high speed S model can deliver reliable results in 3 minutes or less. An 8-place fixed angle rotor is included to hold standard blood and urine tubes up to 15 ml in capacity.

— FEATURES

- Max. RPM: 200 - 6,000 min⁻¹ | 8,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 3,461 | 6,153
- Max. capacity: 8 x 15 ml
- Small centrifuge including 8-place angle rotor
- Compact design
- IVD-conform according to directive 98/79/EC
- Maximum noise level of ≤ 50 dB(A) (EBA 200)
- Impulse key for short cycle mode
- 2 individual acceleration and deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Physician's Office Laboratory (POL)
- Small laboratories
- Veterinary laboratories
- Off-site draw locations



Centrifuge packages for the model can be found on [page 15](#)



More information about the control panel can be found on [page 198](#)




TECHNICAL DATA

	EBA 200	EBA 200 S
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~
frequency	50 – 60 Hz	50 – 60 Hz
consumption	100 VA	160 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	8 x 15 ml	8 x 15 ml
max. RPM	6,000 min ⁻¹	8,000 min ⁻¹
max. RCF	3,461	6,153
running time	1 – 99 min, ∞ continuous run, short cycle mode (impulse button)	1 – 99 min, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	261 x 353 x 228 mm	261 x 353 x 228 mm
weight	approx. 9 kg	approx. 11 kg
max. noise level	≤ 50 dB (A)	≤ 55 dB (A)
Cat. No.	1800	1802
100 – 127 V 1 ~ / 50–60 Hz	1800-01	1802-01
emission, immunity	FCC class B	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS


ANGLE ROTORS	angle	max. RPM	max. capacity	Cat. No	page
 angle rotor, 8-place	33°	6,000 min ⁻¹ 8,000 min ⁻¹	8 x 15 ml	INCLUSIVE	14

ANGLE ROTOR, 8-PLACE



Rotor

max. RPM	EBA 200 200 S	6,000 min ⁻¹ 8,000 min ⁻¹
max. RCF		3,461 6,153
max. capacity		8 x 15 ml
run up / run down, braked in sec		17 / 12 37 / 17
angle		33°
Cat. No.	INCLUSIVE	



Vessels

capacity in ml	0.5	1.5	2	4	5	6	15	1.1-1.4	2.6-3.4	2.7-3	4.5-5	4.9	7.5-8.5	9-10	5
Ø x L in mm	10.7 x 36	11 x 38	11 x 38	10 x 88	12 x 75	12 x 82	17 x 100	8 x 66	13 x 65	11 x 66	11 x 92	13 x 90	15 x 92	16 x 92	17 x 59
max. RCF ²⁾	EBA 200	2,214	2,173	2,173	2,817	2,697	3,461	2,697	2,697	2,697	3,461	3,461	3,461	3,461	2,576
max. RCF ²⁾	EBA 200 S	3,935	3,864	3,864	5,009	4,794	6,153	4,794	4,794	4,794	6,153	6,153	6,153	6,153	4,579
radius in mm	55	54	54	70	67	67	86	67	67	67	86	86	86	86	64
Cat. No.	Pediatric	microliter tubes			tubes²⁾			blood collection / urine tubes							-



Adapter

boring Ø x L in mm	11 x 35	11 x 35	11 x 35	11.5 x 67.5	13.5 x 60	13.5 x 60	17.7 x 88	13.5 x 60	13.5 x 60	13.5 x 60	17.7 x 88	17.7 x 88	17.7 x 88	17.7 x 88	17 x 25
vessels per rotor	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8
Cat. No.	1063-8 (8 pcs.)			6305	1054-A	1054-A	-	1054-A	1054-A	1054-A	-	-	-	-	1064

Vessels

capacity in ml	15	10	1.6-5	4-7	8	8.5-10	12
Ø x L in mm	17 x 120	15 x 102	13 x 75	13 x 100	16 x 125	16 x 100	17 x 102
max. RCF ²⁾	EBA 200	3,461	3,461	2,697	3,461	3,461	3,461
max. RCF ²⁾	EBA 200 S	6,153	6,153	4,794	6,153	6,153	6,153
radius in mm	86	86	86	86	86	86	86
Cat. No.	-	blood collection / urine tubes					



Adapter

boring Ø x L in mm	17.7 x 88	17.7 x 88	13.5 x 60	13.5 x 79	17.7 x 88	17.7 x 88	17.7 x 88
vessels per rotor	4	8	8	8	4	8	4
Cat. No.	-	-	1054-A	1058	-	-	-

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

12) For the EBA 200 only! Model EBA 200 S is supplied as standard with an adapter for these tubes.

PACKAGES

EBA 200 S BLOOD TUBE PACKAGE 1

<u>EBA 200 S BLOOD TUBE PACKAGE 1</u>	number of vessels	volume (ml)	size (mm)	RPM	RCF	
- 1 x EBA 200 S centrifuge	1802	8	1.6 - 5	13 x 75	8,000	4,794
incl. anlge rotor, 8-place		8	4 - 7	13 x 100	8,000	6,153
- 8 x adapter, 1-place	1054-A	8	8.5 - 10	16 x 100	8,000	6,153
- 8 x adapter, 1-place	1058	8	8	16 x 125	8,000	6,153

1802SET1

EBA 200 BLOOD TUBE PACKAGE 2

EBA 200 BLOOD TUBE PACKAGE 2	number of vessels	volume (ml)	size (mm)	RPM	RCF	
- 1 x EBA 200 centrifuge incl. angle rotor	1800	8	1.6 - 5	13 x 75	6,000	2,697
- 8 x adapter, 1-place	1059	8	4 - 7	13 x 100	6,000	3,461
- 8 x adapter, 1-place	1058	8	8.5 - 10	16 x 100	6,000	3,461
	4	8	16 x 125	6,000	3,461	

1800SET2



PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



EBA 270

Superior separation results in medical applications

The EBA 270 is a small centrifuge with a built-in swing-out rotor that has been developed specifically for use in clinical settings. It can centrifuge blood tubes and urine tubes up to 15 ml in volume at a maximum speed of 4,000 RPM / 2,254 RCF. Its 90° rotor is ideally suited for spinning blood tubes containing a separating gel.

— FEATURES

- Max. RPM: 500 - 4,000 min⁻¹ – adjustable in increments of 100
- Max. RCF: 2,254
- Max. capacity: 6 x 15 ml
- Small centrifuge including 6-place swing-out rotor
- Compact design
- IVD-conform according to directive 98/79/EC
- Maximum noise level of ≤ 51 dB(A)
- Impulse key for short cycle mode
- 2 individual deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Small laboratories
- Physician's Office Laboratory (POL)



Centrifuge packages for the model can be found on [page 19](#)



More information about the control panel can be found on [page 198](#)



TECHNICAL DATA

EBA 270	
voltage *)	200 – 240 V 1 ~
frequency	50 – 60 Hz
consumption	130 VA
emission, immunity	EN/IEC 61326-1, class B
max. capacity	6 x 15 ml
max. RPM	4,000 min ⁻¹
max. RCF	2,254
running time	1 – 99 min, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	326 x 389 x 239 mm
weight	approx. 14 kg
max. noise level	≤ 51 dB (A)
Cat. No.	2300
100 – 127 V 1 ~ / 50–60 Hz	2300-01
consumption	125 VA
emission, immunity	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS


SWING-OUT ROTORS		angle	max. RPM	max. capacity	Cat. No	page
	swing-out rotor, 6-place	90°	4,000 min ⁻¹	6 x 15 ml	INCLUSIVE	18

SWING-OUT ROTOR, 6-PLACE



Rotor

max. RPM max. RCF	4,000 min ¹ 2,254
max. capacity	6 x 15 ml
run up run down, braked in sec	10 22
angle max. noise level	90° 51 dB (A)
Cat. No.	INCLUSIVE



Vessels

capacity in ml	0.5	0.5	1.5	1.5	2	2	4	5	6	15	1.1 – 1.4	2.6 – 3.4	2.7 – 3	4 – 5.5	4.5 – 5
Ø x L in mm	10.7 x 36	10.7 x 36	11 x 38	11 x 38	11 x 38	11 x 38	10 x 88	12 x 75	12 x 82	17 x 100	8 x 66	13 x 65	11 x 66	15 x 75	11 x 92
max. RCF ²⁾	1,359	1,359	1,377	1,377	1,377	1,377	2,254	1,807	1,807	2,254	1,807	1,807	1,807	2,254	2,254
radius in mm	76	76	77	77	77	77	126	101	101	126	101	101	101	126	126
Cat. No.	Pediatric		microliter tubes				tubes²⁾				blood collection / urine tubes				
	+ 1063-6	+ 1063-6	+ 1063-6	+ 1063-6	+ 1063-6	+ 1063-6									



Adapter

boring Ø x L in mm	17.5 x 80	17.5 x 55	17.5 x 80	17.5 x 55	17.5 x 80	17.5 x 55	17.5 x 80	17.5 x 55	17.5 x 55	17.5 x 80	17.5 x 55	17.5 x 55	17.5 x 55	17.5 x 80	17.5 x 80
vessels per rotor	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
Cat. No.	2331-6	2333-6	2331-6	2333-6	2331-6	2333-6	2331-6	2333-6	2333-6	2331-6	2333-6	2333-6	2333-6	2331-6	2331-6

Vessels

capacity in ml	4.9	7.5 – 10	10	1.6 – 7	4-7	8.5 – 10	12
Ø x L in mm	13 x 90	15/16 x 75	15 x 102	13/16 x 75	13 x 100	16 x 100	17 x 102
max. RCF ²⁾	2,254	2,254	2,254	1,807	2,254	2,254	2,254
radius in mm	126	126	126	101	126	126	126
Cat. No.	blood collection / urine tubes						



Adapter

boring Ø x L in mm	17.5 x 80	17.5 x 80	17.5 x 80	17.5 x 55	17.5 x 80	17.5 x 80	17.5 x 80
vessels per rotor	6	6	6	6	6	6	6
Cat. No.	2331-6	2331-6	2331-6	2333-6	2331-6	2331-6	2331-6

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

EBA 270 BLOOD TUBE COMPLETE PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x EBA 270 centrifuge incl. swing-out rotor	2300	6	1.6 - 7 / 100	13 x 75	4,000	1,807
- 1 x bucket (set), 1-place	2333-6	6	4 - 10 / 100	13 x 100	4,000	2,254
- 1 x bucket (set), 1-place	2331-6	6	0.5 Pediatric	10,7 x 36	4,000	1,359
- 1 x adapter Pediatric (set), 1-place	1063-6	6	12 (Kova)	17 x 102	4,000	2,254
2300SET1						



PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



EBA 280 | 280 S

Simple rotor change for greater versatility

The EBA 280 and EBA 280 S offer exceptional user comfort and a choice of 6 rotors. The rotor can be removed and replaced easily thanks to the quick release system. The rotor locks in place and remains secure without the use of tools or extra effort. The backlit digital control panel offers the opportunity to save 9 multiple program settings.

— FEATURES

- RPM: 200 - 6,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 4,146 | 5,071
- Max. capacity: 6 x 50 ml
- Small centrifuge with rapid rotor change system
- Choice of 6 rotors
- IVD-conform according to directive 98/79/EC
- Maximum noise level of ≤ 51 dB(A) (EBA 280)
- Impulse key for short cycle mode
- 9 individual acceleration and deceleration stages
- Easy operation with keypad
- 9 programmable memory settings

— FIELDS OF APPLICATION

- Small laboratories
- Hospitals
- Blood banks
- Veterinary laboratories
- Physician's Office Laboratory (POL)



Centrifuge packages for the model can be found on [page 26](#)



More information about the control panel can be found on [page 198](#)



TECHNICAL DATA

	EBA 280	EBA 280 S
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~
frequency	50 – 60 Hz	50 – 60 Hz
consumption	185 VA	330 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	6 x 50 ml	6 x 50 ml
max. RPM	6,000 min ⁻¹	6,000 min ⁻¹
max. RCF	4,146	5,071
running time	1 – 99 min: 59 sec, y continuous run, short cycle mode (impulse button)	1 – 99 min: 59 sec, y continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	326 x 400 x 242 mm	326 x 400 x 242 mm
weight	approx. 12 kg	approx. 12 kg
noise level	≤ 47 dB (A) with rotor 1137	≤ 50 dB (A) with rotor 1137
Cat. No.	1101	1102
100 – 127 V 1 ~ / 50–60 Hz	1101-01	1102-01
emission, immunity	FCC class B	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 6-place	90°	6,000 min ⁻¹	6 x 15 ml	1146	22
	swing-out rotor, 8-place	90°	5,000 min ⁻¹	8 x 10 ml	1148	23
	swing-out rotor, 12-place	60°	5,000 min ⁻¹	12 x 5 ml	1142	23
ANGLE ROTORS						
	angle rotor, 6-place	35°	6,000 min ⁻¹	6 x 50 ml	1137	24
	angle rotor, 12-place	35°	5,000 min ⁻¹	12 x 7 ml	1133	24
	angle rotor, 12-place	35°	6,000 min ⁻¹	12 x 15 ml	1139	25

SWING-OUT ROTOR, 6-PLACE | 1146



Rotor

max. RPM	EBA 280 EBA 280 S	4,700 min ⁻¹ 6,000 min ⁻¹
max. RCF		3,112 5,071
max. capacity		6 x 15 ml
run up / run down, braked in sec		9 / 11 11 / 13
angle max. noise level		90° 49 dB (A)

Cat. No.

1146

Bucket

Cat. No.

1147-6 (6 pcs.)



Vessels

capacity in ml		0.5	1.5	2	4	5	6	15	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5-5	4.9	7.5–10	1.6–5
Ø x L in mm		10.7x36	11 x 38	11 x 38	10x88	12x75	12x82	17x100	8x66	13x65	11x66	15x75	11x92	13x90	15/16x92	13x75
max. RCF ²⁾	EBA 280	1,877	1,902	1,902	3,112	2,618	2,865	3,112	2,618	2,618	2,618	3,112	3,112	3,112	3,112	2,618
max. RCF ²⁾	EBA 280 S	3,059	3,099	3,099	5,071	4,266	4,669	5,071	4,266	4,266	4,266	5,071	5,071	5,071	5,071	4,266
radius in mm		76	77	77	126	106	116	126	106	106	106	126	126	126	126	106
Cat. No.		Pediatric	microliter tubes	tubes ²⁾				blood collection / urine tubes								

Adapter

boring Ø x L in mm	11 x 35	11 x 35	11 x 35	17.5x80	13.5x59	17.5x80	17.5x80	13.5x59	13.5x59	13.5x59	17.5x80	17.5x80	17.5x80	17.5x80	13.5x59
vessels per rotor	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
Cat. No.	1063-6 (6 pcs.)			-	1053-6	0767-6	-	1053-6 (6 pcs.)			-	-	-	-	1053-6

Vessels

capacity in ml	4–7	4–7	8.5–5	12
Ø x L in mm	16x75	13x100	16 x 100	17x102
max. RCF ²⁾	EBA 280	2,865	3,112	3,112
max. RCF ²⁾	EBA 280 S	4,669	5,071	5,071
radius in mm	116	126	126	126
Cat. No.				

blood collection/urine tubes

Adapter

boring Ø x L in mm	17.5x80	13.5x79	17.5x80	17.5x80
vessels per rotor	6	6	6	6
Cat. No.	0767-6	1058	-	-

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 8-PLACE | 1148



Rotor

max. RPM max. RCF	5,000 min ⁻¹ 2,991
max. capacity	8 x 10 ml
run up run down, braked in sec	8 10
angle max. noise level	90° 50 dB (A)
Cat. No.	1148



Vessels

capacity in ml	5	6	10	2.6-3.4	2.7-3	4-5.5	1.6-5	4-7
Ø x L in mm	12 x 75	12 x 82	17 x 70	13 x 65	11 x 66	15 x 75	13 x 75	16 x 75
max. RCF ²⁾	2,991	2,991	2,991	2,991	2,991	2,991	2,991	2,991
radius in mm	107	107	107	107	107	107	107	107
Cat. No.	tubes²⁾			blood collection / urine tubes				



Bucket

boring Ø x L in mm	13 x 53	13 x 53	17.5 x 53	13 x 53	13 x 53	17.5 x 53	13 x 53	17.5 x 53
vessels per rotor	8	8	8	8	8	8	8	8
Cat. No.	1131-A	1131-A	1132-A	1131-A	1131-A	1132-A	1131-A	1132-A

SWING-OUT ROTOR, 12-PLACE | 1142



Rotor

max. RPM max. RCF	5,000 min ⁻¹ 2,963
max. capacity	12 x 5 ml
run up run down, braked in sec	10 12
angle max. noise level	60° 49 dB (A)
Cat. No.	1142



Vessels

capacity in ml	5	2.6-3.4	2.7-3	1.6-5
Ø x L in mm	12 x 75	13 x 65	11 x 66	13 x 75
max. RCF ²⁾	2,963	2,963	2,963	2,963
radius in mm	106	106	106	106
Cat. No.	tube²⁾	blood collection / urine tubes		



Bucket

boring Ø x L in mm	13.2 x 53	13.2 x 53	13.2 x 53	13.2 x 53
vessels per rotor	12	12	12	12
Cat. No.	1127-A	1127-A	1127-A	1127-A


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 6-PLACE | 1137



Rotor

max. RPM max. RCF	6,000 min ⁻¹ 4,025
max. capacity	6 x 50 ml
run up run down, braked in sec	20 17
angle max. noise level	35° 47 dB (A)
Cat. No.	1137



Vessels

capacity in ml	7	15	25	50	9-10	10	1.6-5	4-7	15	50	30	50
Ø x L in mm	12 x 100	17 x 100	24 x 100	34 x 100	16 x 92	15 x 102	13 x 75	13 x 100	17 x 120	29 x 115	26 x 95	29 x 107
max. RCF ²⁾	3,944	3,783	3,703	4,025	3,783	3,783	2,978	3,783	3,824	3,824	3,703	3,904
radius in mm	98	94	92	100	94	94	74	94	95	95	92	97
Cat. No.	tubes²⁾				blood collection / urine tubes				tubes with screw cap			



Adapter

boring Ø x L in mm	13 x 92	17.5 x 95	26 x 88	35 x 96	17.5 x 95	17.5 x 95	17.5 x 95	17.5 x 95	17 x 98	30 x 98	26 x 88	29 x 95
vessels per rotor	18	6	6	6	6	6	6	6	6	3	6	6
Cat. No.	1632	1635	1633	-	1635	1635	1635	1635	1631	1641	1633	1634

— ANGLE ROTOR, 12-PLACE | 1133



Rotor

max. RPM max. RCF	5,000 min ⁻¹ 2,879
max. capacity	12 x 7 ml
run up run down, braked in sec	8 10
angle max. noise level	35° 51 dB (A)
Cat. No.	1133



Vessels

capacity in ml	5	6	7
Ø x L in mm	12 x 75	12 x 82	12 x 100
max. RCF ²⁾	2,879	2,879	2,879
radius in mm	103	103	103
Cat. No.	tubes²⁾		




Adapter

boring Ø x L in mm	12.5 x 66	12.5 x 66	12.5 x 66
vessels per rotor	12	12	12
Cat. No.	-	-	-

What makes the 1133 rotor special is its adapters with a decanting aid. The decanting aid firmly holds the tube and keeps it from falling out when the supernatant is decanted. The 1133 rotor is often used in blood typing serology.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 12-PLACE | 1139



Rotor

max. RPM max. RCF	6,000 min ⁻¹ 4,146
max. capacity	12 x 15 ml
run up run down, braked in sec	16 16
angle max. noise level	35° 50 dB (A)
Cat. No.	1139



Vessels

capacity in ml	0.5	1.5	2	5	6	15	1.1–1.4	2.6–3.4	2.7–3	4.5–5	4.9	7.5–10	10	1.6–5	4–7
Ø x L in mm	10.7 x 36	11 x 38	11 x 38	12 x 75	12 x 82	17 x 100	8 x 66	13 x 65	11 x 66	11 x 92	13 x 90	15/16 x 92	15 x 102	13 x 75	13 x 100
max. RCF ²⁾	2,777	2,737	2,737	3,300	3,300	4,146	3,300	3,300	3,300	4,146	4,146	4,146	4,146	3,300	4,146
radius in mm	69	68	68	82	82	103	82	82	82	103	103	103	103	82	103
Cat. No.	Pediatric	microliter tubes		tubes²⁾			blood collection / urine tubes								



Adapter

boring Ø x L in mm	11 x 35	11 x 35	11 x 35	13.5 x 60	13.5 x 60	17.7 x 88	13.5 x 60	13.5 x 60	13.5 x 60	17.7 x 88	17.7 x 88	17.7 x 88	17.7 x 88	13.5 x 60	13.5 x 79
vessels per rotor	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
Cat. No.	1063-6 (6 pcs.)			1054-A		-	1054-A			-	-	-	-	1054-A	1058

Vessels

capacity in ml	8	8.5–10	12	5	15
Ø x L in mm	16 x 125	16 x 100	17 x 102	17 x 59	17 x 120
max. RCF ²⁾	4,146	4,146	4,146	3,180	4,146
radius in mm	103	103	103	79	103
Cat. No.	blood collection / urine tubes			-	-



Adapter

boring Ø x L in mm	17.7 x 88	17.7 x 88	17.7 x 88	17 x 25	17.7 x 88
vessels per rotor	6	12	6	12	6
Cat. No.	-	-	-	1064	-

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

EBA 280 SEROLOGY PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x EBA 280 centrifuge	1101	12	1.6 - 5	11 / 12 / 13 x 75	5,000	2,963
- 1 x swing-out rotor, 12-place	1142					
- 12 x bucket	1127-A					

1101SET1

EBA 280 BLOOD TUBE PACKAGE 2

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x EBA 280 centrifuge	1101	6	1.6 - 5	13 x 75	4,700	2,618
- 1 x swing-out rotor, 6-place	1146	6	4 - 7	13 x 100	4,700	3,112
- 1 x bucket (set)	1147-6	6	4 - 7	16 x 75	4,700	2,865
- 1 x adapter (set), 1-place	1053-6	6	8.5 - 10	16 x 100	4,700	3,112
- 6 x adapter, 1-place	1058					
- 1 x spacer (set)	0767-6					

1101SET2

EBA 280 BLOOD TUBE PACKAGE 3

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x EBA 280 centrifuge	1101	12	1.6 - 5	13 x 75	6,000	3,300
- 1 x angle rotor, 12-place	1139	12	4 - 7	13 x 100	6,000	3,300
- 12 x adapter, 1-place	1059	12	4 - 10	16 x 75	6,000	4,146
- 12 x adapter, 1-place	1058	12	8.5 - 10	16 x 100	6,000	4,146

1101SET3

EBA 280 BLOOD TUBE PACKAGE 4

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x EBA 280 centrifuge	1101	8	1.6 - 5	13 x 75	5,000	2,991
- 1 x swing-out rotor, 8-place	1148	8	4 - 7	16 x 75	5,000	2,991
- 8 x bucket	1131-A					
- 8 x bucket	1132-A					

1101SET4

EBA 280 SEROLOGY DECANTING PACKAGE 5

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x EBA 280 centrifuge	1101	12	5	12 x 75 / 100	5,000	2,879
- 1 x angle rotor, 12-place	1133					

1101SET5

EBA 280 S BLOOD TUBE PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x EBA 280 S centrifuge	1102	6	1.6 - 5	13 x 75	6,000	4,266
- 1 x angle rotor, 6-place	1146	6	4 - 7	13 x 100	6,000	5,071
- 1 x bucket (set)	1147-6	6	4 - 7	16 x 75	6,000	4,699
- 1 x adapter (set)	1053-6	6	8.5 - 10	16 x 100	6,000	5,071
- 6 x adapter, 1-place	1058					
- 1 x spacer (set)	0767-6					

1102SET1



PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



HAEMATOKRIT 200

Haematokrit determination in just 7 minutes

The HAEMATOKRIT 200 is a fast and efficient centrifuge for determining hematocrit count. It runs at 13,000 RPM and accommodates up to 24 capillary tubes to a maximum RCF of 16,060. Results can be clearly viewed with the integrated Haematocrit reader in the rotor lid.

— FEATURES

- RPM: 200 - 13,000 min⁻¹ – adjustable up to 10,000 RPM in increments of 10, above in increments of 100
- Max. RCF: 16,060
- Compact, high-performance hematocrit centrifuge
- IVD-conform according to directive 98/79/EC
- Maximum noise level of ≤ 56 dB(A)
- Impulse key for short cycle mode
- 2 individual acceleration and deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Paediatric clinics
- Manufacturers of analyzing systems
- Small hospitals
- Sports medicine



More information about the control panel
can be found on [page 198](#)



TECHNICAL DATA

HAEMATOKRIT 200

voltage *)	200 – 240 V 1 ~
frequency	50 – 60 Hz
consumption	270 VA
emission, immunity	EN/IEC 61326-1, class B
max. capacity	24 capillaries
max. RPM	13,000 min ⁻¹
max. RCF	16,060
running time	1 – 99 min, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	261 x 353 x 228 mm
weight	approx. 10 kg
max. noise level	≤ 56 dB (A)

Cat. No.

1801

100 – 127 V 1 ~ / 50–60 Hz


1801-01

emission, immunity

FCC class B

*) Other voltages on request.

AVAILABLE ROTOR



Rotor

max. RPM max. RCF	13,000 min ⁻¹ 16,060
max. capacity	24 capillaries
run up run down, braked in sec	9 16
angle max. noise level	90° 56 dB (A)
measuring lid	inclusive

Cat. No.

INCLUSIVE



Capillaries

Standard	
max. RCF ²⁾	16,060
radius in mm	85
Cat. No.	-



Adapter

boring Ø x L in mm	-
capillaries per rotor	24
Cat. No.	-

HOLDING TRAYS

The holding trays in rotor 2076 are easy to clean and disposable in the case of glass breakage.



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

MICROLITER CENTRIFUGES

Powerful results at the micro level



MIKRO 185
on page 32




MIKRO 200 | 200 R
on page 36



MIKRO 220 | 220 R
on page 42

02

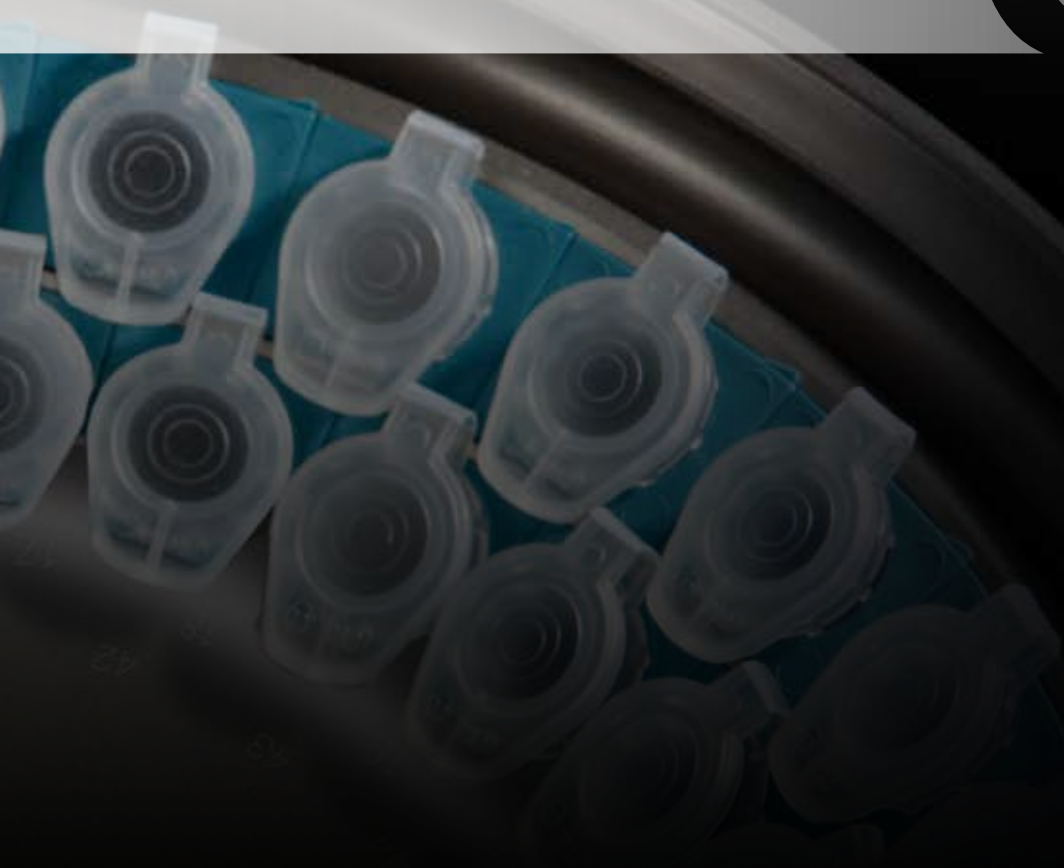

MIKRO 185

Small footprint with unmatched capacity

The MIKRO 185 accommodates 12, 18 or 24 samples and is suitable for a wide range of tasks, thanks to a maximum RCF of 18,845 and a choice of 4 rotors. Spin column kits (minipreps) can also be used thanks to the special design of the 1213-A rotor.

— FEATURES

- RPM: 200 - 14,000 min⁻¹ – Adjustable up to 10,000 RPM in increments of 10, above in increments of 100
- Max. RCF: 18,845
- Max. capacity: 24 x 2.0 ml
- Compact, high-performance microlitre centrifuge
- Choice of 4 rotors
- IVD-conform according to directive 98/79/EC
- Noise level of ≤ 54 dB (A) with rotor 1252-A
- Impulse button for short centrifugation
- Easy operation with keypad

— FIELDS OF APPLICATION

- Hospitals
- Pediatric clinics
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic Research
- Forensic laboratories
- Paternity testing laboratories
- Blood centers



More information about the control panel can be found on [page 198](#)



according to directive 98/79/EC



TECHNICAL DATA

MIKRO 185	
voltage *)	200 – 240 V 1 ~
frequency	50 – 60 Hz
consumption	330 VA
emission, immunity	EN/IEC 61326-1, class B
max. capacity	24 x 1.5 / 2.0 ml
max. RPM	14,000 min ⁻¹
max. RCF	18,845
running time	1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	261 x 353 x 228 mm
weight	approx. 11 kg
noise level	≤ 54 dB (A) with rotor 1252-A
Cat. No.	1203
100 – 127 V 1 ~ / 50–60 Hz	1203-01
emission, immunity	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS

ANGLE ROTORS		angle	max. RPM	max. capacity	Cat. No.	page
	angle rotor, 24-place	45°	14,000 min ⁻¹	24 x 2 ml	1226-A	34
	angle rotor, 12-place	45°	14,000 min ⁻¹	12 x 2 ml	1252-A	34
	angle rotor, 18-place	45°	14,000 min ⁻¹	18 x 2 ml	1258-A	35
	angle rotor, 18-place for spin column kits	45°	14,000 min ⁻¹	18 x 2 ml	1213-A	35

PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



ANGLE ROTOR, 24-PLACE | 1226-A

Rotor		Lid bioseal ⁵⁾	
max. RPM max. RCF	14,000 min ⁻¹ 18,845	Cat. No.	INCLUSIVE
max. capacity	24 x 2 ml		
run up run down, braked in sec	15 15		
angle max. noise level	45° 59 dB (A)		
Cat. No.	1226-A		



Vessels							
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	0.5
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36
max. RCF ²⁾	18,845	18,845	18,845	18,845	18,845	18,845	17,749
radius in mm	86	86	86	86	86	86	81
Cat. No.	microliter tubes						Pediatric

Adapter							
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	-	11.2 x 39	11.2 x 39
vessels per rotor	24	24	24	24	24	24	24
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788

ANGLE ROTOR, 12-PLACE | 1252-A

Rotor		Lid	
max. RPM max. RCF	14,000 min ⁻¹ 15,558	Cat. No.	INCLUSIVE
max. capacity	12 x 2 ml		
run up run down, braked in sec	15 15		
angle max. noise level	45° 54 dB (A)		
Cat. No.	1252-A		



Vessels							
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	0.5
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36
max. RCF ²⁾	15,558	15,558	15,558	15,558	15,558	15,558	14,462
radius in mm	71	71	71	71	71	71	66
Cat. No.	microliter tubes						Pediatric

Adapter							
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	-	11.2 x 39	11.2 x 39
vessels per rotor	12	12	12	12	12	12	12
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788

- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters 2031.

— ANGLE ROTOR, 18-PLACE | 1258-A

			
Rotor		Lid	
max. RPM max. RCF	14,000 min ⁻¹ 16,654	Cat. No.	INCLUSIVE
max. capacity	18 x 2 ml		
run up run down, braked in sec	15 15		
angle max. noise level	45° 56 dB (A)		
Cat. No.	1258-A		



Vessels							
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	0.5
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36
max. RCF ²⁾	16,654	16,654	16,654	16,654	16,654	16,654	15,558
radius in mm	76	76	76	76	76	76	71
Cat. No.	microliter tubes						Pediatric

Adapter							
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	-	10.2 x 19	11.2 x 39
vessels per rotor	18	18	18	18	18	18	9
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788

— ANGLE ROTOR, 18-PLACE | 1213-A

			
Rotor		Lid bioseal⁵⁾	
max. RPM max. RCF	14,000 min ⁻¹ 16,654	Cat. No.	INCLUSIVE
max. capacity	18 x 2 ml		
run up run down, braked in sec	16 15		
angle max. noise level	45° 57 dB (A)		
Cat. No.	1213-A		



Vessels								
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	1.5	2.0
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	11 x 38	11 x 38
max. RCF ²⁾	16,654	16,654	16,654	16,654	16,654	16,654	16,654	16,654
radius in mm	76	76	76	76	76	76	76	76
Cat. No.	microliter tubes						micro spin columns	

Adapter								
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	10.2x19.3	11.2x39	10.2x19.3	11.2x39
vessels per rotor	18	18	18	18	18	18	18	18
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	2031⁷⁾	-

- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters 2031.

MIKRO 200 | 200 R

Faster results in molecular biology

The MIKRO 200 and MIKRO 200 R are amongst the highest-speed microliter centrifuges in their class. Rotors are designed to spin microliter and PCR tubes. MIKRO 200 achieves a maximum RCF of 21,382 with up to 30 tubes, enabling rapid processing of samples and optimal separation, at low noise levels of 54 dB(A). This unit is available with refrigeration and a temperature range from -10 °C to +40 °C (MIKRO 200 R).

— FEATURES

- RPM: 500 - 15,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 21,382
- Max. capacity: 30 x 2.0 ml
- Choice of 4 rotors
- IVD-conform according to directive 98/79/EC
- Impulse key for short cycle mode
- Easy operation with keypad and control knob
- 4 program memories for more individuality
- 9 individual acceleration and deceleration stages
- Model 200 R coolable from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Pediatric clinics
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Forensic laboratories
- Molecular diagnostics



Centrifuge packages for the model can be found on [page 40](#)



More information about the control panel can be found on [page 198](#)



TECHNICAL DATA

	MIKRO 200 non-refrigerated	MIKRO 200 R refrigerated
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~
frequency	50 – 60 Hz	50 Hz
consumption	240 VA	450 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	30 x 1.5 / 2.0 ml	30 x 1.5 / 2.0 ml
max. RPM	15,000 min ⁻¹	15,000 min ⁻¹
max. RCF	21,382	21,382
running time	1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button)	1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button)
dimesions (WxDxH)	275 x 344 x 260 mm	281 x 553 x 260 mm
weight	approx. 11.5 kg	approx. 28 kg
noise level	≤ 58 dB (A) with rotor 2434	≤ 51 dB (A) with rotor 2437
temperature control, infinitely variable	-	from -10 to +40 °C
Cat. No.	2400	2405
100 – 127 V 1 ~ / 50–60 Hz	2400-01	2405-01
consumption	270 VA	630 VA
emission, immunity	FCC class B	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS

ANGLE ROTORS	angle	max. RPM	max. capacity	Cat. No.	page
 angle rotor, 24-place	45°	15,000 min ⁻¹	24 x 2 ml	2434	38
 angle rotor, 30-place	45° inside / 55° outside	15,000 min ⁻¹	30 x 2 ml	2437	38
 angle rotor, 24-place for spin column kits	45°	15,000 min ⁻¹	24 x 2 ml	2428	39
 angle rotor, 4-place	45°	15,000 min ⁻¹	4 x 8 PCR strips	2418-A	39

ANGLE ROTOR, 24-PLACE | 2434

Rotor		Lid bioseal ⁵⁾	
max. RPM max. RCF	15,000 min ⁻¹ 21,382	Cat. No.	INCLUSIVE
max. capacity	24 x 2 ml		
run up run down, braked in sec	20 28		
angle max. noise level	45° 53 dB (A)		
temperature in °C ¹⁾	+4		
Cat. No.	2434		



Vessels							
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	0.5
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36
max. RCF ²⁾	21,382	21,382	21,382	21,382	21,382	21,382	20,376
radius in mm	85	85	85	85	85	85	81
Cat. No.	microliter tubes						Pediatric

Adapter							
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	-	11.2x42.6	11.2x39
vessels per rotor	24	24	24	24	24	24	12
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788

ANGLE ROTOR, 30-PLACE | 2437

Rotor		Lid bioseal ⁵⁾	
max. RPM max. RCF	15,000 min ⁻¹ 21,382	Cat. No.	INCLUSIVE
max. capacity	30 x 2 ml		
run up run down, braked in sec	22 30		
angle max. noise level	45° inside / 55° outside 51 dB (A)		
temperature in °C ¹⁾	+4		
Cat. No.	2437		



Vessels							
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	0.5
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36
max. RCF ²⁾	21,382	21,382	21,382	21,382	21,382	21,382	20,376
radius in mm	85	85	85	85	85	85	81
Cat. No.	microliter tubes						Pediatric

Adapter							
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	-	11.2x41.3	11.2x39
vessels per rotor	30	30	30	30	30	30	15
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 24-PLACE | 2428

Rotor		+	Lid bioseal ⁵⁾	
max. RPM max. RCF	15,000 min ⁻¹ 21,382		Cat. No.	INCLUSIVE
max. capacity	24 x 2 ml			
run up run down, braked in sec	20 28			
angle max. noise level	45° 53 dB (A)			
temperature in °C ¹⁾	+4			
Cat. No.	2428			



Vessels									
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	1.5	2.0	0.5
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	11 x 38	11 x 38	10.7 x 36
max. RCF ²⁾	21,382	21,382	21,382	21,382	21,382	21,382	21,382	21,382	20,376
radius in mm	85	85	85	85	85	85	85	85	81
Cat. No.	microliter tubes						micro spin columns		Pediatric

									
Adapter									
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	-	10.2x19	-	11.2x42.6	11.2x39
vessels per rotor	24	24	24	24	24	24	24	24	12
Cat. No.	2024	2024	2023	2023	2031 ⁷⁾	-	2031 ⁷⁾	-	0788

— ANGLE ROTOR, 4-PLACE | 2418-A

Rotor		+	Lid	
max. RPM max. RCF	15,000 min ⁻¹ 14,338		Cat. No.	E3243
max. capacity	4 x 8 PCR strips			
run up run down, braked in sec	19 28			
angle	45°			
temperature in °C ¹⁾	+4			
Cat. No.	2418-A			



Vessels		
capacity in ml	0.2	0.2
Ø x L in mm	6 x 18	-
max. RCF ²⁾	14,338	14,338
radius in mm	57	57
Cat. No.	-	PCR strips

+		
Adapter		
boring Ø x L in mm	6.5 x 15.5	6.5 x 15.5
vessels per rotor	32	4 x 8
Cat. No.	-	-

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

PACKAGES

MIKRO 200 MICROLITER TUBES PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 200	2400	24	0.2 - 2.0	11 x 38	15,000	21,382
- 1 x angle rotor 24-place, incl. lid bioseal	2434	24	0.5	10.7 x 36	15,000	20,376

2400SET1

MIKRO 200 MICROLITER TUBES PACKAGE 2

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 200	2400	30	0.2 - 2.0	11 x 38	15,000	20,627
- 1 x angle rotor 30-place, incl. lid bioseal	2437	30	0.5	10.7 x 36	15,000	20,124

2400SET2

MIKRO 200 R MICROLITER TUBES PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 200 R	2405	24	0.2 - 2.0	11 x 38	15,000	21,382
- 1 x angle rotor 24-place, incl. lid bioseal	2434	24	0.5	10.7 x 36	15,000	20,376

2405SET1

MIKRO 200 R MICROLITER TUBES PACKAGE 2


		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 200 R	2405	30	0.2 - 2.0	11 x 38	15,000	21,382
- 1 x angle rotor 30-place, incl. lid bioseal	2437	30	0.5	10.7 x 36	15,000	20,124

2405SET2

MIKRO 200 R SPIN COLUMN PACKAGE 3

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 200 R	2405	24	2.0	11 x 38	15,000	21,382
- 1 x angle rotor 24-place, incl. lid bioseal for spin column kits	2428					


2405SET3



DID YOU KNOW?

The Download Center on our website allows you to access the most up to date documents including catalogs, brochures, data sheets and certificates.

Try it now: www.hettichlab.com/downloadcenter

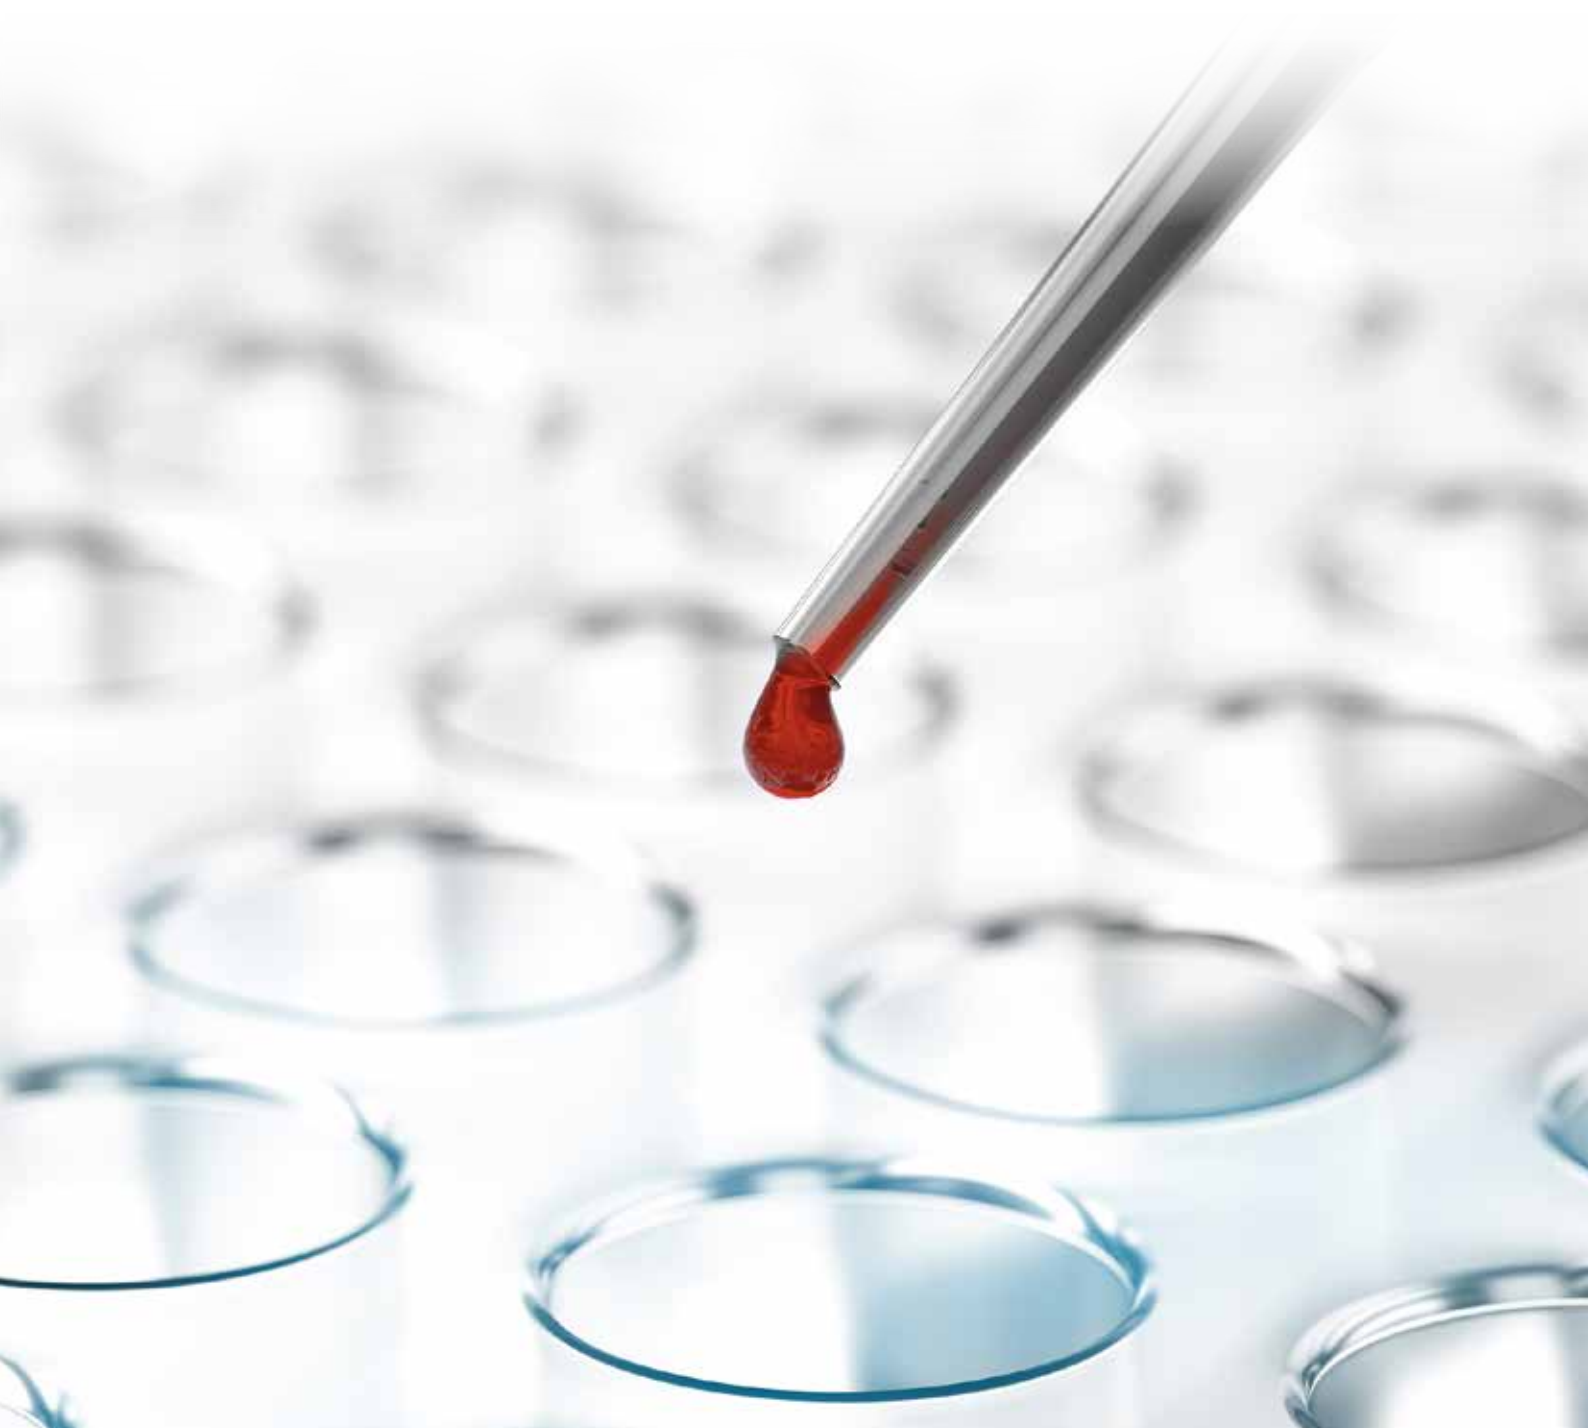

MIKRO 220 | 220 R

Fast and flexible

The MIKRO 220 spins at an unmatched speed of 18,000 RPM and delivers an RCF of 31,514 in just 26 seconds. Ultimate flexibility is provided by a choice of 7 different rotors from 0.2 ml microliter tubes to 50 ml conical tubes, allowing for numerous research applications on a single machine. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (MIKRO 220 R).

— FEATURES

- RPM: 500 - 18,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 31,514
- Max. capacity: 60 x 2.0 ml
- Compact, high-performance microlitre centrifuge
- Choice of 8 rotors
- IVD-conform according to directive 98/79/EC
- Impulse key for short cycle mode
- Easy operation with keypad and control knob
- Impulse key for short cycle mode
- 9 program memories for more individuality
- 9 individual acceleration and deceleration stages
- Model 220 R coolable from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Pediatric clinics
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Forensic laboratories
- Molecular diagnostics



Centrifuge packages for the model can be found on [page 48](#)



More information about the control panel can be found on [page 198](#)



according to directive 98/79/EC



TECHNICAL DATA

	MIKRO 220 non-refrigerated	MIKRO 220 R refrigerated
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~
frequency	50 – 60 Hz	50 Hz
consumption	510 VA	850 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	48 x 1.5 / 2.0 ml, 6 x 50 ml	48 x 1.5 / 2.0 ml, 6 x 50 ml
max. RPM	18,000 min ⁻¹	18,000 min ⁻¹
max. RCF	31,514	31,514
running time	1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button)	1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	330x420x313 mm	330x650x313 mm
weight	approx. 21 kg	approx. 42 kg
noise level	≤ 58 dB (A) with rotor 1189-A	≤ 59 dB (A) with rotor 1016
temperatur control, infinitely variable	-	from -20 to +40 °C
Cat. No.	2200	2205
100 – 127 V 1 ~ / 60 Hz	2200-01	2205-01
consumption	510 VA	950 VA
emission, immunity	FCC class B	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

	angle	max. RPM	max. capacity	Cat. No.	page
 Swing-out rotor, 24-place	90°	13,000 min ⁻¹	24 x 2 ml	1154-L	45

ANGLE ROTOR

 Angle rotor, 24-place	45°	18,000 min ⁻¹	24 x 2 ml	1195-A	44
 Angle rotor, 30-place	45°	14,000 min ⁻¹	30 x 2 ml	1189-A	44
 Angle rotor, 48-place	45°	14,000 min ⁻¹	48 x 2 ml	1158-L	45
 Angle rotor, 6-place	45°	6,000 min ⁻¹	6 x 50 ml	1016	46
 Drum rotor, 6-place	90°	13,000 min ⁻¹	60 x 2 ml	1161	46
 Angle rotor, 12-place	35°	6,000 min ⁻¹	12 x 15 ml	1015	47
 Angle rotor, 6-place	45°	14,000 min ⁻¹	6 x PCR strips	1160	47

ANGLE ROTOR, 24-PLACE | 1195-A

		+						
Rotor		Lid bioseal 5)		INCLUSIVE				
max. RPM max. RCF	18,000 min ⁻¹ 31,514	Cat. No.						
max. capacity	24 x 2 ml							
run-up run-down, braked in sec	26 23							
angle	45°							
temperature in °C ¹⁾	+3							
Cat. No.	1195-A							
Vessels								
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	0.5	
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36	
max. RCF ²⁾	31,514	31,514	31,514	31,514	31,514	31,514	30,065	
radius in mm	87	87	87	87	87	87	83	
Cat. No.	microliter tubes						Pediatric	
Adapter								
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	10.2x19.3	11.2x40.8	11.2x39	
vessels per rotor	24	24	24	24	24	24	12	
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788	

ANGLE ROTOR, 30-PLACE | 1189-A

								
Rotor				Lid bioseal ⁵⁾				INCLUSIVE
max. RPM max. RCF	14,000 min ⁻¹ 21,255			Cat. No.				
max. capacity	30 x 2 ml							
run-up run-down, braked in sec	20 22							
angle max. noise level	45° 58 dB (A)							
temperature in °C ¹⁾	+3							
Cat. No.	1189-A							
Vessels								
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0	0.5	
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36	
max. RCF ²⁾	21,255	21,255	21,255	21,255	21,255	21,255	20,379	
radius in mm	97	97	97	97	97	97	93	
Cat. No.	microliter tubes						Pediatric	
								
Adapter								
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	10.2x19.3	11.2x40.9	11.2x39	
vessels per rotor	30	30	30	30	30	30	15	
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788	

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 48-PLACE | 1158-L



+

Lid bioseal ⁵⁾

Cat. No.

INCLUSIVE

Rotor						
max. RPM	14,000 min ⁻¹					
max. RCF	21,255 outside / 18,845 inside					
max. capacity	48 x 2 ml					
run-up run-down, braked in sec	21 22					
angle max. noise level	45° 59 dB (A)					
temperature in °C ¹⁾	-4					
Cat. No.	1158-L					

+

Adapter

						
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	10.2x19.3	11.4x39
vessels per rotor	48	48	48	48	48	48
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-

Vessels						
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0
Ø x L in mm	6x18	6 x 45	8 x 30	8x45	11x38	11x38
max. RCF ²⁾	21,255 / 18,845	21,255 / 18,845	21,255 / 18,845	21,255 / 18,845	21,255 / 18,845	21,255 / 18,845
radius in mm	97 / 86	97 / 86	97 / 86	97 / 86	97 / 86	97 / 86
Cat. No.	microliter tubes					



— SWING-OUT ROTOR, 24-PLACE | 1154-L

				INCLUSIVE		
Rotor						
max. RPM max. RCF	13,000 min ⁻¹ 18,516					
max. capacity	24 x 2 ml					
run-up run-down, braked in sec	25 26					
angle max. noise level	90° 60 dB (A)					
temperature in °C ¹⁾	+1					
Cat. No.	1154-L					
Vessels						
capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38
max. RCF ²⁾	18,516	18,516	18,516	18,516	18,516	18,516
radius in mm	98	98	98	98	98	98
Cat. No.	microliter tubes					
Adapter						
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	10.2x19.3	11.5x38.5
vessels per rotor	24	24	24	24	24	24
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-




- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 6-PLACE | 1016



Rotor

max. RPM max. RCF	6,000 min ⁻¹ 4,025
max. capacity	6 x 50 ml
run-up run-down, braked in sec	14 17
angle max. noise level	35° 59 dB (A)
temperature in °C ¹⁾	-20
Cat. No.	1016



Vessels

capacity in ml	7	15	25	50	9-10	10	1.6-5	4-7	5	15	50	30	50
Ø x L in mm	12x100	17x100	24x100	34x100	16x92	15x102	13x75	13x100	17x59	17x120	29x115	26x95	29x107
max. RCF ²⁾	3,944	3,783	3,703	4,025	3,783	3,783	2,978	3,783	3,622	3,824	3,824	3,703	3,904
radius in mm	98	94	92	100	94	94	74	94	90	95	95	92	97
Cat. No.	tubes²⁾				blood collection / urine tubes				-	tubes with screw cap			



Adapter

boring Ø x L in mm	13 x 92	17.5 x 95	26 x 88	35 x 96	17.5 x 95	17 x 51	17.5 x 95	17.5 x 95	17 x 51	17 x 98	30 x 98	26 x 88	29 x 95
vessels per rotor	18	6	6	6	6	6	6	6	6	6	3	6	6
Cat. No.	1632	1635	1633	-	1635	1635	1635	1635	1649	1631	1641	1633	1634

— DRUM ROTOR, 6-PLACE | 1161




Rotor

max. RPM max. RCF	13,000 min ⁻¹ 14,171
max. capacity	60 x 2 ml
run-up run-down, braked in sec	17 18
angle max. noise level	90° 60 dB (A)
temperature in °C ¹⁾	-3
Cat. No.	1161



Lid

Cat. No.	INCLUSIVE
-----------------	------------------



Vessels

capacity in ml	0.2	0.4	0.5	0.8	1.5	2.0
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38
max. RCF ²⁾	14,171	14,171	14,171	14,171	14,171	14,171
radius in mm	75	75	75	75	75	75
Cat. No.	microliter tubes					



Adapter

boring Ø x L in mm	6 x 40	6 x 40	8.4 x 43	8.4 x 43	10.8 x 37	10.8 x 37
vessels per rotor	192	192	126	126	60	60
Cat. No.	1378	1378	1379	1379	1377	1377

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 12-PLACE | 1015



Rotor

max. RPM max. RCF	6,000 min ⁻¹ 4,146
max. capacity	12 x 15 ml
run-up run-down, braked in sec	14 16
angle max. noise level	35° 60 dB (A)
temperature in °C ¹⁾	-20
Cat. No.	1015



Vessels

capacity in ml	5	15	1.1–1.4	2.6–3.4	2.7–3	4.5–5	4.9	7.5–8.5	9–10	10	1.6–5	4–7	8.5–10	5	15
Ø x L in mm	12x75	17x100	8x66	13x65	11x66	11x92	13x90	15x92	16x92	15x102	13x75	13x100	16x100	17x59	17x120
max. RCF ²⁾	3,300	4,146	3,300	3,300	3,300	4,146	4,146	4,146	4,146	4,146	3,300	4,146	4,146	3,180	4,146
radius in mm	82	103	82	82	82	103	103	103	103	103	82	103	103	79	103
Cat. No.	tubes ²⁾		blood collection / urine tubes										-	-	



Adapter

boring Ø x L in mm	13.5 x 60	17.7 x 88	13.5 x 60	13.5 x 60	13.5 x 60	17.7 x 88	17.7 x 88	17.7 x 88	17.7 x 88	17.7 x 88	13.5 x 60	13.5 x 79	17.7 x 88	17 x 25	17.7 x 88
vessels per rotor	12	12	12	12	12	12	12	12	12	12	12	12	12	12	6
Cat. No.	1054-A	-	1054-A	1054-A	1054-A	-	-	-	-	-	1054-A	1058	-	1064	-

— ANGLE ROTOR, 6-PLACE | 1160



Rotor

max. RPM max. RCF	14,000 min ⁻¹ 18,845
max. capacity	6 x 8 PCR strips
run up run down, braked in sec	20 22
angle temperature in °C ¹⁾	45° -4
Cat. No.	1160



Lid

Cat. No.	1162
-----------------	-------------



Vessels

capacity in ml	0.2	0.2
Ø x L in mm	6x18	-
max. RCF ²⁾	18,845	18,845
radius in mm	86	86
Cat. No.	-	PCR strips



Adapter

boring Ø x L in mm	6.5 x 15.5	6.5 x 15.5
vessels per rotor	48	6 x 8
Cat. No.	-	-

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

MIKRO 220 MICROLITER TUBES PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 220	2200	24	0.2 - 2.0	11 x 38	18,000	31,514
- 1 x angle rotor 24-place, incl. lid bioseal	1195-A	24	0.5	10.7 x 36	18,000	30,065

2200SET1

MIKRO 220 MICROLITER TUBES PACKAGE 2

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 220	2200	30	0.2 - 2.0	11 x 38	14,000	21,255
- 1 x angle rotor 30-place, incl. lid bioseal	1189-A	30	0.5	10.7 x 36	14,000	20,379

2200SET2

MIKRO 220 R MICROLITER TUBES PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 220 R	2205	24	0.2 - 2.0	11 x 38	18,000	31,514
- 1 x angle rotor 24-place, incl. lid bioseal	1195-A	24	0.5	10.7 x 36	18,000	30,065

2205SET1

MIKRO 220 R MICROLITER TUBES PACKAGE 2

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x MIKRO 220 R	2205	30	0.2 - 2.0	11 x 38	14,000	21,255
- 1 x angle rotor 30-place, incl. lid bioseal	1189-A	30	0.5	10.7 x 36	14,000	20,379

2205SET2



DID YOU KNOW?

The Download Center on our website allows you to access the most up to date documents including catalogs, brochures, data sheets and certificates.

Try it now: www.hettichlab.com/downloadcenter



BENCHTOP CENTRIFUGES

Specialists in diversity



ROTOFIX 32 A
on page 52



UNIVERSAL 320 | 320 R
on page 64



ROTINA 380 | 380 R
on page 88

03



ROTINA 420 | 420 R
on page 100



ROTANTA 460 | 460 R
on page 110



ROTOFIX 46 | 46 H
on page 128

ROTOFIX 32 A

Rugged and indispensable

For decades, the ROTOFIX 32 A has set the standard in daily lab routine thanks to its versatility and solid construction. The benchtop centrifuge spins sample volumes up to 6 x 94 ml, 40 blood collection tubes or 8 x 50 ml conical tubes with a simple user interface. Hettich's cytology rotors are compatible with most existing funnel/slide systems and have bio-containment lids.

— FEATURES

- RPM: 500 - 6,000 min⁻¹ – adjustable in increments of 100
- Max. RCF: 4,226
- Max. capacity: 4 x 100 ml / 6 x 94 ml
- Choice of 9 rotors
- IVD-conform according to directive 98/79/EC
- Easy operation with keypad
- 2 individual deceleration stages

— FIELDS OF APPLICATION

- Hospitals
- Veterinary laboratories
- Cell culture laboratories
- University / Academic research
- Pharmaceutical laboratories
- Physician's Office Laboratory (POL)



Centrifuge packages for the model can be found on [page 63](#)



More information about the control panel can be found on [page 198](#)

CYTO

Cyto system available for this model.
More information on [page 178](#)



according to directive 98/79/EC



TECHNICAL DATA

ROTOFIX 32 A	
voltage *)	208 – 240 V 1 ~
frequency	50 – 60 Hz
consumption	300 VA
emission, immunity	EN/IEC 61326-1, class B
max. capacity	4 x 100 ml / 6 x 94 ml
max. RPM	6,000 min ⁻¹
max. RCF	4,226
running time	1–99 min, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	366x430x257 mm
weight	approx. 23 kg
noise level	52 dB (A) with rotor 1628
Cat. No.	1206
100 – 127 V 1 ~ / 50 – 60 Hz *)	1206-01
emission, immunity	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 4-place	90°	4,000 min ⁻¹	4x100 ml	1624	54
	swing-out rotor, 4-place	90°	4,000 min ⁻¹	4x100 ml	1324	57
	swing-out rotor, 6-place	90°	4,000 min ⁻¹	6x50 ml	1619	59
	swing-out rotor, 8-place	45°	4,000 min ⁻¹	8x50 ml	1617	59
	swing-out rotor, 8-place	90°	4,000 min ⁻¹	8x15 ml	1611	60
	swing-out rotor, 12-place	55° / 60° / 80°	4,000 min ⁻¹	12x15 ml	1628	60

ANGLE ROTORS

	angle rotor, 8-place	45°	4,000 min ⁻¹	8x50 ml	1418	61
	angle rotor, 6-place	35°	6,000 min ⁻¹	6x94 ml	1620A	62
	angle rotor, 12-place	35°	6,000 min ⁻¹	12x15 ml	1613	63

SWING-OUT ROTOR, 4-PLACE | 1624



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,451
max. capacity	4 x 50 ml
run-up run-down, braked in sec	22 25
angle max. noise level	90° 55 dB (A)
Cat. No.	1624



Vessels

capacity in ml	5	5	6	7	9	9	15	15	20	25	45	50
Ø x L in mm	12x75	12x75	12 x 82	12 x 100	14 x 100	14 x 100	17 x 100	17 x 100	21 x 100	24 x 100	31 x 100	34 x 100
max. RCF ²⁾	2,057	2,164	2,308	2,308	2,308	2,415	2,308	2,451	2,361	2,451	2,361	2,451
radius in mm	115	121	129	129	129	135	129	137	132	137	132	137

Cat. No.

tubes²⁾


Carrier

boring Ø x L in mm	12.5x64.4	13.5x65	12.5x71.5	12.5x71.5	14.6x74	14.6x78	17.6x71.5	17.6x78	21.5x74	26x78	32x74	35x78
vessels per rotor	16	68	16	16	20	40	16	28	8	8	4	4
Cat. No.	1369-91	1372	1369-92	1369-92	1370	1741	1369	1742	1346	1745	1345	1746

Vessels

capacity in ml	1.1–1.4	2.6–3.4	4–5.5	4.9	1.6–5	4–7	1.6–5	4–7	4–7	4–7	4–7	8.5–10	30	1–8
Ø x L in mm	8 x 66	13 x 65	15x75	13x90	13x75	16x75	13x75	16x75	13x100	13x100	13x100	16x100	26x95	simple / multiple
max. RCF ²⁾	2,415	2,325	2,325	2,451	2,129	2,361	2,325	2,325	2,361	2,361	2,451	2,451	2,451	1,646
radius in mm	135	130	130	137	119	132	130	130	132	132	137	137	137	92

Cat. No.

blood collection / urine vessels

- cyto chambers



Carrier

boring Ø x L in mm	14.6x78	17.6x78	17.6x78	14.6x78	14.6x78	17.6x71.5	17.6x78	17.6x78	17.6x71.5	14.6x74	13.5x78	17.6x71.5	26x78	-
vessels per rotor	40	28	28	40	40	16	28	28	16	20	28	16	8	4
Cat. No.	1741	1742	1742	1741	1741	1369⁴⁾	1742	1742	1369⁴⁾	1370⁴⁾	1739	1369⁴⁾	1745	1660

CYTO


Cyto system available for this model.
More information on page 178


- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 4) Please remove the spacer.
- 16) Packed in units of 10 pieces.
- 20) Vacutainers made of glass may not be used.

— SWING-OUT ROTOR, 4-PLACE | 1624


			
Rotor		Bucket	
max. RPM max. RCF	4,000 min ⁻¹ 1,968	Cat. No.	1366
max. capacity	48 x 4 ml		
run-up run-down, braked in sec	22 25		
angle max. noise level	90° 56 dB (A)		
Cat. No.	1624		





	
Vessels	
capacity in ml	1.5 2.0 1 3 4
Ø x L in mm	11 x 38 11 x 38 6 x 45 10 x 60 12 x 60
max. RCF ²⁾	1,968 1,968 1,950 1,932 1,932
radius in mm	110 110 109 108 108
Cat. No.	microliter tubes Rhesus tubes ²⁾

	
Adapter	
boring Ø x L in mm	11.5 x 38 11.5 x 38 6.5 x 23 10.5 x 23 12.5 x 44
vessels per rotor	36 36 120 48 48
Cat. No.	5277 5277 1357 1327 1326

— SWING-OUT ROTOR, 4-PLACE | 1624

			
Rotor		Bucket	
max. RPM max. RCF	4,000 min ⁻¹ 2,665	Lid bioseal ⁵⁾	1492
max. capacity	4 x 100 ml	Cat. No.	1481
run-up run-down, braked in sec	22 25		
angle max. noise level	90° 55 dB (A)		
Cat. No.	1624		



	
Vessels	
capacity in ml	0,5 1,5 2,0 1 3 5 6 7 9 15 25 50 94 100
Ø x L in mm	10.7 x 36 11 x 38 11 x 38 6 x 45 10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 24 x 100 34 x 100 38 x 102 44 x 100
max. RCF ²⁾	2,379 2,451 2,451 2,594 2,630 2,558 2,558 2,558 2,540 2,540 2,433 2,415 2,612 2,558
radius in mm	133 137 137 145 147 143 143 143 142 142 136 135 146 143
Cat. No.	Pediatric microtubes Rhesus tubes ²⁾
	
Adapter	
boring Ø x L in mm	11.2 x 38 11.2 x 38 11.2 x 38 6.5 x 34 10.5 x 43 13.4 x 48 13.4 x 48 13.4 x 48 17.6 x 91 17.6 x 91 25.2 x 87 35.2 x 87 38.5 x 92 45.9 x 98
vessels per rotor	20 20 20 108 36 20 20 20 16 16 4 4 4 4
Cat. No.	1351 1351 1351 1339 1343 1383 1383 1383 1329 1329 1330 1331 1396 0761


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

The max. RCF for glass tubes annotated with footnote 2) is 4,000.


5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.

SWING-OUT ROTOR, 4-PLACE | 1624

	
Rotor	
max. RPM max. RCF	4,000 min ⁻¹ 2,665
max. capacity	4 x 100 ml
run-up run-down, braked in sec	22 25
angle max. noise level	90° 55 dB (A)
Cat. No.	1624

	
Bucket	
Lid bioseal ⁵⁾	1492
Cat. No.	1481



	
Vessels	
capacity in ml	1.1–1.4 2.7–5 2.6–4.9 4–8.5 9–10 10 1.6–7 4–10 5 15 50 12 25 30 50
Ø x L in mm	8 x 66 11x66/92 13x65/90 15x75/92 16x92 15x102 13x75/100 16x75/100 17x59 17x120 29x115 17 x 100 25 x 90 25 x 110 29 x 115
max. RCF ²⁾	2,576 2,558 2,558 2,576 2,540 2,665 2,558 2,522 2,665 2,665 2,665 2,665 2,343 2,665 2,665
radius in mm	144 143 143 144 142 149 143 141 149 149 149 149 131 149 149
Cat. No.	blood collection / urine vessels - tubes with screw cap

	
Adapter	
boring Ø x L in mm	9x49 13.4x48 13.4x48 15.6x47 17.6x91 17.6x91 13.4x48 16.5x56 17x45 17x90 30x90 17x80 26x72 26x80 29.5x80
vessels per rotor	28 20 20 16 16 16 20 16 12 4 4 4 4 4 4
Cat. No.	1457 1383 1383 1459 1329 1329⁴⁾ 1383 1348 6341 1347 1384 6311 1363 1365 6318


	
Vessels	
capacity in ml	10 30 50 85 30
Ø x L in mm	16 x 80 26 x 95 29x107 38x106 44x105
max. RCF ²⁾	2,522 2,451 2,630 2,612 2,540
radius in mm	141 137 147 146 142
Cat. No.	tubes with screw cap 0534⁶⁾

	
Adapter	
boring Ø x L in mm	16.5x56 26x83 29x93 38.5x92 45.9x98
vessels per rotor	16 4 4 4 4
Cat. No.	1348 4417 4416 1396 0765


- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3) When using these tubes, bucket 1490 cannot be closed with lid 1492.
- 4) Please remove spacer.
- 5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.


SWING-OUT ROTOR, 4-PLACE | 1324


	
Rotor	
max. RPM max. RCF	4,000 min ⁻¹ 2,630
max. capacity	4 x 100 ml
run-up run-down, braked in sec	27 30
angle max. noise level	90° 55 dB (A)
Cat. No.	1324


	
Bucket	
Lid bioseal ⁵⁾	1492
Cat. No.	1490




	
Vessels	
capacity in ml	0.5 1.5 2.0 1 3 4 5 6 7 9 15 25 50 94 100
Ø x L in mm	10.7x36 11x38 11x38 6x45 10x60 10x88 12x75 12x82 12x100 14x100 17x100 24x100 34x100 38x102 44x100
max. RCF ²⁾	2,343 2,415 2,415 2,558 2,594 2,594 2,522 2,522 2,522 2,504 2,504 2,397 2,379 2,576 2,522
radius in mm	131 135 135 143 145 145 141 141 141 140 140 134 133 144 141
Cat. No.	Pediatric microliter tubes Rhesus tubes²⁾

	
Adapter	
boring Ø x L in mm	11.2x38 11.2x38 11.2x38 6.5x34 10.5x43 10.5x43 13.4x48 13.4x48 13.4x48 17.6x91 17.6x91 25.2x87 35.2x87 38.5x92 45.9x100.5
vessels per rotor	20 20 20 108 36 36 20 20 20 16 16 4 4 4 4
Cat. No.	1351 1351 1351 1339 1343 1343 1383 1383 1383 1329 1329 1330 1331 1396 0761

	
Vessels	
capacity in ml	1.1–1.4 2.6–3.4 4.9 2.7–3 4.5–5 4–5.5 7.5–8.5 9–10 10 1.6–5 4–7 4–7 8.5–10 5 15
Ø x L in mm	8 x 66 13x65 13x90 11x66 11x92 15x75 15x92 16x92 15x102 13x75 13x100 16x75 16x100 17x59 17x120
max. RCF ²⁾	2,540 2,522 2,522 2,522 2,522 2,540 2,540 2,504 2,630 2,522 2,522 2,486 2,486 2,630 2,630
radius in mm	142 141 141 141 141 142 142 140 147 141 141 139 139 147 147
Cat. No.	blood collection / urine vessels - -

	
Adapter	
boring Ø x L in mm	9x47 13.4x48 13.4x48 13.4x48 13.4x48 15.6x47 15.6x47 17.6x91 17.6x91 13.4x48 13.4x48 16.5x56 16.5x56 17x45 17x90
vessels per rotor	28 20 20 20 20 16 16 16 16 20 20 16 16 12 4
Cat. No.	1457 1383 1383 1383 1383 1459 1459 1329 1329⁴⁾ 1383 1383 1348 1348 6341 1347

	
Vessels	
capacity in ml	15 ³⁾ 30 50 12 25 30 50 10 30 50 85 30
Ø x L in mm	17x120 25 x 110 29 x 115 17 x 100 25 x 90 25 x 110 29 x 115 16 x 80 26 x 95 29x107 38x106 44x105
max. RCF ²⁾	2,630 2,630 2,630 2,630 2,308 2,630 2,630 2,486 2,415 2,594 2,576 2,504
radius in mm	147 147 147 147 129 147 147 139 135 145 144 140
Cat. No.	tubes with screw cap 0534⁶⁾

	
Adapter	
boring Ø x L in mm	17x107 26x80 30x90 17x80 26x72 26x80 29.5x80 16.5x56 26x83 29x93 38.5x92 45.9x100.5
vessels per rotor	12 4 4 4 4 4 4 16 4 4 4 4
Cat. No.	1356 1365 1384 6311 1363 1365 6318 1348 4417 4416 1396 0765


SWING-OUT ROTOR, 4-PLACE | 1324


	
Rotor	
max. RPM max. RCF	4,000 min ⁻¹ 2,612
max. capacity	4 x 50 ml
run-up run-down, braked in sec	27 30
angle	90° 56 dB (A)
Cat. No.	1324




	
Bucket	
Cat. No.	1398



	
Vessels	
capacity in ml	5 6 7 9 15 2.6–3.4 2.7–3 4–5.5 4.5–5 4.9 9–10 10 1.6–5 4–7 4–7
Ø x L in mm	12x75 12x82 12x100 14x100 17x100 13x65 11x66 15x75 11x92 13x90 16x92 15x102 13x75 13x100 16x75
max. RCF ²⁾	2,486 2,486 2,486 2,522 2,522 2,486 2,486 2,272 2,486 2,486 2,522 2,522 2,486 2,486 2,397
radius in mm	139 139 139 141 141 139 139 127 139 139 141 141 139 139 134
Cat. No.	tubes²⁾ blood collection / urine vessels

	
Adapter	
boring Ø x L in mm	13.4x57.5 13.4x57.5 13.4x57.5 17.5x81 17.5x81 13.4x57.5 13.4x57.5 17.5x81 13.4x57.5 13.4x57.5 17.5x81 17.5x81 13.4x57.5 13.4x57.5 17.5x81
vessels per rotor	20 20 20 16 16 20 20 16 20 20 16 16 20 20 16
Cat. No.	1486 1486 1486 1482A 1482A 1486 1486 1482A 1486 1486 1482A 1482A 1486 1486 1482A

	
Vessels	
capacity in ml	8.5–10 12 15 50 12 50
Ø x L in mm	16x100 17x102 17x120 29x115 17x100 29x115
max. RCF ²⁾	2,397 2,451 2,612 2,576 2,522 2,576
radius in mm	134 137 146 144 141 144
Cat. No.	blood collection / urine vessels tubes with screw cap

	
Adapter	
boring Ø x L in mm	17.5x81 17.5x74 17x100 30x98 17.5x81 30x98
vessels per rotor	16 12 16 4 16 4
Cat. No.	1482A 1487 1483A 1484 1482A 1484⁴⁾

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
4) Please remove spacer.

— SWING-OUT ROTOR, 6-PLACE | 1619




Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,701
max. capacity	6 x 50 ml
run-up run-down, braked in sec	22 25
angle max. noise level	90° 54 dB (A)
Cat. No.	1619



Vessels

capacity in ml	15	50
Ø x L in mm	17 x 120	29 x 115
max. RCF ²⁾	2,701	2,701
radius in mm	151	151
Cat. No.	tubes with screw cap	



Adapter

boring Ø x L in mm	17 x 84	30 x 87.5
vessels per rotor	6	6
Cat. No.	1462-A	-



— SWING-OUT ROTOR, 8-PLACE | 1617




Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,469
max. capacity	8 x 50 ml
run-up run-down, braked in sec	22 25
angle max. noise level	45° 53 dB (A)
Cat. No.	1617



Vessels

capacity in ml	15	50
Ø x L in mm	17 x 120	29 x 115
max. RCF ²⁾	2,469	2,469
radius in mm	138	138
Cat. No.	tubes with screw cap	



Adapter

boring Ø x L in mm	17 x 84	30 x 94.5
vessels per rotor	8	8
Cat. No.	1462-A	-



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 8-PLACE | 1611



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,415
max. capacity	8 x 15 ml
run-up run-down, braked in sec	22 25
angle max. noise level	90° 53 dB (A)
Cat. No.	1611



Vessels

															
capacity in ml	5	6	7	10	15	2.6–3.4	2.7–3	4–5.5	4.5–5	7.5–8.5	1.6–5	4–7	4–7	8.5–10	
Ø x L in mm	12x75	12x82	12x100	13x100	17x100	13x65	11x66	15x75	11x92	15x92	13x75	13x100	16x75	16x100	
max. RCF ²⁾	1,914	1,914	2,415	2,415	2,415	1,914	1,914	1,914	2,415	2,415	1,914	2,415	1,914	2,415	
radius in mm	107	107	135	135	135	107	107	107	135	135	107	135	107	135	
Cat. No.	tubes²⁾					blood collection / urine vessels									



Bucket

boring Ø x L in mm	13x53	13x53	13.2x81	13.2x81	17.5x81	13 x 53	13 x 53	17.5 x 53	13.2 x 81	17.5 x 81	13 x 53	13.2 x 81	17.5 x 53	17.5 x 81
vessels per rotor	8	8	8	8	8	8	8	8	8	8	8	8	8	8
Cat. No.	1131-A	1131-A	1643	1643	1644	1131-A	1131-A	1132-A	1643	1644	1131-A	1643	1132-A	1644

SWING-OUT ROTOR, 12-PLACE | 1628



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,683
max. capacity	12 x 15 ml
run-up run-down, braked in sec	22 25
angle max. noise level	55° / 60° / 80° 52 dB (A)
Cat. No.	1628



Vessels

capacity in ml	5	15	2.6–3.4	2.7–3	4–5.5	7.5–8.5	1.6–5	4–7	8.5–10	
Ø x L in mm	12x75	17x100	13x65	11x66	15x75	15x92	13x75	16x75	16x100	
max. RCF ²⁾	2,236	2,683	2,236	2,236	2,254	2,683	2,236	2,254	2,683	
radius in mm	125	150	125	125	126	150	125	126	150	
Cat. No.	tubes²⁾		blood collection / urine vessels							



Bucket

boring Ø x L in mm	13.2x53	17.5x79	13.2x53	13.2x53	17.5x53	17.5x79	13.2x53	17.5x53	17.5x79	
vessels per rotor	12	12	12	12	12	12	12	12	12	
Cat. No.	1127-A	1621	1127-A	1127-A	1122	1621	1127-A	1122	1621	

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

ANGLE ROTOR, 8-PLACE | 1418



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,612
max. capacity	8 x 50 ml
run-up run-down, braked in sec	36 43
angle max. noise level	45° 53 dB (A)
Cat. No.	1418



Vessels

capacity in ml	5	15	1.1-1.4	2.6-3.4	2.7-3	9-10	1.6-5	4-7	8.5-10	12	15	50	12	50	50
Ø x L in mm	12 x 75	17 x 100	8 x 66	13 x 65	11 x 66	16 x 92	13 x 75	13 x 100	16 x 100	17 x 102	17 x 120	29 x 115	17 x 100	29 x 115	29 x 107
max. RCF ²⁾	2,182	2,540	2,182	2,182	2,182	2,540	2,182	2,612	2,540	2,540	2,594	2,486	2,540	2,486	2,486
radius in mm	122	142	122	122	122	142	122	146	142	142	145	139	142	139	139

Cat. No.

tubes ²⁾	blood collection / urine vessels						tubes with screw cap					
---------------------	----------------------------------	--	--	--	--	--	----------------------	--	--	--	--	--



Carrier

boring Ø x L in mm	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	30.2 x 92	17.4 x 91	30.2 x 92	30.2 x 92
vessels per rotor	32	32	32	32	32	32	32	32	32	32	8	32	8	8
Cat. No.	1467	1467	1467	1467	1467	1467	1467	1467	1467	1467	1468	1467	1468	1468

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

ANGLE ROTOR, 6-PLACE | 1620A



Rotor

max. RPM max. RCF	6,000 min ⁻¹ 4,226
max. capacity	6 x 94 ml
run-up run-down, braked in sec	19 22
angle max. noise level	35° 53 dB (A)
Cat. No.	1620A



Vessels

capacity in ml	0.5	1.5	2.0	3	15	50	94	7.5 – 8.5	9 – 10	10	8.5 – 10	5	15	50	50
Ø x L in mm	10.7x36	11x38	11x38	10x60	17x100	34x100	38x102	15x92	16x92	15x102	16x100	17x59	17x120	29 x 115	29 x 115
max. RCF ²⁾	4,105	4,105	4,105	4,105	3,904	4,146	4,226	3,904	3,904	3,904	3,904	3,824	3,985	3,985	3,985
radius in mm	102	102	102	102	97	103	105	97	97	97	97	95	99	99	99
Cat. No.	Pediatric	microliter tubes	tubes ²⁾					blood collection / urine vessels				-	tubes with screw cap		



Adapter

boring Ø x L in mm	11.4 x 39	11.4 x 39	11.4 x 39	11.4 x 39	17.5 x 92	35 x 89	38.6 x 90.2	17.5 x 92	17.5 x 92	17.5 x 92	17.5 x 92	17 x 51	17 x 106	29.8 x 97	-
vessels per rotor	24	24	24	24	6	6	6	6	6	6	6	6	6	6	6
Cat. No.	1449	1449	1449	1449	1451	1463	-	1451	1451	1451	1451	1476	1466	1454	1646⁸⁾

Vessels

capacity in ml	10	30	50	85
Ø x L in mm	16 x 80	26 x 85	29 x 107	38 x 106
max. RCF ²⁾	3,904	3,824	4,025	4,226
radius in mm	97	95	100	105
Cat. No.	tubes with screw cap			



Adapter

boring Ø x L in mm	16.5 x 74	26 x 85	29 x 92	38.6 x 90.2
vessels per rotor	12	6	6	6
Cat. No.	1448	1447	1446	-


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.

8) Adapter (Set), 6-place: for conical 50 ml tubes with screw cap.

ANGLE ROTOR, 12-PLACE | 1613

Rotor

max. RPM max. RCF	6,000 min ⁻¹ 4,146
max. capacity	12 x 15 ml
run-up run-down, braked in sec	13 15
angle max. noise level	35° 55 dB (A)
Cat. No.	1613



Vessels

capacity in ml	0.5	4	5	6	15	1.1-1.4	2.6-3.4	2.7-3	4.5-5	4.9	7.5-8.5	9-10	10
Ø x L in mm	10.7 x 36	10 x 88	12 x 75	12 x 82	17 x 100	8 x 66	13 x 65	11 x 66	11 x 92	13 x 90	15 x 92	16 x 92	15 x 102
max. RCF ²⁾	2,777	3,502	3,300	3,300	4,146	3,300	3,300	3,300	4,146	4,146	4,146	4,146	4,146
radius in mm	69	87	82	82	103	82	82	82	103	103	103	103	103
Cat. No.	Pediatric	tubes²⁾				blood collection / urine vessels							



Adapter

boring Ø x L in mm	11x35	11.5x67.5	13.5x60	13.5x60	17.7x88	13.5x60	13.5x60	13.5x60	17.7x88	17.7x88	17.7x88	17.7x88	17.7x88
vessels per rotor	12	12	12	12	12	12	12	12	12	12	12	12	12
Cat. No.	2 x 1063-6 (6 pcs.)	6305	1054-A	1054-A	-	1054-A	1054-A	1054-A	-	-	-	-	-

Vessels

capacity in ml	1.6-5	4-7	8	8.5-10	5	15
Ø x L in mm	13 x 75	13 x 100	16 x 125	16 x 100	17 x 59	17 x 120
max. RCF ²⁾	3,300	4,146	4,146	4,146	3,180	4,146
radius in mm	82	103	103	103	79	103
Cat. No.	blood collection / urine vessels			-	-	-



Adapter

boring Ø x L in mm	13.5x60	13.5x79	17.7x88	17.7x88	17x25	17.7x88
vessels per rotor	12	12	6	12	12	6
Cat. No.	1054-A	1058	-	-	1064	-

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

ROTOFIX 32 A BLOOD TUBE PACKAGE 1*

	number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTOFIX 32 A centrifuge	1206	20	1.6 - 7	4,000	2,558
- 1 x swing-out rotor, 4-place	1624	16	4 - 10	4,000	2,522
- 4 x bucket	1481				
- 4 x lid (bioseal)	1492				
- 4 x adapter, 5-place	1383				
- 4 x adapter, 4-place	1348				
1206SET1					



UNIVERSAL 320 | 320 R

A universal choice

The UNIVERSAL 320 is a compact, versatile and indispensable general purpose centrifuge. Excellent performance and a comprehensive range of accessories enable the UNIVERSAL 320 to carry out virtually any centrifuging tasks including plates, blood tubes, cell culture, microliter and cytology. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (UNIVERSAL 320 R).

— FEATURES

- RPM: 500 - 16,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 24,900
- Max. capacity: 4 x 200 ml / 6 x 94 ml
- The universal choice among the benchtop centrifuges
- Choice of 18 rotors
- IVD-conform according to directive 98/79/EC
- Noise level of 48 dB(A) with angle rotor 1611
- Easy operation with keypad and control knob
- Impulse key for short cycle mode
- 9 program memories
- 9 individual acceleration and 10 deceleration stages
- Model 320 R coolable from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Small laboratories
- Hospitals
- Veterinary laboratories
- Cell Culture laboratories
- University / Academic research
- Pharmaceutical laboratories
- Food analyzing laboratories
- Physicians Office Lab (POL)



Centrifuge packages for the model can be found on [page 86](#)



More information about the control panel can be found on [page 198](#)

CYTO

Cyto system available for this model.
More information on [page 178](#)



according to directive 98/79/EC



UNIVERSAL 320



UNIVERSAL 320 R

TECHNICAL DATA

	UNIVERSAL 320 non-refrigerated	UNIVERSAL 320 R refrigerated
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~ 240 V 1 ~
frequency	50 – 60 Hz	50 – 60 Hz 60 Hz
consumption	400 VA	800 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	4 x 200 ml / 6 x 94 ml	4 x 200 ml / 6 x 94 ml
max. RPM	16,000 min ⁻¹	16,000 min ⁻¹
max. RCF	24,900	24,900
running time	1sec – 99 min: 59 sec, ∞ continuous run, short cycle mode (impulse button)	1sec – 99 min: 59 sec, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	401 x 529 x 346 mm	407 x 698 x 346 mm
weight	approx. 31 kg	approx. 52 kg
noise level	48 dB (A) with rotor 1611	50 dB (A) with rotor 1611
temperature control, infinitely variable	-	from -20 to +40 °C
Cat. No.	1401	1406
100 – 127 V 1 ~ / 50–60 Hz *)	1401-01	1406-01
consumption	400 VA	950 VA
emission, Immunity	FCC class B	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS	angle	max. RPM	max. capacity	Cat. No.	page
swing-out rotor, 4-places	90°	4,500 min ⁻¹	4x200 ml	1554	66
swing-out rotor, 4-places	90°	5,000 min ⁻¹	4x100 ml	1494	69
swing-out rotor, 4-places	90°	4,000 min ⁻¹	4x100 ml	1624	72
swing-out rotor, 4-places	90°	4,500 min ⁻¹	4x100 ml	1324	75
swing-out rotor, 8-places	90°	4,000 min ⁻¹	8x15 ml	1611	77
swing-out rotor, 12-places	55° / 60° / 80°	4,000 min ⁻¹	12x15 ml	1628	77
swing-out rotor, 8-places	45°	5,000 min ⁻¹	8x50 ml	1617	78
swing-out rotor, 6-places	90°	4,000 min ⁻¹	6x50 ml	1619	78
swing-out rotor, 2-places	90°	4,000 min ⁻¹	10 plates	1460	79
swing-out rotor, 24-places	90°	13,000 min ⁻¹	24x2 ml	1555	79
ANGLE ROTORS					
angle rotor, 24-places	50°	16,000 min ⁻¹	24x2 ml	1552	80
angle rotor, 30-places	45°	14,150 min ⁻¹	30x2 ml	1553	80
angle rotor, 64-places	45°	13,000 min ⁻¹	64x0.2 ml	1551	81
angle rotor, 18-places	45°	14,150 min ⁻¹	18 x 5 ml	1627	81
angle rotor, 6-places	35°	9,000 min ⁻¹	6x94 ml	1556	82
angle rotor, 12-places	35°	6,000 min ⁻¹	12x15 ml	1613	83
angle rotor, 12-places	35°	12,000 min ⁻¹	12x15 ml	1615	84
angle rotor, 8-places	45°	4,500 min ⁻¹	8x50 ml	1418	85



SWING-OUT ROTOR, 4-PLACE | 1554

	
Rotor	
max. RPM max. RCF	4,500 min ⁻¹ 3,328
max. capacity	4 x 200 ml
run-up run-down, braked in sec	28 31
angle max. noise level	90° 60 dB (A)
temperature in °C ¹⁾	-8
Cat. No.	1554

	
Bucket with clamp lock	
Lid bioseal ⁵⁾	1561
Cat. No.	1560
	
Bucket without clamp lock¹⁴⁾	
Cat. No.	1565



															 ^{3,2)}
Vessels															
capacity in ml	1.5	2.0	5	5	6	7	9	15	15	25	50	94	100	125	150
Ø x L in mm	11 x 38	11 x 38	17 x 59	12 x 75	12 x 82	12 x 100	14 x 100	17 x 100	18 x 102	24 x 100	34 x 100	38 x 102	44 x 100	51 x 100	51 x 116
max. RCF ²⁾	3,328	2,332	3,328	3,215	3,215	3,215	3,215	3,215	3,260	3,056	3,147	3,260	3,147	3,328	3,328
radius in mm	147	103	147	142	142	142	142	142	144	135	139	144	139	147	147
Cat. No.	microliter tubes			tubes ²⁾										-	-

															
Adapter															
boring Ø x L in mm	11.5 x 39	11.5 x 39	17x52	13.5x60	13.5x60	13.5x60	17.5x60	17.5x60	18.5x74	25.2x66	35.2x69	38.5x74	45.5 x 69	52x77	52x77
vessels per rotor	56	56	16	28	28	28	20	20	16	4	4	4	4	4	4
Cat. No.	1571	1571	1593	1589	1589	1589	1588	1588	1572	1573	1574	1575	1576	1594	1594

															
Vessels															
capacity in ml	200	1.1–1.4	2.6–3.4	4.9	2.7–3	4.5–5	4–5.5	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10	12
Ø x L in mm	56x112	8 x 66	13x65	13x90	11x66	11x92	15x75	15 x 92	16 x 92	15 x 102	13x75	13x100	16x75	16x100	17x102
max. RCF ²⁾	3,328	3,215	3,215	3,215	3,215	3,215	3,215	3,215	3,215	3,215	3,215	3,215	3,215	3,215	3,215
radius in mm	147	142	142	142	142	142	142	142	142	142	142	142	142	142	142
Cat. No.	0555	blood collection / urine vessels													

															
Adapter															
boring Ø x L in mm	57x77	13.5x60	13.5x60	13.5x60	13.5x60	13.5x60	17.5x60	17.5x60	17.5x60	17.5x60	13.5x60	13.5x60	17.5x60	17.5x60	17x74
vessels per rotor	4	28	28	28	28	28	20	20	20	20	28	28	20	20	12
Cat. No.	-	1589	1589	1589	1589	1589	1588	1588	1588	1588	1589	1589	1588	1588	1591

																
			3.2)													chrome bath tube
Vessels																
capacity in ml	11	15	15	30	50	12	25	30	50	10	30	50	85	94	30	
Ø x L in mm	16 x 110	17 x 120	17 x 120	25 x 110	29 x 115	17 x 100	25 x 90	15 x 110	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	38 x 102	44 x 105	
max. RCF ²⁾	3,260	3,328	3,328	3,328	3,328	3,260	3,328	3,328	3,328	3,215	3,260	3,260	3,260	3,260	3,192	
radius in mm	144	147	147	147	147	144	147	147	147	142	144	144	144	144	141	
Cat. No.	Nunc®	tubes with screw cap														0534 ⁶⁾

																															
Adapter																															
boring Ø x L in mm																17.5x74	17x77	17x77	26x77	30x77	17.5x74	26x65	26x65	30x77	16.5x60	26x74	29x74	38.5 x 74	38.5x74	45x71	
vessels per rotor																16	8	12	4	4	16	4	4	4	20	4	4	4	4	4	4
Cat. No.																1581	1577	1595	1578	1579	1581	1582	1582	1583	1584	1585	1586	1575	1575	1587	

SWING-OUT ROTOR, 4-PLACE | 1554

			
Rotor		Bucket	
max. RPM max. RCF	4,500 min ⁻¹ 3,328	Cat. No.	1559
max. capacity	4 x 50 ml		
run-up run-down, braked in sec	28 31		
angle max. noise level	90° 58 dB (A)		
temperature in °C ¹⁾	-8		
Cat. No.	1554		



Vessels																
	capacity in ml	5	6	7	8	9	15	2.6 – 3.4	2.7 – 3	4 – 5.5	4.5 – 5	4.9	9 – 10	10	1.6 – 5	4 – 7
	Ø x L in mm	12x75	12x82	12x100	16x125	14x100	17x100	13x65	11x66	15x75	11x92	13x90	16 x 92	10 x 102	13x75	13x100
	max. RCF ²⁾	3,192	3,192	3,192	3,328	3,260	3,260	3,192	3,192	3,124	3,192	3,192	3,260	3,260	3,192	3,192
	radius in mm	141	141	141	147	144	144	141	141	138	141	141	144	144	141	141
Cat. No.	tubes ²⁾						blood collection / urine vessels									

																
	Adapter															
	boring Ø x L in mm	13.4x57.5	13.4x57.5	13.4x57.5	16.4x82	17.5x81	17.5x81	13.4x57.5	13.4x57.5	17.5x81	13.4x57.5	13.4x57.5	17.5x81	17.5x81	13.4x57.5	13.4x57.5
	vessels per rotor	20	20	20	16	16	16	20	20	16	20	20	16	16	20	20
	Cat. No.	1486	1486	1486	1488	1482A	1482A	1486	1486	1482A	1486	1486	1482A	1482A	1486	1486

								
Vessels								
capacity in ml	4 – 7	8.5 – 10	8	12	15	50	12	50
Ø x L in mm	16x75	16x100	16x125	17x102	17x120	29 x 115	17x100	29x115
max. RCF ²⁾	3,124	3,260	3,328	3,147	3,351	3,305	3,260	3,305
radius in mm	138	144	147	139	148	146	144	146
Cat. No.	blood- / urine vessels				tubes with screw cap			

	+ 0715 + 0715							
								
Adapter								
boring Ø x L in mm	17.5x81	17.5x81	17.5x81	17.5x74	17x100	30x98	17.5x81	30x98
vessels per rotor	16	16	16	12	16	4	16	4
Cat. No.	1482A	1482A	1482A ⁴⁾	1487	1483A	1484	1482A	1484 ⁴⁾

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.2) When using these tubes, bucket 1560 cannot be closed with lid 1561.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.
- 14) With the E3922 add-on kit and the 1561 lid, the 1565 carrier can be converted at a later time to a 1560 carrier with single-hand clamp lock.

SWING-OUT ROTOR, 4-PLACE | 1554

			
Rotor		Bucket	
max. RPM max. RCF	4,500 min ⁻¹ 3,260	Cat. No.	1563
max. capacity	8 x 50 ml		
run-up run-down, braked in sec	28 31		
angle max. noise level	90° 58 dB (A)		
temperature in °C ¹⁾	-8		
Cat. No.	1554		



					
Vessels					
capacity in ml		12	15	50	50
Ø x L in mm		17 x 100	17 x 120	29 x 115	29 x 115
max. RCF ²⁾		3,260	3,260	3,260	3,260
radius in mm		144	144	144	144
Cat. No.		tubes with screw cap			
		+ E 2109 +E2110-A			
					
Adapter					
boring Ø x L in mm		17 x 87	17 x 87	30 x 87	30 x 87
vessels per rotor		8	8	8	8
Cat. No.		1592	1592	-	-


1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
 The max. RCF for glass tubes annotated with footnote 2) is 4,000.


SWING-OUT ROTOR, 4-PLACE | 1494


	
Rotor	
max. RPM max. RCF	5,000 min ⁻¹ 4,193
max. capacity	4 x 100 ml
run-up run-down, braked in sec	30 32
angle max. noise level	90° 56 dB (A)
temperature in °C ¹⁾	-10
Cat. No.	1494


	
Bucket	
Cat. No.	1425



	
Vessels	
capacity in ml	1.5 2.0 1 3 5 6 7 9 15 25 50 100 1-8
Ø x L in mm	11 x 38 11 x 38 6 x 45 10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 24 x 100 34 x 100 44 x 100 simple / multiple
max. RCF ²⁾	3,885 3,885 3,969 3,913 3,913 3,913 3,913 3,913 3,913 3,913 3,913 3,801 2,739
radius in mm	139 139 142 140 140 140 140 140 140 140 140 136 98
Cat. No.	microliter tubes Rhesus tubes ²⁾ cyto chambers

	
Adapter	
boring Ø x L in mm	11.5 x 38 11.5 x 38 6.5 x 34 10.5 x 40 13.4 x 50 12.7 x 60 12.7 x 60 17.5 x 84 17.5 x 84 25.5 x 84 35.5 x 84 45.5 x 86 -
vessels per rotor	36 36 144 56 28 48 48 28 28 8 4 4 4
Cat. No.	1444 1444 1432 1433 1438 1434 1434 1431 1431 1435 1436 1437 1452

	
Vessels	
capacity in ml	2.6-3.4 2.7-3 4-5.5 4.5-5 4.9 7.5-8.5 9-10 1.6-5 4-7 4-7 8.5-10 15 50 50
Ø x L in mm	13 x 65 11 x 66 15 x 75 11 x 92 13 x 90 15 x 92 16 x 92 13 x 75 13 x 100 16 x 75 16 x 100 17 x 120 29 x 115 19 x 115
max. RCF ²⁾	3,913 3,913 3,913 3,913 3,913 3,913 3,913 3,913 3,913 3,913 3,913 4,081 4,081 4,081
radius in mm	140 140 140 140 140 140 140 140 140 140 140 146 146 146
Cat. No.	blood collection / urine vessels tubes with screw cap

	
Adapter	
boring Ø x L in mm	13.4 x 50 13.4 x 50 16.5 x 50 13.4 x 50 13.4 x 50 16.5 x 50 17 x 45 13.4 x 50 13.4 x 50 16.5 x 50 16.5 x 50 17 x 90 30 x 90 30 x 90
vessels per rotor	28 28 28 28 28 28 16 28 28 28 28 4 4 4
Cat. No.	1438 1438 1441 1438 1438 1441 1439 1438 1438 1441 1441 1442 1443 1737

CYTO Cyto system available for this model.
More information on [page 178](#)

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 4-PLACE | 1494




Rotor

max. RPM max. RCF	5,000 min ⁻¹ 4,109
max. capacity	4 x 50 ml
run-up run-down, braked in sec	30 32
angle max. noise level	90° 54 dB (A)
temperature in °C ¹⁾	-10
Cat. No.	1494



Bucket

Lid	1421
Cat. No.	1427



Vessels

capacity in ml	1.5	2.0	1	3	5	6	7	9	15	25	50	1.1-1.4	2.6-3.4	2.7-3	4-5.5
Ø x L in mm	11 x 38	11 x 38	6 x 45	10 x 60	12 x 75	12 x 82	12 x 100	14 x 100	17 x 100	24 x 100	34 x 100	8 x 66	13 x 65	11 x 66	15 x 75
max. RCF ²⁾	4,109	4,109	4,081	4,053	4,025	4,053	3,941	3,941	3,941	3,941	3,941	4,109	4,025	4,053	4,109
radius in mm	147	147	146	145	144	145	141	141	141	141	141	147	144	145	147
Cat. No.	microliter tubes		Rhesus	tubes ²⁾								blood collection / urine vessels			



Adapter

boring Ø x L in mm	11.5 x 38	11.5 x 38	6.5 x 34	10.5 x 40	13.4 x 58	12.5 x 44	12.4 x 87	15 x 73	17.8 x 87	25.5 x 87	35.5 x 87	9 x 41	13.4 x 58	12.5 x 44	15.6 x 41
vessels per rotor	36	36	120	48	32	48	48	24	24	8	4	48	32	48	20
Cat. No.	5277	5277	1357	1327	1732	5229	5230	5237	5231	5232	5233	5278	1732	5229	5279

Vessels

capacity in ml	4.5-5	4.9	7.5-8.5	9-10	1.6-5	4-7	4-7	8.5-10	15	50	25	30	50
Ø x L in mm	11 x 92	13 x 90	15 x 92	16 x 92	13 x 75	13 x 100	16 x 75	16 x 100	17 x 120	29 x 115	25 x 90	25 x 110	29 x 115
max. RCF ²⁾	3,941	4,025	4,105	3,969	4,025	4,025	3,969	3,941	4,165	4,053	3,565	4,025	4,053
radius in mm	141	144	147	142	144	144	142	141	145	145	142	144	145
Cat. No.	blood collection / urine vessels								tubes with screw cap				



Adapter

boring Ø x L in mm	12.4 x 87	13.4 x 58	15.6 x 41	17 x 66	13.4 x 58	13.4 x 58	17 x 66	17.8 x 87	17 x 90	30 x 90	25.5 x 72	25.5 x 85	35.5 x 87
vessels per rotor	48	32	20	20	32	32	20	24	4	4	8	4	4
Cat. No.	5230	1732	5279	5271 ⁴⁾	1732	1732	5271 ⁴⁾	5231	5275	5276	1731	5272	5233 ⁴⁾

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

3.1) When using these tubes, carrier 1427 cannot be closed with lid 1421.

4) Please remove the spacer.

SWING-OUT ROTOR, 4-PLACE | 1494




Rotor

max. RPM max. RCF	5.000 min ⁻¹ 4.193
max. capacity	4 x 100 ml
run-up run-down, braked in sec	30 32
angle max. noise level	90° 58 dB (A)
temperature in °C ¹⁾	-10
Cat. No.	1494



Bucket

Lid bioseal ⁵⁾	1492
Cat. No.	1495



UNIVERSAL
320 | 320 R

Vessels

capacity in ml	0.5	1.5	2.0	1	3	5	6	7	9	15	25	50	94	100
Ø x L in mm	10.7x36	11x38	11x38	6 x 45	10 x 60	12x75	12x82	12x100	14x100	17x100	24x100	34x100	38x102	44x100
max. RCF ²⁾	3,745	3,857	3,857	4,081	4,137	4,025	4,025	4,025	3,997	3,997	3,829	3,801	4,109	4,025
radius in mm	134	138	138	146	148	144	144	144	143	143	137	136	147	144
Cat. No.	Pediatric	microliter tubes			Rhesus	tubes ²⁾								



Adapter

boring Ø x L in mm	11.2x38	11.2x38	11.2x38	6.5x34	10.5x40	13.4x48	13.4x48	13.4x48	17.6x91	17.6x91	25.2x87	35.2x87	38.5x92	45.6x98	Spacer
vessels per rotor	20	20	20	108	36	20	20	20	16	16	4	4	4	4	
Cat. No.	1351	1351	1351	1339	1343	1383	1383	1383	1329	1329	1330	1331	1396	0761	

Vessels

capacity in ml	1.1 – 1.4	2.7 – 5	2.7 – 5	2.6 – 4.9	2.6 – 4.9	4 – 8.5	4 – 8.5	9 – 10	10	1.6 – 5	1.6 – 5	4 – 10	4 – 10	
Ø x L in mm	8 x 66	11 x 66	11 x 92	13 x 65	13 x 90	15 x 75	15 x 92	16 x 92	15 x 102	13 x 75	13 x 100	16 x 75	16 x 100	
max. RCF ²⁾	4,053	4,025	4,025	4,025	4,025	4,053	4,053	3,997	4,193	4,025	4,025	4,025	4,025	
radius in mm	145	144	144	144	144	145	145	143	150	144	144	144	144	
Cat. No.	blood collection / urine vessels													



Adapter

boring Ø x L in mm	9x47	13.4x48	13.4x48	13.4x48	13.4x48	15.6x47	15.6x47	17.6x91	17.6x91	13.4x48	13.4x48	16.5x56	16.5x56	
vessels per rotor	28	20	20	20	20	16	16	16	16	20	20	16	16	
Cat. No.	1457	1383	1383	1383	1383	1459	1459	1329	1329 ⁴⁾	1383	1383	1348	1348	

Vessels

capacity in ml	15	30	50	12	25	50	10	30	50	85	30	
Ø x L in mm	17 x 120	25 x 110	29 x 115	17 x 100	25 x 90	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	44 x 105	
max. RCF ²⁾	4,193	4,193	4,193	4,193	3,689	4,193	4,025	3,857	4,137	4,109	3,997	
radius in mm	150	150	150	150	132	150	144	138	148	147	143	
Cat. No.	tubes with screw cap											0534 ⁴⁾



Adapter

boring Ø x L in mm	17x90	26x80	30x90	17x80	26x72	29.5x80	16.5x56	26x83	29x93	38.5x92	45.9x98	Spacer
vessels per rotor	4	4	4	4	4	4	16	4	4	4	4	
Cat. No.	1347	1365	1384	6311	1363	6318	1348	4417	4416	1396	0765	


- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 1495 cannot be closed with lid 1492.
- Please remove the spacer.
- Tested by the TÜV in conformity with DIN EN 61010. section 2 - 020.
- A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.

SWING-OUT ROTOR, 4-PLACE | 1624



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,665
max. capacity	4 x 50 ml
run-up run-down, braked in sec	20 25
angle	90°
Cat. No.	1624



Vessels

capacity in ml	5	5	6	7	9	9	15	15	20	25	45	50	1–8
Ø x L in mm	12x75	12x75	12x82	12x100	14x100	14x100	17x100	17x100	21x100	24x100	31x100	34x100	simple / multiple
max. RCF ²⁾	2,057	2,164	2,308	2,308	2,308	2,415	2,308	2,415	2,361	2,451	2,361	2,451	1,646
radius in mm	115	121	129	129	129	135	129	137	132	137	132	137	92
temperature in °C ¹⁾	-17	-17	-17	-17	-17	-15	-17	-15	-15	-15	-15	-15	-16
Cat. No.	tubes²⁾												cyto chambers



Carrier

boring Ø x L in mm	12.5x64.4	13.5x65	12.5x71.5	12.5x71.5	14.6x74	14.6x78	17.6x71.5	17.6x78	21.5x74	26x78	32x74	35x78	-
vessels per rotor	16	68	16	16	20	40	16	28	8	8	4	4	4
Cat. No.	1369-91	1372	1369-92	1369-92	1370	1741	1369	1742	1346	1745	1345	1746	1660

Vessels

capacity in ml	1.1–1.4	2.6–3.4	4.5–5	4.9	1.6–5	4–7	1.6–5	4–7	4–7	4–7	4–7	8.5–10	30
Ø x L in mm	8 x 66	13x65	15x75	13x90	13x75	16x75	13x75	16x75	13 x 100	13 x 100	13 x 100	16 x 100	26 x 95
max. RCF ²⁾	2,415	2,325	2,325	2,451	2,129	2,361	2,325	2,325	2,361	2,361	2,451	2,361	2,451
radius in mm	135	130	130	137	119	132	130	130	132	132	137	132	137
temperature in °C ¹⁾	-15	-15	-15	-15	-15	-15	-15	-15	-15	-15	-15	-17	-15
Cat. No.	blood collection / urine vessels												0545



Carrier

boring Ø x L in mm	14.6x78	17.6x78	17.6x78	14.6x78	14.6x78	17.6x71.5	17.6x78	17.6x78	17.6x71.5	14.6x74	13.5x78	17.6x71.5	26x78
vessels per rotor	40	28	28	40	40	16	28	28	16	20	28	16	8
Cat. No.	1741	1742	1742	1741	1741	1369⁴⁾	1742	1742	1369⁴⁾	1370⁴⁾	1739	1369⁴⁾	1745

CYTO


For more information about our Cyto accessory, see [page 178](#)

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Please remove spacer.
- Tested by the TÜV in conformity with DIN EN 61010. section 2 - 020.
- Packed in units of 10 pieces.
- This combination permits no Vacutainers made of glass.

— SWING-OUT ROTOR, 4-PLACE | 1624

			
Rotor		Bucket	
max. RPM max. RCF	4,000 min ⁻¹ 1,968	Cat. No.	1366
max. capacity	48 x 4 ml		
run-up run-down, braked in sec	22 25		
angle max. noise level	90° 48 dB (A)		
temperature in °C	-15		
Cat. No.	1624		




	
Vessels	
capacity in ml	1.5 2.0 1 3 4
Ø x L in mm	11 x 38 11 x 38 6 x 45 10 x 60 12 x 60
max. RCF ²⁾	1,968 1,968 1,950 1,932 1,932
radius in mm	110 110 109 108 108
Cat. No.	microliter tubes Rhesus tubes ²⁾


	
Adapter	
boring Ø x L in mm	11.5 x 38 11.5 x 38 6.5 x 23 10.5 x 23 12.5 x 44
vessels per rotor	36 36 120 48 48
Cat. No.	5277 5277 1357 1327 1326

— SWING-OUT ROTOR, 4-PLACE | 1624

			
Rotor		Bucket	
max. RPM max. RCF ²⁾	4,000 min ⁻¹ 2,665	Lid bioseal⁵⁾	1492
max. capacity	4 x 100 ml	Cat. No.	1481
run-up run-down, braked in sec	20 25		
angle max. noise level	90° 58 dB (A)		
temperature in °C	-15		
Cat. No.	1624		




	
Vessels	
capacity in ml	0.5 1.5 2.0 1 3 5 6 7 9 15 25 50 94 100
Ø x L in mm	10.7 x 36 11 x 38 11 x 38 6 x 45 10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 24 x 100 34 x 100 38 x 102 44 x 100
max. RCF ²⁾	2,379 2,451 2,451 2,594 2,630 2,558 2,558 2,558 2,540 2,540 2,433 2,415 2,612 2,558
radius in mm	133 137 137 145 147 143 143 143 142 142 136 135 146 143
Cat. No.	Pediatric microliter tubes Rhesus tubes ²⁾


		Spacer
Adapter		
boring Ø x L in mm	11.2 x 38 11.2 x 38 11.2 x 38 6.5 x 34 10.5 x 43 13.4 x 48 13.4 x 48 13.4 x 48 17.6 x 91 17.6 x 91 25.2 x 87 35.2 x 87 38.5 x 92 45.9 x 98	
vessels per rotor	20 20 20 108 36 20 20 20 16 16 4 4 4 4	
Cat. No.	1351 1351 1351 1339 1343 1383 1383 1383 1329 1329 1330 1331 1396 0761	

SWING-OUT ROTOR, 4-PLACE | 1624


	
Rotor	
max. RPM max. RCF	4,000 min ⁻¹ 2,665
max. capacity	4 x 100 ml
run-up run-down, braked in sec	20 25
angle max. noise level	90° 58 dB (A)
temperature in °C	-15
Cat. No.	1624

	
Bucket	
Lid bioseal ⁵⁾	1492
Cat. No.	1481



												
Vessels												
capacity in ml	1.1–1.4	2.7–5	2.7–5	2.6–4.9	2.6–4.9	4–8.5	4–8.5	9–10	10	1.6–7	1.6–7	4–10
Ø x L in mm	8 x 66	11 x 66	11 x 92	13 x 65	13 x 90	15 x 75	15 x 92	16 x 92	15 x 102	13 x 75	13 x 100	16 x 75
max. RCF ²⁾	2,576	2,558	2,558	2,558	2,558	2,576	2,576	2,540	2,665	2,558	2,558	2,522
radius in mm	144	143	143	143	143	144	144	142	149	143	143	141
Cat. No.	blood collection / urine vessels											

												
Adapter												
boring Ø x L in mm	9 x 47	13.4 x 48	13.4 x 48	13.4 x 48	13.4 x 48	15.6 x 47	15.6 x 47	17.6 x 91	17.6 x 91	13.4 x 48	13.4 x 48	16.5 x 56
vessels per rotor	28	20	20	20	20	16	16	16	16	20	20	16
Cat. No.	1457	1383	1383	1383	1383	1459	1459	1329	1329⁴⁾	1383	1383	1348

											
Vessels											
capacity in ml	5	15	50	12	25	30	50	10	30	50	85
Ø x L in mm	17 x 59	17 x 120	29 x 115	17 x 100	25 x 90	25 x 110	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106
max. RCF ²⁾	2,665	2,665	2,665	2,665	2,343	2,665	2,665	2,522	2,451	2,630	2,612
radius in mm	149	149	149	149	131	149	149	141	137	147	146
Cat. No.	-	tubes with screw cap									0534⁶⁾

										
Adapter										
boring Ø x L in mm	17 x 45	17 x 90	30 x 90	17 x 80	26 x 72	26 x 80	29.5 x 80	16.5 x 56	26 x 83	29 x 93
vessels per rotor	12	4	4	4	4	4	4	16	4	4
Cat. No.	6341	1347	1384	6311	1363	1365	6318	1348	4417	4416

chrome bath tube

Spacer

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.) When using these tubes, bucket 1752 or 5051 cannot be closed with lid 1751 or 5053.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.

SWING-OUT ROTOR, 4-PLACE | 1324



Rotor

max. RPM max. RCF	4,500 min ⁻¹ 3,328
max. capacity	4 x 100 ml
run-up run-down, braked in sec	27 30
angle max. noise level	90° 58 dB (A)
temperature in °C	-6
Cat. No.	1324

Bucket

Lid bioseal ⁵⁾	1492
Cat. No.	1490



Vessels

capacity in ml	0.5	1.5	2.0	1	3	4	5	6	7	9	15	25	50	94	100
Ø x L in mm	10.7x36	11x38	11x38	6x45	10x60	10x88	12x75	12x82	12x100	14x100	17x100	24x100	34x100	38x102	44x100
max. RCF ²⁾	2,966	3,056	3,056	3,237	3,283	3,283	3,192	3,192	3,192	3,170	3,170	3,034	3,011	3,260	3,192
radius in mm	131	135	135	143	145	145	141	141	141	140	140	134	133	144	141
Cat. No.	Pediatric	microliter tubes			Rhesus	tubes²⁾									



Adapter

boring Ø x L in mm	11.2x38	11.2x38	11.2x38	6.5x34	10.5x43	10.5x43	13.4x48	13.4x48	13.4x48	17.6x91	17.6x91	25.2x87	35.2x87	38.5x92	45.9x100.5
vessels per rotor	20	20	20	108	36	36	20	20	20	16	16	4	4	4	4
Cat. No.	1351	1351	1351	1339	1343	1343	1383	1383	1383	1329	1329	1330	1331	1396	0761

Vessels

capacity in ml	1.1–1.4	2.6–3.4	4.9	2.7–3	4.5–5	4–5.5	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10	5	15
Ø x L in mm	8 x 66	13x65	13x90	11x66	11x92	15x75	15x92	16x92	15x102	13x75	13x100	16x75	16x100	17x59	17x120
max. RCF ²⁾	3,215	3,192	3,192	3,192	3,192	3,215	3,215	3,170	3,328	3,192	3,192	3,147	3,147	3,328	3,328
radius in mm	142	141	141	141	141	142	142	140	147	141	141	139	139	147	147
Cat. No.	blood collection / urine vessels													-	-



Adapter

boring Ø x L in mm	9x47	13.4x48	13.4x48	13.4x48	13.4x48	15.6x47	15.6x47	17.6x91	17.6x91	13.4x48	13.4x48	16.5x56	16.5x56	17x45	17x90
vessels per rotor	28	20	20	20	20	16	16	16	16	20	20	16	16	12	4
Cat. No.	1457	1383	1383	1383	1383	1459	1459	1329	1329⁴⁾	1383	1383	1348	1348	6341	1347

Vessels

Kapazität in ml	15	30	50	12	25	30	50	10	30	50	85	30
Ø x L in mm	17x120	25 x 110	29 x 115	17 x 100	25 x 90	25 x 110	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	44 x 105
max. RCF ²⁾	3,328	3,328	3,328	3,328	2,920	3,328	3,328	3,147	3,056	3,283	3,260	3,170
radius in mm	147	147	147	147	129	147	147	139	135	145	144	140
Cat. No.	tubes with screw cap											- ⁶⁾



Adapter

boring Ø x L in mm	17 x 107	26x80	30x90	17x80	26x72	26x80	29.5x80	16.5x56	26x83	29x93	38.5x92	45.9x100.5
vessels per rotor	12	4	4	4	4	4	4	16	4	4	4	4
Cat. No.	1356	1365	1384	6311	1363	1365	6318	1348	4417	4416	1396	0765

SWING-OUT ROTOR, 4-PLACE | 1324

	
Rotor	
max. RPM max. RCF	4,500 min ¹ 3,305
max. capacity	4 x 50 ml
run-up run-down, braked in sec	27 30
angle max. noise level	90° 54 dB (A)
temperature in °C	-6
Cat. No.	1324

	
Bucket	
Cat. No.	1398



Vessels															
capacity in ml	5	6	7	9	12	15	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	9–10	10	1.6–5	4–7
Ø x L in mm	12x75	12x82	12x100	14x100	17x102	17x100	13x65	11x66	15x75	11x92	13x90	16x92	15x102	13x75	13x100
max. RCF ²⁾	3,147	3,147	3,147	3,192	3,102	3,192	3,147	3,147	2,875	3,147	3,147	3,192	3,192	3,147	3,147
radius in mm	139	139	139	141	137	141	139	139	127	139	139	141	141	139	139
Cat. No.	Tubes²⁾						blood collection / urine vessels								

															
Adapter															
boring Ø x L in mm	13.4x57.5	13.4x57.5	13.4x57.5	17.5x81	17.5x74	17.5x81	13.4x57.5	13.4x57.5	17.5x81	13.4x57.5	13.4x57.5	17.5x81	17.5x81	13.4x57.5	13.4x57.5
vessels per rotor	20	20	20	16	12	16	20	20	16	20	20	16	16	20	20
Cat. No.	1486	1486	1486	1482A	1487	1482A	1486	1486	1482A	1486	1486	1482A	1482A	1486	1486

Vessels						
capacity in ml	4–7	8.5–10	15	50	12	50
Ø x L in mm	16x75	16x100	17 x 120	29 x 115	17 x 100	29 x 115
max. RCF ²⁾	3,034	3,034	3,305	3,260	3,192	3,260
radius in mm	134	134	146	144	141	144
Cat. No.	blood collection / urine vessels		tubes with screw cap			

		+ 0716		+ 0716		white vessels	
							
Adapter							
boring Ø x L in mm		17.5x81	17.5x81	17x100	30x98	17.5x81	30x98
vessels per rotor		16	16	16	4	16	4
Cat. No.		1482A	1482A	1483A	1484	1482A	1484⁴⁾

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

4) Please remove spacer.

— SWING-OUT ROTOR, 8-PLACE | 1611



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,415
max. capacity	8 x 15 ml
run-up run-down, braked in sec	20 20
angle max. noise level	90° 48 dB (A)
temperature in °C ¹⁾	-16
Cat. No.	1611



Vessels

capacity in ml	5	6	7	10	15	2.6 – 3.4	2.7 – 3	4 – 5.5	4.5 – 5	7.5 – 8.5	1.6 – 5	4 – 7	4 – 7	8.5 – 10
Ø x L in mm	12 x 75	12 x 82	12 x 100	13 x 100	17 x 100	13 x 65	11 x 66	15 x 75	11 x 92	15 x 92	13 x 75	13 x 100	16 x 75	16 x 100
max. RCF ²⁾	1,914	1,914	2,415	2,415	2,415	1,914	1,914	1,914	2,415	2,415	1,914	2,415	1,914	2,415
radius in mm	107	107	135	135	135	107	107	107	135	135	107	135	107	135
Cat. No.	tubes ²⁾					blood collection / urine vessels								



Bucket

boring Ø x L in mm	13 x 53	13 x 53	13.2 x 81	13.2 x 81	17.5 x 81	13 x 53	13 x 53	17.5 x 53	13.2 x 81	17.5 x 81	13 x 53	13.2 x 81	17.5 x 53	17.5 x 81
vessels per rotor	8	8	8	8	8	8	8	8	8	8	8	8	8	8
Cat. No.	1131-A	1131-A	1643	1643	1644	1131-A	1131-A	1132-A	1643	1644	1131-A	1643	1132-A	1644

— SWING-OUT ROTOR, 12-PLACE | 1628



Rotor

max. RPM max. RCF ²⁾	5,000 min ⁻¹ 4,193
max. capacity	12 x 15 ml
run-up run-down, braked in sec	16 16
angle max. noise level	55° / 60° / 80° 54 dB (A)
Cat. No.	1628



Vessels

capacity in ml	5	15	2.6 – 3.4	2.7 – 3	4 – 5.5	7.5 – 8.5	1.6 – 5	4 – 7	8.5 – 10
Ø x L in mm	12 x 75	17 x 100	13 x 65	11 x 66	15 x 75	15 x 92	13 x 75	16 x 75	16 x 100
max. RCF ²⁾	3,494	4,193	3,494	3,494	3,522	4,193	3,494	3,522	4,193
radius in mm	125	150	125	125	126	150	125	126	150
temperature in °C ¹⁾	-15	-10	-15	-15	-15	-10	-15	-15	-10
Cat. No.	tubes ²⁾		blood collection / urine vessels						



Bucket

boring Ø x L in mm	13.2 x 53	17.5 x 79	13.2 x 53	13.2 x 53	17.5 x 53	17.5 x 79	13.2 x 53	17.5 x 53	17.5 x 79
vessels per rotor	12	12	12	12	12	12	12	12	12
Cat. No.	1127-A	1621	1127-A	1127-A	1122	1621	1127-A	1122	1621

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— SWING-OUT ROTOR, 8-PLACE | 1617



Rotor

max. RPM max. RCF	5,000 min ⁻¹ 3,857
max. capacity	8 x 50 ml
run-up run-down, braked in sec	20 19
angle max. noise level	45° 50 dB (A)
temperature in °C ¹⁾	-10

Cat. No. 1617



Vessels

capacity in ml	15	50
Ø x L in mm	17 x 120	29 x 115
max. RCF ²⁾	3,857	3,857
radius in mm	138	138

Cat. No. tubes with screw cap



Adapter

boring Ø x L in mm	17 x 84	30 x 94.5
vessels per rotor	8	8

Cat. No. 1462-A -

— SWING-OUT ROTOR, 6-PLACE | 1619



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,701
max. capacity	6 x 50 ml
run-up run-down, braked in sec	20 22
angle max. noise level	90° 50 dB (A)
temperature in °C ¹⁾	-15

Cat. No. 1619



Vessels

capacity in ml	15	50
Ø x L in mm	17 x 120	29 x 115
max. RCF ²⁾	2,701	2,701
radius in mm	151	151

Cat. No. tubes with screw cap




Adapter

boring Ø x L in mm	17 x 84	30 x 87.5
vessels per rotor	6	6

Cat. No. 1462-A -

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— SWING-OUT ROTOR, 2-PLACE | 1460



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,218
max. capacity	10 plates
run-up run-down, braked in sec	40 45
angle max. noise level	90° 55 dB (A)
temperature in °C ¹⁾	-6
Cat. No.	1460



Vessels

capacity in ml	-	-	-	-	-	-	-	-	0,2
W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	84x59x11	124x82x20	-
max. RCF ²⁾	2,218	2,218	2,218	2,218	2,218	2,218	2,218	2,218	2,218
radius in mm	124	124	124	124	124	124	124	124	124
Cat. No.	MTP	MTP	CP	DWP	MS	QP	Microtest plates	PCR plate, 96 wells	PCR strips



Bucket

boring Ø x L in mm	-	-	-	-	-	-	-	-	-
vessels per rotor	10	8	6	2	2	2	4	2	24 x 8
Cat. No.	1453-A	1453-A	1453-A	1453-A	1453-A	1453-A	1453-A	1453-A + 1485	1453-A + 1485

— SWING-OUT ROTOR, 24-PLACE | 1555



Rotor

max. RPM max. RCF	13,000 min ⁻¹ 18,327
max. capacity	24x2 ml
run-up run-down, braked in sec	36 31
angle	90°
temperature in °C ¹⁾	3
Cat. No.	1555

Lid bioseal[®],
phenol-resistant

Cat. No.



INCLUSIVE



Vessels

capacity in ml	0.2	0.4	0.5	0.8	1.5	2
Ø x L in mm	6x18	6x45	8x30	8x45	11x38	11x38
max. RCF ²⁾	18,327	18,327	18,327	18,327	18,327	18,327
radius in mm	97	97	97	97	97	97
Cat. No.	microliter tubes					



Adapter

boring Ø x L in mm	6x40	6x40	8x40	8x40	10.2x19.3	11.5x38.5
vessels per rotor	24	24	24	24	24	24
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 24-PLACE | 1552

			+	Lid bioseal [®] , phenol-resistant	
Rotor				Cat. No.	INCLUSIVE
max. RPM max. RCF	16,000 min ⁻¹ 24,900				
max. capacity	24 x 2 ml				
run-up run-down, braked in sec	30 29				
angle max. noise level	50° 58 dB (A)				
temperature in °C ¹⁾	2				
Cat. No.	1552				



								
Vessels								
capacity in ml	0.2	0.4	0.5	0.8	1.5	2	0.5	
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36	
max. RCF ²⁾	24,900	24,900	24,900	24,900	24,900	24,900	23,755	
radius in mm	87	87	87	87	87	87	83	
Cat. No.	microliter tubes						Pediatric	

								
Adapter								
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	10.2 x 19.3	11.2 x 42.6	11.2 x 39	
vessels per rotor	24	24	24	24	24	24	12	
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788¹⁷⁾	

— ANGLE ROTOR, 30-PLACE | 1553

			+	Lid bioseal [®] , phenol-resistant	
Rotor				Cat. No.	INCLUSIVE
max. RPM max. RCF	14,150 min ⁻¹ 21,713				
max. capacity	30 x 2 ml				
run-up run-down, braked in sec	35 32				
angle	45°				
temperature in °C ¹⁾	-1				
Cat. No.	1553				



								
Vessels								
capacity in ml	0.2	0.4	0.5	0.8	1.5	2	0.5	
Ø x L in mm	6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36	
max. RCF ²⁾	21,713	21,713	21,713	21,713	21,713	21,713	20,818	
radius in mm	97	97	97	97	97	97	93	
Cat. No.	microliter tubes						Pediatric	

								
Adapter								
boring Ø x L in mm	6 x 40	6 x 40	8 x 40	8 x 40	10.2 x 19.3	11.2 x 40.9	11.2 x 39	
vessels per rotor	30	30	30	30	30	30	15	
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788¹⁷⁾	

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.
- 17) Packed in units of 15 pieces.

— ANGLE ROTOR, 8-PLACE | 1551

	
Rotor	
max. RPM max. RCF	13,000 min ⁻¹ 13,604
max. capacity	8 x PCR-Strips
run-up run-down, braked in sec	36 31
angle max. noise level	45° 58 dB (A)
temperature in °C ¹⁾	-4
Cat. No.	1551



Lid bioseal⁵⁾,
phenol-resistant
Cat. No.



INCLUSIVE




	
Vessels	
capacity in ml	0.2 0.2
Ø x L in mm	6 x 18 -
max. RCF ²⁾	13,604 13,604
radius in mm	72 72
Cat. No.	- PCR-Strips

— ANGLE ROTOR, 18-PLACE | 1627

	
Rotor	
max. RPM max. RCF	14,150 min ⁻¹ 22,161
max. capacity	18 x 5 ml
run-up run-down, braked in sec	35 32
angle	45°
temperature in °C ¹⁾	2
Cat. No.	1627



Lid bioseal⁵⁾,
phenol-resistant
Cat. No.



INCLUSIVE



	
Vessels	
capacity in ml	5
Ø x L in mm	17 x 59
max. RCF ²⁾	22,161
radius in mm	99
Cat. No.	-

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.

— ANGLE ROTOR, 6-PLACE | 1556

Rotor	
max. RPM max. RCF	9.000 min ⁻¹ 10.595
max. capacity	6 x 94 ml
run-up run-down, braked in sec	36 32
angle max. noise level	35° 60 dB (A)
temperature in °C ¹⁾	0
Cat. No.	1556

+	Lid bioseal[®], phenol-resistant	
	Cat. No.	INCLUSIVE



															
Vessels															
capacity in ml	1.5	2	15	50	50	85	7.5–8.5	9–10	10	8.5–10	15	50	10	30	50
Ø x L in mm	11x38	11x38	17x100	35x105	34x100	38x101	15x92	16x92	15x102	16x100	17x120	29x115	16x80	26x95	29x107
max. RCF ²⁾	10,324	10,324	10,052	10,414	10,414	10,595	10,052	10,052	10,052	10,052	10,052	10,052	10,414	9,690	10,142
radius in mm	114	114	111	115	115	117	111	111	111	111	111	111	115	107	112
Cat. No.	microliter tubes		tubes ³⁾			blood collection / urine vessels					tubes with screw cap				
															
Adapter															
boring Ø x L in mm	11.4 x 39	11.4 x 39	17.5 x 78	35 x 89	35 x 89	-	17.5 x 78	17.5 x 78	17.5 x 78	17.5 x 78	17x106	29.8 x 97	16.5 x 72	26 x 85	29 x 92
vessels per rotor	24	24	6	6	6	6	6	6	6	6	6	6	12	6	6
Cat. No.	1449	1449	1478	1463	1463	-	1478	1478	1478	1478	1466	1454	1477	1447	1446

Vessels		
capacity in ml	85	94
Ø x L in mm	38 x 106	38 x 102
max. RCF ²⁾	10,595	10,595
radius in mm	117	117
Cat. No.	tubes with screw cap	

+		
Adapter		
boring Ø x L in mm	-	-
vessels per rotor	6	6
Cat. No.	-	-

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.

ANGLE ROTOR, 12-PLACE | 1613



Rotor

max. RPM max. RCF	6,000 min ⁻¹ 4,146
max. capacity	12 x 15 ml
run-up run-down, braked in sec	15 15
angle max. noise level	35° 50 dB (A)
temperature in °C ¹⁾	-16
Cat. No.	1613



Vessels

capacity in ml	0.5	1.5	2.0	4	5	6	15	1.1 – 1.4	2.6 – 3.4	2.7 – 3	4.5 – 5	4.9	7.5 – 8.5	9 – 10	10
Ø x L in mm	10.7 x 36	11 x 38	11 x 38	10 x 88	12 x 75	12 x 82	17 x 100	8 x 66	13 x 65	11 x 66	11 x 92	13 x 90	15 x 92	16 x 92	15 x 102
max. RCF ²⁾	2,777	2,737	2,737	3,502	3,300	3,300	4,146	3,300	3,300	3,300	4,146	4,146	4,146	4,146	4,146
radius in mm	69	68	68	87	82	82	103	82	82	82	103	103	103	103	103
Cat. No.	Pediatric	microliter tubes		tubes ²⁾				blood collection / urine vessels							



Adapter

boring Ø x L in mm	11 x 35	11 x 35	11 x 35	11.5 x 67.5	13.5 x 60	13.5 x 60	17.7 x 88	13.5 x 60	13.5 x 60	13.5 x 60	17.7 x 88	17.7 x 88	17.7 x 88	17.7 x 88	17.7 x 88
vessels per rotor	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
Cat. No.	2 x 1063-6 (6 pcs.)			6305	1054-A	1054-A	-	1054-A	1054-A	1054-A	-	-	-	-	-

Vessels

capacity in ml	1.6 – 5	4 – 7	8	8.5 – 10	5	15
Ø x L in mm	13 x 75	13 x 100	16 x 125	16 x 100	17 x 59	17 x 120
max. RCF ²⁾	3,300	4,146	4,146	4,146	3,180	4,146
radius in mm	82	103	103	103	79	103
Cat. No.	blood collection / urine vessels			-	-	-




Adapter

boring Ø x L in mm	13.5 x 60	13.5 x 79	17.7 x 88	17.7 x 88	17 x 25	17.7 x 88
vessels per rotor	12	12	6	12	12	6
Cat. No.	1054-A	1058	-	-	1064	-

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 12-PLACE | 1615



Rotor

max. RPM max. RCF	12,000 min ⁻¹ 16,582
max. capacity	12 x 15 ml
run-up run-down, braked in sec	40 40
angle max. noise level	35° 52 dB (A)
temperature in °C ¹⁾	-2
Cat. No.	1615



Vessels

capacity in ml	0.5	1.5	2.0	4	5	6	15	1.1 - 1.4	2.6 - 3.4	2.7 - 3	4.5 - 5	4.9	7.5 - 10	10
Ø x L in mm	10.7 x 36	11 x 38	11 x 38	10 x 88	12 x 75	12 x 82	17 x 100	8 x 66	13 x 65	11 x 66	11 x 92	13 x 90	15/16 x 92	15 x 102
max. RCF ²⁾	11,108	10,947	10,947	14,006	13,201	13,201	16,582	13,201	13,201	13,201	16,582	16,582	16,582	16,582
radius in mm	69	68	68	87	82	82	103	82	82	82	103	103	103	103
Cat. No.	Pediatric	microliter tubes		tubes ²⁾				blood collection / urine vessels						



Adapter

boring Ø x L in mm	11 x 35	11 x 35	11 x 35	11.5 x 67.5	13.5 x 60	13.5 x 60	17.7 x 88	13.5 x 60	13.5 x 60	13.5 x 60	17.7 x 88	17.7 x 88	17.7 x 88	17.7 x 88
vessels per rotor	12	12	12	12	12	12	12	12	12	12	12	12	12	12
Cat. No.	2 x 1063-6 (6 pcs.)			6305	1054-A	1054-A	-	1054-A	1054-A	1054-A	-	-	-	-

Vessels

capacity in ml	1.6 - 5	4 - 7	8 - 10	8 - 10	5	15
Ø x L in mm	13 x 75	13 x 100	16 x 100	16 x 125	17 x 59	17 x 120
max. RCF ²⁾	13,201	16,582	16,582	16,582	12,718	15,455
radius in mm	82	103	103	103	79	96
Cat. No.	blood collection / urine vessels			-	-	-



Adapter

boring Ø x L in mm	13.5 x 60	13.5 x 79	17.7 x 88	17.7 x 88	17 x 25	17 x 104
vessels per rotor	12	12	12	6	12	6
Cat. No.	1054-A	1058	-	-	1064	1647 ²⁵⁾

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

25) Adapter (set), 6-place: For conical 15 ml tubes with screw cap, remove carriers from rotor and replace them with adapters.

— ANGLE ROTOR, 8-PLACE | 1418

Rotor



max. RPM max. RCF	4,500 min ⁻¹ 3,305
max. capacity	8 x 50 ml
run-up run-down, braked in sec	30 31
angle max. noise level	45° 54 dB (A)
temperature in °C ¹⁾	-11
Cat. No.	1418



Vessels

capacity in ml	5	15	1.1-1.4	2.6-3.4	2.7-3	9-10	1.6-5	4-7	8.5-10	12	15	50	12	50	50
Ø x L in mm	12 x 75	17 x 100	8 x 66	13 x 65	11 x 66	16 x 92	13 x 75	13 x 100	16 x 100	17 x 102	17 x 120	29 x 115	17 x 100	29 x 115	29 x 107
max. RCF ²⁾	2,762	3,215	2,762	2,762	2,762	3,215	2,762	3,305	3,215	3,215	3,283	3,147	3,215	3,147	3,147
radius in mm	122	142	122	122	122	142	122	146	142	142	145	139	142	139	139
Cat. No.	tubes ²⁾	blood collection / urine vessels								tubes with screw cap					



Carrier

boring Ø x L in mm	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	17.4 x 91	30.2 x 92	17.4 x 91	30.2 x 92	30.2 x 92
vessels per rotor	32	32	32	32	32	32	32	32	32	32	32	8	32	8	8
Cat. No.	1467	1467	1467	1467	1467	1467	1467	1467	1467	1467	1467	1468	1467	1468	1468

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

UNIVERSAL 320 BLOOD TUBE PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 centrifuge	1401	28	1.6 - 7	13 x 75 / 100	5,000	3,913
- 1 x swing-out rotor, 4-place	1494	28	4 - 10	16 x 75 / 100	5,000	3,913
- 4 x bucket	1425					
- 4 x adapter, 7-place	1438					
- 4 x adapter, 7-place	1441					
1401SET1						



UNIVERSAL 320 BLOOD TUBE PACKAGE 2

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 centrifuge	1401	28	1.6 - 7	13 x 75 / 100	4,500	3,328
- 1 x swing-out rotor, 4-place	1554	28	4 - 10	16 x 75 / 100	4,500	3,328
- 4 x bucket	1560					
- 4 x lid (bioseal)	1561					
- 4 x adapter, 7-place	1589					
- 4 x adapter, 5-place	1588					
1401SET2						



UNIVERSAL 320 CONICAL PACKAGE 3

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 centrifuge	1401	16	15	17 x 120	4,500	3,305
- 1 x swing-out rotor, 4-place	1324	4	50	29 x 115	4,500	3,260
- 4 x bucket	1398					
- 4 x adapter, 4-place (conical)	1483A					
- 4 x adapter, 1-place (conical)	1484					
1401SET3						



UNIVERSAL 320 R CONICAL PACKAGE 1

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 R centrifuge	1406	16	15	17 x 120	4,500	3,305
- 1 x swing-out rotor, 4-place	1554	4	50	29 x 115	4,500	3,260
- 4 x bucket	1560					
- 4 x lid (bioseal)	1561					
- 4 x adapter, 2-place (conical)	1577					
- 4 x adapter, 1-place (conical)	1579					
1406SET1						



UNIVERSAL 320 R BLOOD TUBE PACKAGE 2

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 R centrifuge	1406	28	1.6 - 7	13 x 75 / 100	5,000	3,913
- 1 x swing-out rotor, 4-place	1494	28	4 - 10	16 x 75 / 100	5,000	3,913
- 4 x bucket	1425					
- 4 x adapter, 7-place	1438					
- 4 x adapter, 7-place	1441					
1406SET2						



UNIVERSAL 320 R CONICAL PACKAGE 3

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 R centrifuge	1406	16	15	17 x 120	4,500	3,305
- 1 x swing-out rotor, 4-place	1324	4	50	29 x 115	4,500	3,260
- 4 x bucket	1398					
- 4 x adapter, 4-place (conical)	1483A					
- 4 x adapter, 1-place (conical)	1484					
1406SET3						



UNIVERSAL 320 R BLOOD TUBE PACKAGE 4

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 R centrifuge	1406	28	1.6 - 7	13 x 75 / 100	4,000	2,558
- 1 x swing-out rotor, 4-place	1624	28	4 - 10	16 x 75 / 100	4,000	2,665
- 4 x bucket	1481					
- 4 x lid (bioseal)	1492					
- 4 x adapter, 5-place	1383					
- 4 x adapter, 4-place	1348					
1406SET4						



UNIVERSAL 320 R BLOOD TUBE PACKAGE 5

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 R centrifuge	1406	28	1.6 - 7	13 x 75 / 100	5,000	3,913
- 1 x swing-out rotor, 4-place	1554	28	4 - 10	16 x 75 / 100	5,000	3,913
- 4 x bucket	1560					
- 4 x lid (biobio)	1561					
- 4 x adapter, 7-place	1589					
- 4 x adapter, 5-place	1588					
1406SET5						



UNIVERSAL 320 R BLOOD TUBE PACKAGE 6

		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x UNIVERSAL 320 R centrifuge	1406	28	1.6 - 7	13 x 75 / 100	5,000	3,913
- 1 x swing-out rotor, 4-place	1494	28	4 - 10	16 x 75 / 100	5,000	3,913
- 4 x bucket	1427					
- 4 x lid (bioseal)	1421					
- 4 x adapter, 8-place	1732					
- 4 x adapter, 6-place	5231					
1406SET6						



ROTINA 380 | 380 R

High speed with space saving design

High performance unit supporting a wide array of accessories for multiple applications in just one rotor. Its size and performance make it the ideal benchtop centrifuge for most clinical, research and industrial laboratories. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (ROTINA 380 R).

— FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 24,400 – adjustable in increments of 1
- Max. capacity: 4 x 290 ml
- Choice of 8 rotors
- IVD-conform according to directive 98/79/EC
- Max. noise level of 54 dB(A) with rotor 1760
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- 9 individual acceleration and 10 deceleration stages
- Model 380 R coolable from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Hematological laboratories
- Small blood centers
- Veterinary laboratories
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Forensic laboratories
- Paternity testing laboratories
- Environmental testing laboratories
- Cell culture laboratories



Centrifuge packages for the model can be found on [page 99](#)



More information about the control panel can be found on [page 198](#)

CYTO

Cyto system available for this model.
More information on [page 178](#)



according to directive 98/79/EC



ROTINA 380




ROTINA 380 R

TECHNICAL DATA


	ROTINA 380 non-refrigerated	ROTINA 380 R refrigerated
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~
frequency	50 – 60 Hz	50 – 60 Hz
consumption	650 VA	1,300 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	4 x 290 ml	4 x 290 ml
max. RPM	15,000 min ⁻¹	15,000 min ⁻¹
max. RCF	24,400	24,400
running time	1 – 99 h: 59 min: 59 sec, ∞ continuous run, short cycle mode	1 – 99 h: 59 min: 59 sec, ∞ continuous run, short cycle mode
dimensions (WxDxH)	457x600x418 mm	457x750x418 mm
weight	approx. 51 kg	approx. 81 kg
noise level	54 dB (A) with rotor 1760	54 dB (A) with rotor 1760
temperature control, infinitely variable	-	from -20 to +40 °C
Cat. No.	1701	1706
100 – 127 V 1 ~ / 50 – 60 Hz *)	1701-01	1706-01
consumption	700 VA	1,400 VA
emission, immunity	FCC class B	FCC class B
weight	approx. 58.5 kg	approx. 88.5 kg


*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 4-place	90°	5,000 min ⁻¹	4x290 ml	1754	90
	swing-out rotor, 4-place	90°	4,000 min ⁻¹	4x290 ml	1798	92
	swing-out rotor, 6-place	90°	4,000 min ⁻¹	6x50 ml	1726	94
	swing-out rotor, 2-place	90°	4,000 min ⁻¹	10 plates	1760	96
	swing-out rotor, 2-place	90°	5,100 min ⁻¹	12 plates	1770	96
ANGLE ROTORS						
	angle rotor, 6-place	45°	10,000 l 11,000 min ⁻¹	6x94 ml	1720	97
	angle rotor, 6-place	45°	10,000 l 11,000 min ⁻¹	6x94 ml	1792	98
	angle rotor, 30-place	45°	15,000 min ⁻¹	30x2 ml	1789-A	99


SWING-OUT ROTOR, 4-PLACE | 1754

	
Rotor	
max. RPM max. RCF	5,000 min ⁻¹ 4,863
max. capacity	4 x 290 ml
run-up run-down, braked in sec	42 27
angle max. noise level	90° 60 dB (A)
temperature in °C ¹⁾	0
Cat. No.	1754


	
Bucket	
lid bioseal ⁵⁾	1751
Cat. No.	1752



	
Vessels	
capacity in ml	1.5 2.0 3 4 5 6 7 9 15 20 25 45 50 94 100
Ø x L in mm	11 x 38 11 x 38 10 x 60 12 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 21 x 100 24 x 100 31 x 100 34 x 100 38 x 102 40 x 115
max. RCF ²⁾	top / bottom 3,494 / 4,779 3,494 / 4,779 4,779 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,807 4,640
radius in mm	top / bottom 125 / 171 125 / 171 171 167 167 167 167 167 167 167 167 167 167 172 166
Cat. No.	microliter tubes tubes ²⁾

	
Adapter	
boring Ø x L in mm	11.2x39.5 11.2x39.5 11.2x39.5 12.5x56 12.5x56 12.5x56 12.5x56 17.5x62 17.5x62 25.5x81 25.5x81 35.5x81 35.5x81 38.5x80 41x97
vessels per rotor	144 144 72 96 96 96 96 52 52 24 24 12 12 8 4
Cat. No.	1761 1761 1761 1762-A 1762-A 1762-A 1762-A 1763-A 1763-A 1764 1764 1765 1765 1777 1767

	
Vessels	
capacity in ml	100 250 1.1-1.4 2.6-3.4 2.7-3 4-5.5 4.5-5 4.5-5 4.9 4.9 7.5-8.5 9-10 10 1.6-5 4-7
Ø x L in mm	44 x 100 65 x 115 8 x 66 13 x 65 11 x 66 15 x 75 11 x 92 11 x 92 13 x 90 13 x 90 15 x 92 16 x 92 15 x 102 13 x 75 13 x 100
max. RCF ²⁾	4,640 4,640 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668
radius in mm	166 166 167 167 167 167 167 167 167 167 167 167 167 167 167
Cat. No.	tubes ²⁾ blood collection tubes / urine tubes

	
Adapter	
boring Ø x L in mm	45 x 87 66 x 104.5 9 x 49 13.5 x 54 12.5 x 56 17.5 x 62 12.5 x 56 13.2 x 72 13.5 x 54 13.2 x 72 17.5 x 62 17.5 x 62 17.5 x 62 13.5 x 54 13.5 x 54
vessels per rotor	4 4 96 64 96 52 96 76 64 76 52 52 52 64 64
Cat. No.	1766 1768 1781 1783-A 1762-A 1763-A 1762-A 1787 1783-A 1787 1763-A 1763-A 1763-A 1783-A 1783-A

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.

SWING-OUT ROTOR, 4-PLACE | 1754


Rotor

max. RPM max. RCF	5,000 min ⁻¹ 4,863
max. capacity	4 x 290 ml
run-up run-down, braked in sec	42 27
angle max. noise level	90° 60 dB (A)
temperature in °C ¹⁾	0
Cat. No.	1754



Bucket

lid bioseal ⁵⁾	1751
Cat. No.	1752



Vessels

capacity in ml	4 – 7	4 – 7	8	8.5 – 10	5	15	50	12	25	30	50	50	14	10	30
Ø x L in mm	13x100	16x75	16x125	16x100	17x59	17x120	29 x 115	17x100	25x90	25x110	29x115	29x115	16,5x106	16x80	26x95
max. RCF ²⁾	4,668	4,668	4,668	4,668	4,863	4,863	4,863	4,696	4,528	4,528	4,752	4,752	4,668	4,668	4,807
radius in mm	167	167	167	167	174	174	174	168	162	162	170	170	167	167	172
Cat. No.	blood collection tubes / urine tubes				-	tubes with screw cap									



Adapter

boring Ø x L in mm	13.2x72	17.5x62	17.5x62	17.5x62	17x52	17x84	30x84	17x78	26.5x72	26.5x72	30x80	30x80	17.5x62	17.5x62	26.5x70
vessels per rotor	76	52	12	52	32	36	16	36	20	20	16	16	52	52	24
Cat. No.	1787	1763-A	1763-A	1763-A	1738	1771-A	1772-A	1773	1779	1779	1774-A	1774-A	1763-A	1763-A	1775

Vessels

capacity in ml	50	85	94	175	175	200	225	250	290
Ø x L in mm	29x107	38x106	38x102	61 x 118	62 x 144	60 x 130	61 x 137	61 x 122	62 x 137
max. RCF ²⁾	4,752	4,807	4,807	4,863	4,863	4,863	4,863	4,863	4,863
radius in mm	170	172	172	174	174	174	174	174	174
Cat. No.	tubes with screw cap			Falcon	Nalgene	Nunc®	Falcon	5127 ²⁴⁾	- ²⁴⁾



Adapter

boring Ø x L in mm	30 x 80	38.5 x 80	38.5 x 80	62 x 111	62 x 111	62 x 111	62 x 111	62 x 100	62 x 100
vessels per rotor	16	8	8	4	4	4	4	4	4
Cat. No.	1774-A	1777	1777	1782	1778	1778	1782	1769	1769

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.


3.3) When using these tubes, bucket 1752 or 5051 cannot be closed with lid 1751 or 5053.

5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

21) Adapter must be loaded as illustrated.

24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 1798




Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,898
max. capacity	4 x 100 ml
run-up run-down, braked in sec	24 17
angle max. noise level	90° 55 dB (A)
temperature in °C ¹⁾	-8
Cat. No.	1798

Bucket

lid	5053
Cat. No.	5051



Vessels

capacity in ml	1.5	2	1.5	2	3	5	6	7	9	15	25	50	100	100
Ø x L in mm	11 x 38	11 x 38	11 x 38	11 x 38	10 x 60	12 x 75	12 x 82	12 x 100	14 x 100	17 x 100	24 x 100	34 x 100	40 x 115	44 x 100
max. RCF ²⁾	1,950 / 2,826	1,950 / 2,826	2,826	2,826	2,737	2,773	2,773	2,755	2,773	2,755	2,755	2,755	2,755	2,755
radius in mm	109 / 158	109 / 158	158	158	153	155	155	154	155	154	154	154	154	154
Cat. No.	microliter tubes				tubes²⁾									

Adapter

boring Ø x L in mm	12.5 x 42	12.5 x 42	11.5 x 50	11.5 x 50	11 x 44	12.5 x 42	12.5 x 42	12.5 x 86	16 x 50	17.5 x 86	26 x 86	36 x 86	42 x 86	45.5 x 86
vessels per rotor	160	160	64	64	80	80	80	80	48	48	20	8	4	4
Cat. No.	5257	5257	5281	5281	5267	5227	5227	5247¹⁵⁾	5264	5248¹⁵⁾	5242	5243	5249	5262

Vessels

capacity in ml	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10
Ø x L in mm	8 x 66	13 x 65	11 x 66	15 x 75	11 x 92	13 x 90	15 x 92	16 x 92	15 x 102	13 x 75	13 x 100	16 x 75	16 x 100
max. RCF ²⁾	2,737	2,808	2,773	2,773	2,773	2,808	2,773	2,755	2,755	2,808	2,808	2,773	2,755
radius in mm	153	157	155	155	155	157	155	154	154	157	157	155	154
Cat. No.	blood collection tubes / urine tubes												

Adapter

boring Ø x L in mm	11 x 44	13.5 x 52	12.5 x 42	16 x 50	12.5 x 42	13.5 x 52	16 x 50	17.6 x 86	17.6 x 86	13.5 x 52	13.5 x 52	16 x 50	17.5 x 86
vessels per rotor	80	48	80	48	80	48	48	44	44	48	48	48	48
Cat. No.	5267	5268	5227	5264	5227	5268	5264	5258	5258	5268	5268	5264	5248

Vessels

capacity in ml	30	50	15	12	30	50	1–8
Ø x L in mm	25 x 110	29 x 115	17 x 120	17 x 100	25 x 110	29 x 115	simple / multiple
max. RCF ²⁾	2,755	2,826	2,898	2,898	2,755	2,755	1,735 / 2,737
radius in mm	154	158	162	162	154	154	97 / 153
Cat. No.	tubes with screw cap						cyto chambers

Adapter


boring Ø x L in mm	26 x 86	30 x 86	17 x 90	17 x 90	26 x 86	36 x 86	-
vessels per rotor	20	8	28	28	20	8	8
Cat. No.	5266	5259	6306	6306	5266	5243	5280

CYTO


Cyto system available for this model.
More information on [page 178](#)


- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.3) When using these tubes, bucket 1752 or 5051 cannot be closed with lid 1751 or 5053.
- 15) Also available with decanting aid. (Cat. No. 5247-91 or 5248-91).

SWING-OUT ROTOR, 4-PLACE | 1798

	
Rotor	
max. RPM max. RCF	4,000 min ⁻¹ 3,095
max. capacity	4 x 290 ml
run-up run-down, braked in sec	24 17
angle max. noise level	90° 56 dB (A)
temperature in °C ¹⁾	-8
Cat. No.	1798

	
Bucket	
lid bioseal ⁵⁾	5093
Cat. No.	5092





	
Vessels	
capacity in ml	5 6 7 15 25 50 100 100 250 15 30 50 12 25 30
Ø x L in mm	12x75 12x82 12x100 17x100 24x100 34x100 44x100 40x115 65x115 17x120 25x110 29x115 17x100 25x90 25x110
max. RCF ²⁾	3,005 3,005 3,005 2,952 2,898 2,952 2,952 2,952 3,095 3,095 2,898 3,095 3,005 2,826 2,898
radius in mm	168 168 168 165 162 165 165 165 173 173 162 173 168 158 162
Cat. No.	tubes ²⁾ tubes with screw cap

	
Adapter	
boring Ø x L in mm	12.8x45 12.8x45 13.2x82 17.5x60.7 25.5x82 35.5x85 45.5x85 42x85 66x103 17x85 25.5x82 30x85 17.5x82 26x73 25.5x82
vessels per rotor	48 48 48 32 16 4 4 4 4 28 16 8 28 12 16
Cat. No.	5128 5128 5120 5136 5122 5124 5125 5126 1791 5129 5122 5123 5121 5134 5122

	
Vessels	
capacity in ml	50 10 250 290 1.1-1.4 2.6-3.4 2.7-3 4-5.5 4.5-5 4.9 7.5-8.5 9-10 10 1.6-5 4-7
Ø x L in mm	29x115 16x80 61x122 62x137 8x66 13x65 11x66 15x75 11x92 13x90 15x92 16x92 15x102 13x75 16x75
max. RCF ²⁾	3,023 2,952 3,095 3,095 2,540 2,540 2,540 2,952 3,005 2,952 2,952 2,952 2,952 2,540 2,952
radius in mm	169 165 173 173 142 142 142 165 168 165 165 165 165 142 165
Cat. No.	tubes with screw cap 5127 ²⁴⁾ - ²⁴⁾ blood collection tubes / urine tubes

	
Adapter	
boring Ø x L in mm	30x99 17.5x60.7 66x103 66x103 13.2x54.5 13.2x54.5 13.2x54.5 17.5x60.7 13.2x82 13.5x60.7 17.5x60.7 17.5x60.7 17.5x60.7 13.2x54.5 17.5x60.7
vessels per rotor	8 32 4 4 48 48 48 32 48 32 32 32 32 48 32
Cat. No.	5135 5136 6319 6319 5138 5138 5138 5136 5120 5137 5136 5136 5136 5138 5136

	
Vessels	
capacity in ml	4-7 8 8.5-10
Ø x L in mm	13x100 16x125 16x100
max. RCF ²⁾	3,005 3,059 2,952
radius in mm	168 171 165
Cat. No.	blood collection / urine tubes

	
Adapter	
boring Ø x L in mm	13.2x82 17.5x82 17.5x60.7
vessels per rotor	48 28 32
Cat. No.	5120 5121 ⁴⁾ 5136

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.5) When using these tubes, bucket 5092 cannot be closed with lid 5053.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6-PLACE | 1726



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,808
max. capacity	6 x 50 ml
run-up run-down, braked in sec	19 18
angle temperature in °C ¹⁾	90° -6
Cat. No.	1726



Vessels

capacity in ml	5	5	6	7	9	15	20	25	45	50	8.5 x 10	30	1 – 8	
Ø x L in mm	12x75	12x75	12x82	12x100	14x100	17x100	21x100	24x100	31x100	34x100	16x100	26x95	simple / multiple	
max. RCF ²⁾	2,576	2,522	2,665	2,665	2,665	2,665	2,719	2,808	2,719	2,808	2,665	2,808	2,003	
radius in mm	144	141	149	149	149	149	152	157	152	157	149	157	112	
Cat. No.	tubes ²⁾											-	-	cyto chambers



Carrier

boring Ø x L in mm	12.5x64.4	13.5x65	12.5x71.5	12.5x71.5	14.6x74	17.6x71.5	21.5x74	26x78	32x74	35x78	17.6x71.5	26x78	-
vessels per rotor	24	102	24	24	30	24	12	12	6	6	24	12	6
Cat. No.	1369-91	1372	1369-92	1369-92	1370	1369	1346	1745	1345	1746	1369	1745	1660

CYTO

Cyto system available for this model.
More information on [page 178](#)

SWING-OUT ROTOR, 6-PLACE | 1726



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,808
max. capacity	42 x 15 ml
run-up run-down, braked in sec	19 18
angle max. noise level	90° 54 dB (A)
temperature in °C ¹⁾	-6
Cat. No.	1726



Carrier

Cat. No.	1742
-----------------	-------------



Vessels

capacity in ml	15	2.6-3.4	4-5.5	7.5-8.5	9-10	10	1.6-5	4-7	8.5-10	15
Ø x L in mm	17x100	13x65	15x75	15x92	16x92	15x102	13x75	16x75	16x100	17x120
max. RCF ²⁾	2,808	2,683	2,683	2,808	2,808	2,808	2,683	2,683	2,808	2,808
radius in mm	157	150	150	157	157	157	150	150	157	157
Cat. No.	-²⁾	blood collection tubes / urine tubes								-



Spacer


boring Ø x L in mm	17.6 x 78	17.6 x 78	17.6 x 78	17.6 x 78	17.6 x 78	17.6 x 78	17.6 x 78	17.6 x 78	17.6 x 78	17.6 x 78
vessels per rotor	42	42	42	42	42	18	42	42	42	18
Cat. No.	-	0716	0716	-	-	-	0716	0716	-	-


- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 21) Adapter must be loaded as illustrated.

— SWING-OUT ROTOR, 6-PLACE | 1726

			
Rotor		Bucket	
max. RPM max. RCF	4,000 min ⁻¹ 2,325	Cat. No.	1366
max. capacity	72 x 4 ml		
run-up run-down, braked in sec	19 18		
angle max. noise level	90° 54 dB (A)		
temperature in °C ¹⁾	-6		
Cat. No.	1726		




	
Vessels	
capacity in ml	1.5 2.0 1 3 4
Ø x L in mm	11 x 38 11 x 38 6 x 45 10 x 60 12 x 60
max. RCF ²⁾	2,325 2,325 2,308 2,290 2,290
radius in mm	130 130 129 128 128
Cat. No.	microliter tubes Rhesus tubes ²⁾


	
Adapter	
boring Ø x L in mm	11.5 x 38 11.5 x 38 6.5 x 23 10.5 x 23 12.5 x 44
vessels per rotor	54 54 180 72 72
Cat. No.	5277 5277 1357 1327 1326

— SWING-OUT ROTOR, 6-PLACE | 1726

			
Rotor		Carrier	
max. RPM max. RCF	4,000 min ⁻¹ 2,808	Cat. No.	1741
max. capacity	60 x 9 ml		
run-up run-down, braked in sec	19 18		
angle max. noise level	90° 54 dB (A)		
temperature in °C ¹⁾	-6		
Cat. No.	1726		




	
Vessels	
capacity in ml	9 1.1 – 1.4 4.5 – 5 4.9 1.6 – 5 4 – 7
Ø x L in mm	14 x 100 8 x 66 11 x 92 13 x 90 13 x 75 13 x 100
max. RCF ²⁾	2,773 2,773 2,808 2,808 2,486 2,808
radius in mm	155 155 157 157 139 157
Cat. No.	- ²⁾ blood collection tubes / urine tubes

	
Adapter	
boring Ø x L in mm	14.6 x 78 14.6 x 78 14.6 x 78 14.6 x 78 14.6 x 78 14.6 x 78
vessels per rotor	60 60 36 60 60 60
Cat. No.	0701 0701 - - 6x0768 ¹⁶⁾ -

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Packaging unit 10 pieces.
- Adapter must be loaded as illustrated.


SWING-OUT ROTOR, 2-PLACE | 1760

Rotor	
max. RPM max. RCF	4,000 min ⁻¹ 2,397
max. capacity	10 plates
run-up run-down, braked in sec	30 23
angle max. noise level	90° 54 dB (A)
temperature in °C ¹⁾	-8
Cat. No.	1760




Plates									
W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	84x59x11	124x82x20	-
capacity in ml	-	-	-	-	-	-	-	-	0.2
max. RCF ²⁾	2,397	2,397	2,397	2,397	2,397	2,397	2,397	2,397	2,397
radius in mm	134	134	134	134	134	134	134	134	134
Cat. No.	MTP	MTP	CP	DWP	MS	QP	Microtest plates	PCR plate	PCR strips
+									
Bucket	-	-	-	-	-	-	-	-	-
boring Ø x L in mm	-	-	-	-	-	-	-	-	-
plates / strips per rotor	10	8	6	2	2	2	4	2	24 x 8
Cat. No.	1753-A	1753-A	1753-A	1753-A	1753-A	1753-A	1753-A	1753-A+1485	1753-A+1485

SWING-OUT ROTOR, 2-PLACE | 1770

Rotor	
max. RPM max. RCF	5,100 min ⁻¹ 3,926
capacity in ml	12 plates
run-up run-down, braked in sec	65 30
angle temperature in °C ¹⁾	90° -3
Cat. No.	1770



Bucket	
lid bioseal ³⁾	4627
Cat. No.	4745



Plates									
W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	84x59x11	124x82x20	-
Ø x L in mm	-	-	-	-	-	-	-	-	0,2
max. RCF ²⁾	3,926	3,926	3,926	3,926	3,926	3,926	3,926	3,926	3,926
radius in mm	135	135	135	135	135	135	135	135	135
Cat. No.	MTP	MTP	CP	DWP	MS	QP	Microtest plates	PCR plate	PCR strips
+									
Removal frame	-	-	-	-	-	-	-	-	-
boring Ø x L in mm	-	-	-	-	-	-	-	-	-
plates / strips per rotor	12	10	8	2	2	2	4	2	24 x 8
Cat. No.	4626	4626	4626	4626	4626	4626	4626	4626 + 1485	4626 + 1485

ANGLE ROTOR, 6-PLACE | 1720



Rotor

max. RPM	ROTINA 380 380 R	10,000 min ⁻¹ 11,000 min ⁻¹
max. RCF		13,528 16,369
max. capacity		6 x 94 ml
run-up / run-down, braked in sec		39 / 36 45 / 44
angle max. noise level		45° 59 dB (A)
temperature in °C ¹⁾		+1
Cat. No.		1720



Vessels

capacity in ml	1.5	2.0	15	25	50	94	7.5 – 8.5	9 – 10	8.5 – 10	5	15	50	10	30	50
Ø x L in mm	11x38	11x38	17x100	24x100	34x100	38x102	15x92	16x92	16x100	17x59	17x120	29x115	16x80	26x95	29x107
max. RCF ²⁾	ROTINA 380	12,969	12,969	12,745	12,410	13,304	13,528	12,745	12,745	12,745	12,857	13,081	12,745	12,410	12,969
max. RCF ²⁾	ROTINA 380 R	15,692	15,692	15,422	15,016	16,098	16,369	15,422	15,422	15,422	15,557	15,828	15,422	15,016	15,692
radius in mm	116	116	114	111	119	121	114	114	114	115	117	114	111	111	116
Cat. No.	microliter tubes		tubes ²⁾				blood collection tubes / urine tubes			-	tubes with screw cap				



Adapter

boring Ø x L in mm	11.4 x 39	11.4 x 39	17.5 x 92	26 x 85	35 x 89	38.4 x 89	17.5 x 92	17.5 x 92	17.5 x 92	17 x 51	17 x 106	29.8 x 97	16.5 x 74	26 x 85	29 x 92
vessels per rotor	24	24	6	6	6	6	6	6	6	6	6	6	12	6	6
Cat. No.	1449	1449	1451	1447	1463	-	1451	1451	1451	1476	1466	1454	1448	1447	1446

Vessels

capacity in ml	85	94
Ø x L in mm	38 x 106	38 x 102
max. RCF ²⁾	ROTINA 380	13,528
max. RCF ²⁾	ROTINA 380 R	16,369
radius in mm	121	121
Cat. No.	tubes with screw cap	



Adapter

boring Ø x L in mm	38.4 x 89	38.4 x 89
vessels per rotor	6	6
Cat. No.	-	-

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

ANGLE ROTOR, 6-PLACE | 1792

Rotor	
max. RPM	10,000 min ⁻¹ 11,000 min ⁻¹
max. RCF	13,640 16,504
max. capacity	6 x 94 ml
run-up run-down, braked in sec	40 / 37 48 / 44
angle max. noise level	45° 59 dB (A)
temperature in °C ¹⁾	+4
Cat. No.	1792


lid bioseal ⁵⁾

Cat. No.

INCLUSIVE


Vessels																
capacity in ml	1.5	2.0	15	25	50	94	7.5 – 8.5	9 – 10	10	8.5 – 10	5	15	50	10	30	
Ø x L in mm	11 x 38	11 x 38	17 x 100	24 x 100	34 x 100	38 x 102	15 x 92	16 x 92	15 x 102	16 x 100	17 x 59	17 x 120	29 x 115	16 x 80	26 x 95	
max. RCF ²⁾	13,081	13,081	12,857	12,522	13,416	13,640	12,857	12,857	12,857	12,857	12,745	13,081	13,304	12,857	12,522	
max. RCF ²⁾	15,828	15,828	15,557	15,151	16,233	16,504	15,557	15,557	15,557	15,557	15,422	15,828	16,098	15,557	15,151	
radius in mm	117	117	115	112	120	122	115	115	115	115	114	117	119	115	112	
Cat. No.	microliter tubes		tubes ²⁾				blood collection tubes / urine tubes				-	tubes with screw cap				



Adapter																
boring Ø x L in mm	11.4x39	11.4x39	17.5x92	26x85	35x89	38.2x89.6	17.5x92	17.5x92	17.5x92	17.5x92	17x51	17x106	29.8x97	16.5x74	26x85	
vessels per rotor	24	24	6	6	6	6	6	6	6	6	6	6	6	12	6	
Cat. No.	1449	1449	1451	1447	1463	-	1451	1451	1451	1451	1476	1466	1454	1448	1447	

Vessels		
capacity in ml	50	85
Ø x L in mm	29 x 107	38 x 106
max. RCF ²⁾	13,081	13,640
max. RCF ²⁾	15,828	16,504
radius in mm	117	122
Cat. No.	tubes with screw cap	



Adapter	
boring Ø x L in mm	29 x 92
vessels per rotor	6
Cat. No.	1446

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.

ANGLE ROTOR, 30-PLACE | 1789-A

		+ 	
Rotor		Lid bioseal[®], phenol-resistant	
max. RPM max. RCF	15,000 min ⁻¹ 24,400 min ⁻¹	Cat. No.	INCLUSIVE
max. capacity	30 x 2 ml		
run-up run-down, braked in sec	24 24		
angle max. noise level	45° 60 dB (A)		
temperature in °C ¹⁾	+4		
Cat. No.	1789-A		



	
Vessels	
capacity in ml	0.2 0.4 0.5 0.8 1.5 2 0.5
Ø x L in mm	6 x 18 6 x 45 8 x 30 8 x 45 11 x 38 11 x 38 10.7 x 36
max. RCF ²⁾	24,400 24,400 24,400 24,400 24,400 24,400 23,394
radius in mm	97 97 97 97 97 97 93
Cat. No.	microliter tubes Pediatric

	
Adapter	
boring Ø x L in mm	6 x 40 6 x 40 8 x 40 8 x 40 10.2x19.3 11.2x40.9 11.2x40.9
vessels per rotor	30 30 30 30 30 30 15
Cat. No.	2024 2024 2023 2023 2031⁷⁾ - 0788¹⁷⁾

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use form-fitting, phenol-resistant adapters. Cat. No. 2031.
- 17) Packaging unit 15 pieces.

PACKAGES

ROTINA 380 BLOOD TUBE PACKAGE 1		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 380 centrifuge	1701	64	1.6 - 7	13 x 75 / 100	5,000	4,668
- 1 x swing-out rotor, 4-place	1754	52	4 - 10	16 x 75 / 100	5,000	4,668
- 4 x bucket	1752					
- 4 x lid (bioseal)	1751					
- 4 x adapter, 16-place	1783-A					
- 4 x adapter, 13-place	1763-A					
1701SET1						



ROTINA 380 CONICAL PACKAGE 2		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 380 centrifuge	1701	64	1.6 - 7	13 x 75 / 100	5,000	4,668
- 1 x swing-out rotor, 4-place	1754	52	4 - 10	16 x 75 / 100	5,000	4,668
- 4 x bucket	1752					
- 4 x adapter, 9-place (conical)	1771-A					
- 4 x adapter, 4-place (conical)	1772-A					
1701SET2						



ROTINA 380 R CONICAL PACKAGE 1		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 380 R centrifuge	1706	64	1.6 - 7	13 x 75 / 100	5,000	4,668
- 1 x swing-out rotor, 4-place	1754	52	4 - 10	16 x 75 / 100	5,000	4,668
- 4 x bucket	1752					
- 4 x adapter, 9-place (conical)	1771-A					
- 4 x adapter, 4-place (conical)	1772-A					
1706SET1						



ROTINA 380 R BLOOD TUBE PACKAGE 2		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 380 R centrifuge	1706	64	1.6 - 7	13 x 75 / 100	5,000	4,668
- 1 x swing-out rotor, 4-place	1754	52	4 - 10	16 x 75 / 100	5,000	4,668
- 4 x bucket	1752					
- 4 x lid (bioseal)	1751					
- 4 x adapter, 16-place	1783-A					
- 4 x adapter, 13-place	1763-A					
1706SET2						



ROTINA 420 | 420 R

Many solutions – one rotor

This compact benchtop centrifuge has been developed for large sample volumes. It has a maximum capacity of 4 x 600 ml bottles, 140 blood tubes, 16 microtiter plates or 52 x 15 ml conical tubes, all on a single cost-effective rotor. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (ROTINA 420 R).

— FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 24,400 – adjustable in steps of 1
- Max. capacity: 4 x 600 ml
- High-performance with first-class equipment
- Choice of 5 rotors
- IVD-conform according to directive 98/79/EC
- Max. noise level of 51 dB(A) with rotor 4790-A
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- 9 individual acceleration and deceleration stages
- Model 420 R coolable from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Hematological laboratories
- Blood centers
- Veterinary laboratories
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research



Centrifuge packages for the model can be found on [page 109](#)



More information about the control panel can be found on [page 198](#)

CYTO

Cyto system available for this model.
More information on [page 178](#)



according to directive 98/79/EC



ROTINA 420



ROTINA 420 R

TECHNICAL DATA


	ROTINA 420 non-refrigerated	ROTINA 420 R refrigerated
voltage *)	200–240 V 1 ~	200–240 V 1 ~
frequency	50–60 Hz	50 Hz
consumption	870 VA	1,600 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	4 x 600 ml	4 x 600 ml
max. RPM	15,000 min ⁻¹	15,000 min ⁻¹
max. RCF	24,400	24,400
running time	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode
dimensions (WxDxH)	506 x 650 x 423 mm	713 x 654 x 423 mm
weight	approx. 75 kg	approx. 108 kg
noise level	51 dB (A) with rotor 4790-A	50 dB (A) with rotor 4790-A
temperature control, infinitely variable	-	from -20 to +40 °C
Cat. No.	4701	4706
100–127 V 1 ~ / 50–60 Hz *)	4701-01	4706-01
consumption	900 VA	1,850 VA
emission, immunity	FCC class B	FCC class B
weight	approx. 84 kg	approx. 117 kg


*) Other voltages on request.

AVAILABLE ROTORS



SWING-OUT ROTORS		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 4-place	90°	4,800 min ⁻¹	4x600 ml	4784-A	102
	swing-out rotor, 4-place	90°	4,000 min ⁻¹	4x290 ml	4753	104
ANGLE ROTORS						
	angle rotor, 4-place	25°	9,500 min ⁻¹	4x250 ml	4795	106
	angle rotor, 6-place	45°	11,000 min ⁻¹	6x94 ml	4794	107
	angle rotor, 30-place	45°	15,000 min ⁻¹	30x2 ml	4790-A	108


SWING-OUT ROTOR, 4-PLACE | 4784-A


	
Rotor	
max. RPM max. RCF	4,800 min ⁻¹ 4,740
max. capacity	4 x 600 ml
run-up run-down, braked in sec	54 38
angle max. noise level	90° 56 dB (A)
temperature in °C ¹⁾	+4
Cat. No.	4784-A


	
Bucket with clamp lock	
lid bioseal ⁵⁾	4783
Cat. No.	4780
	
Bucket without clamp lock ¹⁴⁾	
Cat. No.	4785



															
Vessels															
capacity in ml	1.5	2.0	3	4	4	5	6	7	15	25	50	94	100	100	250
Ø x L in mm	11 x 38	11 x 38	10 x 60	10 x 88	12 x 60	12 x 75	12 x 82	12 x 100	17 x 100	24 x 100	34 x 100	38 x 102	40 x 115	44 x 100	65 x 115
max. RCF ²⁾	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,559	4,559	4,559	4,534	4,534
radius in mm	178	178	178	178	178	178	178	178	178	178	177	177	177	176	176
Cat. No.	microliter tubes			tubes ²⁾											


															
Adapter															
boring Ø x L in mm	11.2 x 38	11.2 x 38	11.2 x 54	11.2 x 54	13.4 x 55	13.4 x 55	13.4 x 55	13.4 x 55	17.5 x 62	26.5 x 69	36 x 77	42 x 76.5	42 x 76.5	46 x 76.5	66 x 97
vessels per rotor	96	96	140	140	104	104	104	104	72	28	16	12	12	8	4
Cat. No.	4773	4773	4761	4761	4762	4762	4762	4762	4763	4764	4765	4766	4766	4767	4768


															
Vessels															
capacity in ml	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	1.6–7	1.6–7	4–7	8	8.5–10	5	15
Ø x L in mm	8 x 66	13 x 65	11 x 66	15 x 75	11 x 92	13 x 90	15 x 92	16 x 92	13 x 75	13 x 100	16 x 75	16 x 125	16 x 100	17 x 59	17 x 120
max. RCF ²⁾	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,740	4,740
radius in mm	178	178	178	178	178	178	178	178	178	178	178	178	178	184	184
Cat. No.	blood collection / urine vessels													-	-

															
Adapter															
boring Ø x L in mm	11.2 x 54	13.4 x 55	11.2 x 54	17.5 x 62	11.2 x 54	13.4 x 55	17.5 x 62	17.5 x 62	13.7 x 55	13.7 x 55	17.5 x 62	17.5 x 62	17.5 x 62	17 x 52	17 x 84
vessels per rotor	140	104	140	72	140	104	72	72	84	84	72	24	72	48	52
Cat. No.	4761	4762	4761	4763	4761	4762	4763	4763	4775	4775	4763	4763	4763	4778	4769



- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 6) When using these tubes, bucket 4780 cannot be closed with lid 4783.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- With the E3905 add-on kit and the 4783 lid, the 4785 carrier can be converted at a later time to a 4780 carrier with single-hand clamp lock.
- Adapter must be loaded as illustrated.
- Suitable for blood collection systems with a lid larger than 17 mm in diameter.

SWING-OUT ROTOR, 4-PLACE | 4784-A

	
Rotor	
max. RPM max. RCF	4,800 min ⁻¹ 4,740
max. capacity	4 x 600 ml
run-up run-down, braked in sec	54 38
angle max. noise level	90° 56 dB (A)
temperature in °C ¹⁾	+4
Cat. No.	4784-A

	
Bucket with clamp lock	
lid bioseal ⁵⁾	4783
Cat. No.	4780
	
Bucket without clamp lock ¹⁴⁾	
Cat. No.	4785



	
Vessels	
capacity in ml	50 12 25 30 50 10 30 50 85 94 175 175 200 225 250
Ø x L in mm	29 x 115 17 x 100 25 x 90 25 x 110 29 x 115 16 x 80 26 x 95 29 x 107 38 x 106 38 x 102 61 x 118 62 x 144 60 x 130 61 x 137 61 x 122
max. RCF ²⁾	4,688 4,688 4,585 4,585 4,688 4,585 4,585 4,688 4,534 4,534 4,740 4,740 4,740 4,740 4,740
radius in mm	182 182 178 178 182 178 178 182 176 176 184 184 184 184 184
Cat. No.	tubes with screw cap Falcon Nalgene Nunc® Falcon 5127 ²⁴⁾
	
Adapter	
boring Ø x L in mm	30 x 82.5 17.2 x 82.5 26.5 x 69 26.5 x 69 30 x 82.5 17.5 x 62 26.5 x 69 30 x 82.5 42 x 76.5 42 x 76.5 61 x 105 61.5 x 110 61.5 x 110 61 x 105 62 x 100
vessels per rotor	20 56 28 28 20 72 28 20 12 12 4 4 4 4 4
Cat. No.	4770 4774 4764 4764 4770 ⁴⁾ 4763 4764 4770 ⁴⁾ 4766 4766 4776 4777 4777 4776 4771

	
Vessels	
capacity in ml	290 400 400 600
Ø x L in mm	62 x 137 81 x 136 84 x 134 93 x 134
max. RCF ²⁾	4,740 4,740 4,740 4,740
radius in mm	184 184 184 184
Cat. No.	- ²⁴⁾ - ²⁴⁾ - ²⁴⁾ 0551 ²⁴⁾

	
Adapter	
boring Ø x L in mm	62 x 100 85 x 100 85 x 100 94 x 99
vessels per rotor	4 4 4 4
Cat. No.	4771 4772 4772 -

- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, carrier 4780 cannot be closed with lid 4783.
- Please remove the spacer.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- The screw cap for tube No. 0538 is available with Cat. No. 0539. Dimensions with cap 38 x 110 mm.
- Adapter must be loaded as illustrated.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 4753




Rotor

max. RPM max. RCF	4,000 min ⁻¹ 2,898
max. capacity	4 x 100 ml
run-up run-down, braked in sec	18 16
angle max. noise level	90° 58 dB (A)
temperature in °C ¹⁾	-1
Cat. No.	4753

Bucket

lid	5053
Cat. No.	5051



Vessels

capacity in ml	1.5	2	1.5	2	3	5	6	7	9	15	25	50	100	100
Ø x L in mm	11 x 38	11 x 38	11 x 38	11 x 38	10 x 60	12 x 75	12 x 82	12 x 100	14 x 100	17 x 100	24 x 100	34 x 100	44 x 100	40 x 115
max. RCF ²⁾	1,950 / 2,826	1,950 / 2,826	2,826	2,826	2,737	2,773	2,773	2,755	2,773	2,755	2,755	2,755	2,755	2,755
radius in mm	109 / 158	109 / 158	158	158	153	155	155	154	155	154	154	154	154	154
Cat. No.	microliter tubes				tubes²⁾									

Adapter

boring Ø x L in mm	12.5 x 42	12.5 x 42	11.5 x 50	11.5 x 50	11 x 44	12.5 x 42	12.5 x 42	12.5 x 86	16 x 50	17.5 x 86	26 x 86	36 x 86	45.5 x 86	42 x 86
vessels per rotor	160	160	64	64	80	80	80	80	48	48	20	8	4	4
Cat. No.	5257	5257	5281	5281	5267	5227	5227	5247¹⁵⁾	5264	5248¹⁵⁾	5242	5243	5262	5249

Vessels

capacity in ml	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10
Ø x L in mm	8 x 66	13 x 65	11 x 66	15 x 75	11 x 92	13 x 90	15 x 92	16 x 92	15 x 102	13 x 75	13 x 100	16 x 75	16 x 100
max. RCF ²⁾	2,737	2,808	2,773	2,773	2,773	2,808	2,773	2,755	2,755	2,808	2,755	2,773	2,755
radius in mm	153	157	155	155	155	157	155	154	154	157	154	155	154
Cat. No.	blood collection / urine vessels												

Adapter

boring Ø x L in mm	11 x 44	13.5 x 52	12.5 x 42	16 x 50	12.5 x 42	13.5 x 52	16 x 50	17.6 x 86	17.6 x 86	13.5 x 52	13.5 x 86	16 x 50	17.5 x 86
vessels per rotor	80	48	80	48	80	48	48	44	44	48	48	48	48
Cat. No.	5267	5268	5227	5264	5227	5268	5264	5258	5258	5268	6301	5264	5248

Vessels

capacity in ml	15	30	50	12	50	1–8
Ø x L in mm	17 x 120	25 x 110	29 x 115	17 x 100	29 x 115	simple / multiple
max. RCF ²⁾	2,898	2,755	2,826	2,898	2,755	1,735 / 2,737
radius in mm	162	154	158	162	154	97 / 153
Cat. No.	tubes with screw cap					cyto chambers

Adapter

boring Ø x L in mm	17 x 90	26 x 66	30 x 86	17 x 90	36 x 86	-
vessels per rotor	28	20	8	28	8	8
Cat. No.	6306	5266	5259	6306	5243	5280

CYTO

Cyto system available for this model.
More information on [page 178](#)

- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 4780 or 5051 cannot be closed with lid 4783 or 5053.

SWING-OUT ROTOR, 4-PLACE | 4753

Rotor

max. RPM max. RCF	4,000 min ⁻¹ 3,095
max. capacity	4 x 290 ml
run-up run-down, braked in sec	18 16
angle max. noise level	90° 58 dB (A)
temperature in °C ¹⁾	-1
Cat. No.	4753



Bucket

lid bioseal ⁵⁾	5093
Cat. No.	5092



Vessels

capacity in ml	5	6	7	15	25	50	100	100	250	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9
Ø x L in mm	12x75	12x82	12x100	17x100	24x100	34x100	44x100	40x115	65x115	8 x 66	13 x 65	11x66	15x75	11x92	13x90
max. RCF ²⁾	3,005	3,005	3,005	2,952	2,898	2,952	2,952	2,952	3,095	2,540	2,540	2,540	2,952	3,005	2,952
radius in mm	168	168	168	165	162	165	165	165	173	142	142	142	165	168	165
Cat. No.	tubes²⁾									blood collection / urine vessels					



Adapter

boring Ø x L in mm	12.8x45	12.8x45	13.2x82	17.5x60.7	25.5x82	35.5x82.5	45.5x85	42x85	66x103	13.2x54.5	13.2x54.5	13.2x54.5	17.5x60.7	13.2x82	13.5x60.7
vessels per rotor	48	48	48	32	16	4	4	4	4	48	48	48	32	48	32
Cat. No.	5128	5128	5120	5136	5122	5124	5125	5126	1791	5138	5138	5138	5136	5120	5137

Vessels

capacity in ml	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10	8	15	50	12	25	30	50	10
Ø x L in mm	15x92	16x92	15x102	13x75	13x100	16x75	16x100	16x125	17x120	29x115	17x100	25x90	25x110	29x115	16 x 80
max. RCF ²⁾	2,952	2,952	2,952	2,540	3,005	2,952	2,952	3,059	3,095	3,095	3,005	2,826	2,898	3,023	2,952
radius in mm	165	165	165	142	168	165	165	171	173	173	168	158	162	169	165
Cat. No.	blood collection / urine vessels									tubes with screw cap					




Adapter

boring Ø x L in mm	17.5x60.7	17.5x60.7	17.5x60.7	13.2x54.5	13.2x82	17.5x60.7	17.5x60.7	17.5x82	17x85	30x85	17.5x82	26x73	25.5x82	30x99	17.5x60.7
vessels per rotor	32	32	32	48	48	32	32	28	28	8	28	12	16	8	32
Cat. No.	5136	5136	5136	5138	5120	5136	5136	5121³⁾	5129	5123	5121	5134	5122	5135	5136

Vessels

capacity in ml	250	290
Ø x L in mm	61 x 122	62 x 137
max. RCF ²⁾	3,095	3,095
radius in mm	173	173
Cat. No.	5127²⁴⁾	– 24)




Adapter

boring Ø x L in mm	66x103	66x103
vessels per rotor	4	4
Cat. No.	6319	6319



- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.5) When using these tubes, bucket 5092 cannot be closed with lid 5053.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.


SWING-OUT ROTOR, 4-PLACE | 4784-A

	
Rotor	
max. RPM max. RCF	4,800 min ⁻¹ 4,096
max. capacity	16 plates
run-up run-down, braked in sec	54 38
angle max. noise level	90° 56 dB (A)
temperature in °C ¹⁾	+4
Cat. No.	4784-A



	
Bucket	
Cat. No.	4782



	
Plates	
W x D x H in mm	128x86x15 128x86x17.5 128x86x22 128x86x44.5 128x86x46 84x59x11 124x82x20 -
capacity in ml	- - - - - - - 0,2
max. RCF ²⁾	4,096 4,096 4,096 4,096 4,096 4,096 4,096 4,096
radius in mm	159 159 159 159 159 159 159 159
Cat. No.	MTP MTP CP DWP MS Microtest plate PCR plate 96 wells PCR strips



	
Adapter	
boring Ø x L in mm	- - - - - - - -
plates / strips per rotor	16 16 12 4 4 8 4 48 x 8
Cat. No.	- - - - - - 1485 1485

ANGLE ROTOR, 4-PLACE | 4795

	
Rotor	
max. RPM max. RCF	9,500 min ⁻¹ 12,007
max. capacity	4x250 ml
run-up run-down, braked in sec	45 55
angle	25°
temperature in °C ¹⁾	+2
Cat. No.	4795



	
Vessels	
capacity in ml	15 25 94 15 50 10 30 50 85 94 250
Ø x L in mm	17x100 24x100 38x102 17x120 29x115 16x80 26x95 29x107 38x106 38x102 61x122
max. RCF ²⁾	11,301 10,897 10,292 10,998 10,090 11,402 10,897 10,090 10,292 10,292 12,007
radius in mm	112 108 102 109 100 113 108 100 102 102 119
Cat. No.	tubes ²⁾ tubes with screw cap 5127 ²⁴⁾



	
Adapter	
boring Ø x L in mm	17.6x83 26x80 38.6x88 17x106 30x100 16.6x70 26x80 29x90 38.6x88 38.6x88 61.5x109
vessels per rotor	28 12 4 20 4 32 12 4 4 4 4
Cat. No.	5646 5642 5644 5637 5638 5641 5642 5643 5644 5644 -

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

ANGLE ROTOR, 6-PLACE | 4794

															
Rotor		Lid bioseal⁵⁾		INCLUSIVE											
max. RPM max. RCF	11,000 min ⁻¹ 16,504	Cat. No.													
max. capacity	6 x 94 ml														
run-up run-down, braked in sec	40 63														
angle max. noise level	45° 58 dB (A)														
temperature in °C ¹⁾	+4														
Cat. No.	4794														
Vessels															
capacity in ml	1.5 – 2	3	15	25	50	94	7.5 – 10	5	15	50	10	30	50	85	94
Ø x L in mm	11 x 38	10 x 60	17 x 100	24 x 100	34 x 100	38 x 102	15 x 102 / 16 x 92 ³⁶⁾	17 x 59	17 x 120	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	38 x 102
max. RCF ²⁾	15,828	15,828	15,557	15,151	16,233	16,504	15,557	15,422	15,828	16,098	15,557	15,151	15,828	16,504	16,504
radius in mm	117	117	115	112	120	122	115	114	117	119	115	112	117	122	122
Cat. No.	-	tubes ²⁾					-	-	tubes with screw cap						
Adapter															
boring Ø x L in mm	11.4 x 39	11.4 x 39	17.5 x 92	26 x 85	35 x 89	38.2 x 89.6	17.5 x 92	17 x 51	17 x 106	29.8 x 97	16.5 x 74	26 x 85	29 x 92	38.2 x 89.6	38.2 x 89.6
vessels per rotor	24	24	6	6	6	6	6	6	6	6	12	6	6	6	6
Cat. No.	1449	1449	1451	1447	1463	-	1451	1476	1466	1454	1448	1447	1446	-	-

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

36) Capacity in ml: 8.5-10 Ø x L in mm: 16 x 100.

ANGLE ROTOR, 30-PLACE | 4790-A

		+	Lid bioseal ⁵⁾ , phenol-resistant	Cat. No.	INCLUSIVE
Rotor					
max. RPM max. RCF	15,000 min ⁻¹ 24,400				
max. capacity	30 x 2 ml				
run-up run-down, braked in sec	19 24				
angle max. noise level	45° 50 dB (A)				
temperature in °C ¹⁾	+4				
Cat. No.	4790-A				



		+					
Vessels							
capacity in ml	0.2	0.4	0.5	0.8	1.5	2	0.5
Ø x L in mm	6x18	6x45	8x30	8x45	11x38	11x38	10.7x36
max. RCF ²⁾	24,400	24,400	24,400	24,400	24,400	24,400	23,394
radius in mm	97	97	97	97	97	97	93
Cat. No.	microliter tubes						Pediatric

		+					
Adapter							
boring Ø x L in mm	6x40	6x40	8x40	8x40	10.2x19.3	11.2x40.9	11.2x40.9
vessels per rotor	30	30	30	30	30	30	15
Cat. No.	2024	2024	2023	2023	2031⁷⁾	-	0788¹⁷⁾

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

7) For centrifugation at high speeds, we recommend to use form-fitting, phenol-resistant adapters. Cat. No. 2031.

17) Packaging unit 15 pieces.

PACKAGES

ROTINA 420 BLOOD TUBE PACKAGE 1		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 420 centrifuge	4701	64	1.6 - 7	13 x 75 / 100	4,800	4,585
- 1 x swing-out rotor, 4-place	4784-A	52	4 - 10	16 x 75 / 100	4,800	4,585
- 4 x bucket	4780					
- 4 x lid (bioseal)	4783					
- 4 x adapter, 26-place	4762					
- 4 x adapter, 18-place	4763					
4701SET1						



ROTINA 420 CONICAL PACKAGE 2		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 380 centrifuge	4701	64	1.6 - 7	13 x 75 / 100	5,000	4,668
- 1 x swing-out rotor, 4-place	4784-A	52	4 - 10	16 x 75 / 100	5,000	4,668
- 4 x bucket	4785					
- 4 x adapter, 13-place (conical)	4769					
- 4 x adapter, 5-place (conical)	4770					
4701SET2						



ROTINA 420 R BLOOD TUBE PACKAGE 1		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 420 centrifuge	4706	64	1.6 - 7	13 x 75 / 100	5,000	4,668
- 1 x swing-out rotor, 4-place	4784-A	52	4 - 10	16 x 75 / 100	5,000	4,668
- 4 x bucket	4780					
- 4 x lid (bioseal)	4783					
- 4 x adapter, 26-place	4762					
- 4 x adapter, 18-place	4763					
4706SET1						



ROTINA 420 R CONICAL PACKAGE 2		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTINA 420 R centrifuge	4706	64	1.6 - 7	13 x 75 / 100	5,000	4,668
- 1 x swing-out rotor, 4-place	4784-A	52	4 - 10	16 x 75 / 100	5,000	4,668
- 4 x bucket	4785					
- 4 x adapter, 13-place (conical)	4769					
- 4 x adapter, 5-place (conical)	4770					
4706SET2						



ROTANTA 460 | 460 R

Superior benchtop for multi-purpose use

This powerful unit is capable of virtually any application you choose. It is able to spin high sample volumes of blood tubes, conical tubes, plates and bottles. Speciality buckets are able to accommodate 450 ml blood bags. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (ROTANTA 460 R).

— FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 24,400 min⁻¹ – adjustable in increments of 1
- Max. Capacity: 4 x 1,000 ml
- Choice of 8 rotors
- Medical Device according to directive 93/42/EC
- 28 individual acceleration and deceleration stages
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- Model 460 R coolable from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Transfusion medicine laboratories
- Small blood centers
- Veterinary laboratories
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Oil laboratories
- Chemical industry
- Forensic laboratories



Centrifuge packages for the model can be found on [page 126](#)



More information about the control panel can be found on [page 198](#)

CYTO

Cyto system available for this model.
More information on [page 178](#)



ROTANTA 460

ROTANTA 460 R




TECHNICAL DATA

	ROTANTA 460 non-refrigerated	ROTANTA 460 R refrigerated
voltage *)	220 – 240 V 1 ~	220 – 240 V 1 ~
frequency	50 – 60 Hz	50 Hz
consumption	1,000 VA	1,800 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	4 x 1,000 ml	4 x 1,000 ml
max. RPM	15,000 min ⁻¹	15,000 min ⁻¹
max. RCF	24,400	24,400
running time	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode
dimensions (WxDxH)	554x706x456 mm	770x706x456 mm
weight	approx. 101 kg	approx. 141 kg
noise level	46 dB (A) with rotor 4474	58 dB (A) with rotor 4474
temperature control, infinitely variable	-	from -20 to +40 °C
Cat. No.	5650	5660
100 – 127 V 1 ~ / 60 Hz *)	5650-01	5660-01
consumption	1,100 VA	2,000 VA
emission, immunity	FCC class B	FCC class B
weight	approx. 111 kg	approx. 151 kg


*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

SWING-OUT ROTORS		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 4-place	90°	4,600 min ⁻¹	4 x 750 ml	5699-R	112
	swing-out rotor, 4-place	90°	3,800 min ⁻¹	4 x 1,000 ml	5654	119
	swing-out rotor, 6-place	90°	4,000 min ⁻¹	6 x 290 ml	4446	121
	swing-out rotor, 4-place	90°	2,000 min ⁻¹	4 x 100 ml	4474	123
	swing-out rotor, 2-place	90°	5,900 min ⁻¹ / 6,200 min ⁻¹	12 plates	5622	123

ANGLE ROTORS

	angle rotor, 30-place	45°	15,000 min ⁻¹	30 x 2 ml	4489-A	124
	angle rotor, 6-place	25°	8,500 min ⁻¹ / 9,500 min ⁻¹	6 x 250 ml	5645	124
	angle rotor, 6-place	35°	11,500 min ⁻¹	6 x 94 ml	5615	125

SWING-OUT ROTOR, 4-PLACE | 5699-R


Rotor

max. RPM max. RCF ²⁾	4,600 min ⁻¹ 5,063
max. capacity	4 x 250 ml
run-up run-down, braked in sec	90 95
angle temperature in °C ¹⁾	90° +10
Cat. No.	5699-R



Bucket

lid bioseal ³⁾	5627
Cat. No.	5625-A



Vessels

capacity in ml	1.5	2.0	3	4	4	5	6	7	15	25	50	94	100	100	250
Ø x L in mm	11 x 38	11 x 38	10 x 60	10 x 88	12 x 60	12 x 75	12 x 82	12 x 100	17 x 100	24 x 100	34 x 100	38 x 102	44 x 100	40 x 115	65 x 100
max. RCF ²⁾	3,572	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,495	4,495	4,637	4,495	4,495
radius in mm	151	196	196	196	196	196	196	196	196	196	190	190	196	190	190
Cat. No.	microliter tubes			tubes²⁾											

Adapter

boring Ø x L in mm	11 x 84	11 x 84	11 x 84	11 x 84	13.5 x 84	13.5 x 84	13.5 x 84	13.5 x 84	17.5 x 84	26.5 x 84	36 x 80	42 x 80	46 x 84	42 x 80	66 x 80
vessels per rotor	224	224	120	120	80	80	80	80	68	24	12	12	8	12	4
Cat. No.	4730	4730	4730	4730	4732	4732	4732	4732	4733	4734	4735	4736	4737	4736	4738

Vessels

capacity in ml	1.1-1.4	2.6-3.4	2.7-3	4-5.5	4.5-5	4.9	7.5-8.5	9-10	10	1.6-5	4-7	4-7	8.5-10	14	15
Ø x L in mm	8 x 66	13 x 65	11 x 66	15 x 75	11 x 92	13 x 90	15 x 92	16 x 92	15 x 102	13 x 75	13 x 100	16 x 75	16 x 100	16.5 x 106	17 x 120
max. RCF ²⁾	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637
radius in mm	196	196	196	196	196	196	196	196	196	196	196	196	196	196	196
Cat. No.	blood collection / urine vessels													tubes with screw cap	

Adapter

boring Ø x L in mm	11 x 84	13.5 x 84	13.5 x 84	17.5 x 84	13.5 x 84	13.5 x 84	17.5 x 84	17.5 x 84	17.5 x 84	13.5 x 84	13.5 x 84	17.5 x 84	17.5 x 84	17 x 80	17 x 80
vessels per rotor	120	80	80	68	80	80	68	68	68	80	80	68	68	48	48
Cat. No.	4730	4732	4732	4733	4732	4732	4733	4733	4733	4732	4732	4733	4733	4739⁴⁾	4739

Vessels


capacity in ml	50	12	25	30	50	10	30	50	85	94
Ø x L in mm	29 x 115	17 x 100	25 x 90	25 x 110	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	38 x 102
max. RCF ²⁾	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,495
radius in mm	196	196	196	196	196	196	196	196	196	190
Cat. No.	tubes with screw cap									

Adapter

boring Ø x L in mm	30 x 80	17 x 80	26.5 x 84	26.5 x 84	30 x 80	17.5 x 84	26.5 x 84	30 x 80	42 x 80	42 x 80
vessels per rotor	20	48	24	24	20	68	24	20	12	12
Cat. No.	4740	4739⁴⁾	4734	4734	4740	4733	4734	4740	4736	4736

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Please remove the spacer.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

SWING-OUT ROTOR, 4-PLACE | 5699-R

																
Rotor		Bucket with clamp lock		Bucket without clamp lock ¹⁴⁾												
max. RPM max. RCF ²⁾		4,600 min ⁻¹ 4,779		lid bioseal ⁹⁾		4883										
max. capacity		4x750 ml		Cat. No.		4880										
run-up run-down, braked in sec		90 95														
angle temperature in °C ¹⁾		90° +7														
Cat. No.		5699-R				4885										
Vessels																
capacity in ml																
Ø x L in mm	11x38	11x38	10x60	10x88	12x60	12x75	12x82	12x100	17x100	24x100	31x100	34x100	38x102	40x115	44x100	
max. RCF ²⁾	3,572	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,637	4,495	4,495	4,495	4,495	4,637	
radius in mm	151	196	196	196	196	196	196	196	196	196	190	190	190	190	196	
Cat. No.	microliter tubes			tubes²⁾												
Adapter																
boring Ø x L in mm																
vessels per rotor	192	192	96	96	76	76	76	76	76	28	16	16	12	12	8	
Cat. No.	4830	4830	4830	4830	4832	4832	4832	4832	4832	4833	4834	4835	4835	4836	4837	
Vessels																
capacity in ml																
Ø x L in mm	65 x 100	8 x 66	13 x 65	13 x 65	11 x 66	15 x 75	11 x 92	13 x 90	13 x 90	15 x 92	16 x 92	16 x 92	13 x 90	13 x 75	13 x 75	
max. RCF ²⁾	4,495	4,637	4,116	4,637	4,637	4,637	4,637	4,637	4,684	4,637	4,684	4,637	4,637	4,116	4,637	
radius in mm	190	196	174	196	196	196	196	196	198	196	198	196	196	174	196	
Cat. No.	-²⁾	blood collection / urine vessels														
Adapter																
boring Ø x L in mm																
vessels per rotor	4	96	108	76	76	76	76	76	108	76	88	76	76	108	76	
Cat. No.	4838	4830	4847	4832	4832	4833	4832	4832	4847⁴⁾	4833	4848	4833	4833	4847	4832	
Vessels																
capacity in ml																
Ø x L in mm	13x100	13x100	16x75	16x75	16 x 125	16x100	16x100	17 x 59	16.5x106	17x120	29 x 115	29 x 115	17x100	25x90	25x110	
max. RCF ²⁾	4,684	4,637	4,637	4,684	4,637	4,637	4,684	4,637	4,637	4,637	4,708	4,637	4,637	4,566	4,566	
radius in mm	198	196	196	198	196	196	198	196	196	196	199	196	196	193	193	
Cat. No.	blood collection / urine vessels								-	tubes with screw cap						
Adapter																
boring Ø x L in mm																
vessels per rotor	108	76	76	88	76	76	88	56	56	56	28	20	56	28	28	
Cat. No.	4847⁴⁾	4832	4833	4848	4833	4833	4848	4839	4839⁴⁾	4839	5647	4840	4839⁴⁾	4834	4834	

SWING-OUT ROTOR, 4-PLACE | 5699-R



Rotor

max. RPM max. RCF	4,600 min ⁻¹ 4,779
max. capacity	4 x 750 ml
run-up run-down, braked in sec	90 95
angle	90°
temperature in °C ¹⁾	+7
Cat. No.	5699-R

Bucket with clamp lock

lid bioseal ⁵⁾	4883
Cat. No.	4880

Bucket without clamp lock¹⁴⁾

Cat. No.	4885
-----------------	-------------



Vessels

capacity in ml	50	50	10	10	30	50	50	85	94	250	290	500	600	650	750
Ø x L in mm	29 x 115	29 x 115	16 x 80	16 x 80	26 x 95	29 x 107	29 x 107	38 x 106	38 x 102	61 x 122	62 x 137	96 x 147	93 x 134	97 x 139	97 x 152
max. RCF ²⁾	4,708	4,637	4,637	4,684	4,637	4,637	4,708	4,495	4,495	4,779	4,779	4,779	4,779	4,779	4,779
radius in mm	199	196	196	198	196	196	199	190	190	202	202	202	202	202	202
Cat. No.	tubes with screw cap									5127 ²⁴⁾	- ²⁴⁾	Corning®	0551 ²⁴⁾	0554 ²⁴⁾	0512 ²⁴⁾



Adapter

boring Ø x L in mm	30 x 96.5	30 x 80	17.5 x 84	17.5 x 61	26.5 x 84	30 x 80	30 x 96.5	42 x 80	42 x 80	62 x 100	62 x 100	98 x 100	94 x 95	98 x 100	98 x 100
vessels per rotor	28	20	76	88	28	20	28	12	12	4	4	4	4	4	4
Cat. No.	5647⁴⁾	4840⁴⁾	4833	4848	4834	4840⁴⁾	5647⁴⁾	4836	4836	4841	4841	4845	4846	4845	4845

Vessels

capacity in ml	450	750	30	50	40	160	200	200	200
Ø x L in mm	97 x 110	93 x 135	-	-	-	-	-	-	-
max. RCF ²⁾	4,779	4,779	4,613 ²⁷⁾	4,613 ²⁷⁾	4,613 ²⁷⁾	4,613 ²⁷⁾	4,613 ²⁷⁾	4,613 ²⁷⁾	4,613 ²⁷⁾
radius in mm	202	202	195	195	195	195	195	195	195
Cat. No.	4447	4234-A	Falcon®	Corning®	Nunc®	Nunc®	Falcon®	Greiner®	Nunc®





Adapter


boring Ø x L in mm	98 x 100	98 x 100	-	-	-	-	-	-	-
vessels per rotor	4	4	8	8	4	8	4	4	4
Cat. No.	4845	4845	4849	4849	4852	4851	4831	4831	4831


- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.8) When using these tubes, bucket 4880 cannot be closed with lid 4883.
- 3.9) When using these tubes, bucket 4890 cannot be closed with lid 4883.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 14) With the E3905 add-on kit and the 4783 lid, the 4785 carrier can be converted at a later time to a 4780 carrier with single-hand clamp lock.
- 21) Adapter must be loaded as illustrated.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.
- 27) RCF values indicated refer only to rotor performance. The max. RCF for the accommodated cell culture flasks is 2,300.
- 28) We recommend the use of the refrigerated ROTANTA 460 R, 460 RC, or 460 RF to ensure that the temperature of the blood is maintained during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 5699-R


Rotor				Bucket with clamp lock					
max. RPM max. RCF ²⁾		4,600 min ⁻¹ 5,063		lid bioseal ⁵⁾		4883			
max. capacity		4x750 ml		Cat. No.		4890			
run-up run-down, braked in sec		90 95							
angle		90°							
temperature in °C ¹⁾		+7		Bucket without clamp lock ¹⁴⁾					
Cat. No.		5699-R		Cat. No.		4895			

Vessels															
capacity in ml		1.5 2.0 5 7 8 9 15 25 50 100 2.6–3.4 2.7–3 4–5.5 4.5–5 4.9													
Ø x L in mm		11 x 38 11 x 38 12 x 75 12 x 100 16 x 81 14 x 100 17 x 100 24 x 100 34 x 100 44 x 100 13 x 65 11 x 66 15 x 75 11 x 92 13 x 90													
max. RCF ²⁾		3,407 / 4,542 3,407 / 4,542 4,471 4,471 4,637 4,637 4,637 4,353 4,424 4,400 4,471 4,471 4,637 4,471 4,471													
radius in mm		144 / 192 144 / 192 189 189 196 196 196 184 187 186 189 189 196 189 189													
Cat. No.		microliter tubes		tubes ²⁾						blood collection / urine vessels					

Adapter															
boring Ø x L in mm		11.5 x 38 11.5 x 38 13 x 58 13 x 58 17.5 x 53 17.5 x 53 17.5 x 53 26 x 72 36 x 79 45 x 78 13.5 x 58 13 x 58 17.5 x 53 13 x 58 13.5 x 58													
vessels per rotor		168 168 120 120 76 76 76 28 16 8 84 120 76 120 84													
Cat. No.		4432 4432 4433 4433 4434 4434 4434 4438 4439 4442 4435 4433 4434 4433 4435													

Vessels															
capacity in ml		7.5–8.5 9–10 10 1.6–5 4–7 4–7 8 8.5–10 10 15 50 25 30 50 50													
Ø x L in mm		15 x 92 16 x 92 15 x 102 13 x 75 13 x 100 16 x 75 16 x 125 16 x 100 16 x 80 17 x 120 29 x 115 25 x 90 25 x 110 29 x 115 29 x 107													
max. RCF ²⁾		4,637 4,637 4,637 4,471 4,471 4,637 4,637 4,637 4,637 4,755 4,613 4,566 4,566 4,613 4,613													
radius in mm		196 196 196 189 189 196 196 196 196 201 195 193 193 195 195													
Cat. No.		blood collection / urine vessels									tubes with screw cap				

Adapter															
boring Ø x L in mm		17.5 x 53 17.5 x 53 17.5 x 53 13.5 x 58 13.5 x 58 17.5 x 53 17.5 x 53 17.5 x 53 17.5 x 53 17 x 93.1 31 x 96 26 x 72 26 x 72 31 x 96 31 x 96													
vessels per rotor		76 76 76 84 84 76 76 76 76 56 28 28 28 28 28													
Cat. No.		4434 4434 4434 4435 4435 4434 4434 4434 4434 4469 4468 4438 4438 4468 ⁴⁾ 4468													

Vessels															
capacity in ml		250 290 650 750 175 175 200 225 250 500 450 750 450													
Ø x L in mm		61 x 122 62 x 137 97 x 139 97 x 152 61 x 118 62 x 144 60 x 130 61 x 137 60 x 162 96 x 147 97 x 110 93 x 135 3-place-system without filter													
max. RCF ²⁾		4,873 4,873 4,873 4,873 5,063 5,063 5,063 5,063 5,063 5,063 5,063 5,063 5,063													
radius in mm		206 206 206 206 214 214 214 214 214 214 214 214 214													
Cat. No.		5127 ²⁴⁾ - ²⁴⁾ 0554 ²⁴⁾ 0512 ²⁴⁾ Falcon® Nalgene® Nunc® Falcon® Corning® Corning® 4447 4234-A blood bags ²⁸⁾													

Adapter															
boring Ø x L in mm		62 x 92 62 x 92 98.4 x 116 98.4 x 116 - - - - - - 98.4 x 116 98.4 x 116 -													
vessels per rotor		4 4 4 4 4 4 4 4 4 4 4 4 4 4													
Cat. No.		4443 4443 4451 4451 4440 4430 4430 4440 4430 4449 4451 4451 -													

SWING-OUT ROTOR, 4-PLACE | 5699-R

	
Rotor	
max. RPM max. RCF ²⁾	4,600 min ⁻¹ 4,637
max. capacity	4 x 450 ml
run-up run-down, braked in sec	90 95
angle temperature in °C ¹⁾	90° +10
Cat. No.	5699-R



Bucket

Cat. No.



5691-A



		holder for systems without filter	holder for systems with and without filter
			
Blood bags			
capacity in ml	450	450	
blood bag	3-place-System	4-place-System	
max. RCF ²⁾	4,637	4,637	
radius in mm	196	196	
Cat. No.	5693	5695	



Insert

			
boring Ø x L in mm	-	-	
blood bags per rotor	4	4	
Cat. No.	5692	5692	

SWING-OUT ROTOR, 4-PLACE | 5699-R

	
Rotor	
max. RPM max. RCF ²⁾	4,600 min ⁻¹ 4,921
max. capacity	12 Arrays
run-up run-down, braked in sec	90 95
angle temperature in °C ¹⁾	90° +10
Cat. No.	5699-R




Bucket

Cat. No.



5636



		TaqMan Array
		
Array		
capacity in ml	-	
W x D x H in mm	152.5x85.5x12	
max. RCF ²⁾	4,921	
radius in mm	208	
Cat. No.	-	



Adapter

		
boring Ø x L in mm	-	
arrays per rotor	12	
Cat. No.	5648	

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.


SWING-OUT ROTOR, 4-PLACE | 5699-R



	
Rotor	
max. RPM max. RCF ²⁾	4,600 min ⁻¹ 4,258
max. capacity	4 x 250 ml
run-up run-down, braked in sec	90 95
angle temperature in °C ¹⁾	90° +10
Cat. No.	5699-R



	
Bucket	
Cat. No.	5628 ⁹⁾
	
Adapter	
Cat. No.	5220-A



	
Vessels	
capacity in ml	1.5 2.0 3 5 6 7 9 25 50 100 100 250 1.1–1.4 2.6–3.4 2.7–3
Ø x L in mm	11 x 38 11 x 38 10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 24 x 100 34 x 100 44 x 100 44 x 115 65 x 115 8 x 66 13 x 65 11 x 66
max. RCF ²⁾	4,164 4,164 4,069 4,164 4,164 4,164 4,116 4,093 4,093 4,069 4,069 4,045 4,069 4,164 4,116
radius in mm	176 176 172 176 176 176 174 173 173 172 172 171 172 176 174
Cat. No.	microliter tubes tubes²⁾ blood collection / urine vessels
	+ 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A
	
Adapter	
boring Ø x L in mm	11.5 x 50 11.5 x 50 11 x 44 13.5 x 52 13.5 x 52 13.5 x 52 16 x 50 26 x 86 36 x 86 45.5 x 86 42 x 86 66 x 87 11 x 44 13.5 x 52 12.5 x 42
vessels per rotor	128 128 160 96 96 96 96 40 16 8 8 4 160 96 160
Cat. No.¹⁹⁾	5281 5281 5267 5268 5268 5268 5264 5242 5243 5262 5249 5263-A 5267 5268 5227

	
Vessels	
capacity in ml	4–5.5 4.5–5 4.9 7.5–8.5 9–10 1.6–5 4–7 4–7 8.5–10 15 30 50 50 250
Ø x L in mm	15 x 75 11 x 92 13 x 90 15 x 92 16 x 92 13 x 75 16 x 75 13 x 100 16 x 100 17 x 120 25 x 110 29 x 115 29 x 115 61 x 122
max. RCF ²⁾	4,116 4,116 4,164 4,116 4,093 4,164 4,116 4,164 4,093 4,258 4,187 4,258 4,187 3,196
radius in mm	174 174 176 174 173 176 174 176 173 180 177 180 177 177
Cat. No.	blood collection / urine vessels tubes with screw cap 5127²⁴⁾
	+ 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 6319
	
Adapter	
boring Ø x L in mm	16 x 50 12.5 x 42 13.5 x 52 16 x 50 17.6 x 86 13.5 x 52 16 x 50 13.5 x 52 17.7 x 86 17 x 90 26 x 86 30 x 90 30 x 87 66 x 87
vessels per rotor	96 160 96 96 88 96 96 96 88 56 40 24 24 4
Cat. No.¹⁹⁾	5264 5227 5268 5264 5258 5268 5264 5268 5258 6337-B 5266⁴⁾ 6338-B 6339-A 5263-A⁴⁾

	
Vessels	
capacity in ml	1–8
Ø x L in mm	simple / multiple
max. RCF ²⁾	2,744 / 4,069
radius in mm	116 / 172
Cat. No.	cyto chambers



	
Adapter	
boring Ø x L in mm	-
vessels per rotor	16
Cat. No.¹⁹⁾	5280

CYTO

Cyto system available for this model.
More information on [page 178](#)

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Please remove the spacer.
- Max. permissible loading weight of carrier 5628: 800 g. The loading weight is the sum of the weight of the respective adapters, frames, the tubes and their contents.
- Two adapters can be placed on each bucket.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 5699-R

Rotor		Bucket	
max. RPM max. RCF	4,600 min ⁻¹ 3,785	Cat. No.	5630-B
max. capacity	4 x 200 ml		
run-up run-down, braked in sec	90 95		
angle temperature in °C ¹⁾	90° +10		
Cat. No.	5699-R		



Vessels					
capacity in ml	40	160	200	200	200
Ø x L in mm	-	-	-	-	-
max. RCF ²⁾	3,785 ²⁾	3,785 ²⁾	3,785 ²⁾	3,785 ²⁾	3,785 ²⁾
radius in mm	160	160	160	160	160
Cat. No.	Nunc®	Nunc®	Falcon®	Greiner®	Nunc®
Adapter					
boring Ø x L in mm	-	-	-	-	-
vessels per rotor	4	4	4	4	4
Cat. No.	5672	5673	5671	5671	5671

Accommodated cell culture flask:

40 ml
Nunc®, No. 156340 or 156367

160 ml
Nunc®, No. 156472 or 156499
Sarstedt®, No. 83.3911.xxx

200 ml
Becton Dickinson®, No. 353024
Greiner®, No. 658170
Nunc®, No. 153732 or 147589

SWING-OUT ROTOR, 4-PLACE | 5699-R

Rotor		Bucket	
max. RPM max. RCF	4,600 min ⁻¹ 3,832	Cat. No.	5630-B
max. capacity	20 plates		
run-up run-down, braked in sec	90 95		
angle temperature in °C ¹⁾	90° +10		
Cat. No.	5699-R		



Plates									
W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	84x59x11	124x82x20	-
capacity in ml	-	-	-	-	-	-	-	-	0.2
max. RCF ²⁾	3,832	3,832	3,832	3,832	3,832	3,832	3,832	3,832	3,832
radius in mm	max. 162	max. 162	max. 162	max. 162	max. 162	max. 162	max. 162	max. 162	max. 162
Cat. No.	MTP	MTP	CP	DWP	MS	QP	Microtest plate	PCR plate	PCR strips
Removal frame									
boring Ø x L in mm	-	-	-	-	-	-	-	-	-
plates / strips per rotor	20	16	12	4	4	4	8	4	48 x 8
Cat. No.	4626	4626	4626	4626	4626	4626	4626	4626 + 1485	4626 + 1485

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

27) RCF values indicated refer only to rotor performance. The max. RCF for the accommodated cell culture flasks is 2,300.

SWING-OUT ROTOR, 4-PLACE | 5699-R

	
Rotor	
max. RPM max. RCF	4,600 min ⁻¹ 4,211
max. capacity	24 plates
run-up run-down, braked in sec	90 95
angle temperature in °C ¹⁾	90° +10
Cat. No.	5699-R



	
Bucket	
lid bioseal ⁵⁾	5629
Cat. No.	5628 ⁹⁾



Plates									
W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	84x59x11	124x82x20	-
capacity in ml	-	-	-	-	-	-	-	-	0.2
max. RCF ²⁾	4,211	4,211	4,211	4,211	4,211	4,211	4,211	4,211	4,211
radius in mm	max. 178	max. 178	max. 178	max. 178	max. 178	max. 178	max. 178	max. 178	max. 178
Cat. No.	MTP	MTP	CP	DWP	MS	QP	Microtest plate	PCR plate	PCR strips
Removal frame									
boring Ø x L in mm	-	-	-	-	-	-	-	-	-
plates / strips per rotor	24	20	16	4	4	4	8	4	48 x 8
Cat. No.	4626	4626	4626	4626	4626	4626	4626	4626 + 1485	4626 + 1485

SWING-OUT ROTOR, 4-PLACE | 5654

	
Rotor	
max. RPM max. RCF	3,800 min ⁻¹ 2,890
max. capacity	24 plates
run-up run-down, braked in sec	61 57
angle max. noise level	90° 57 dB (A)
temperature in °C ¹⁾	-4
Cat. No.	5654



	
Bucket	
lid bioseal ⁵⁾	5629
Cat. No.	5653



Plates									
W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	84x59x11	124x82x20	-
capacity in ml	-	-	-	-	-	-	-	-	0.2
max. RCF ²⁾	2,890	2,890	2,890	2,890	2,890	2,890	2,890	2,890	2,890
radius in mm	max. 179	max. 179	max. 179	max. 179	max. 179	max. 179	max. 179	max. 179	max. 179
Cat. No.	MTP	MTP	CP	DWP	MS	QP	Microtest plate	PCR plate	PCR strips
Removal frame									
boring Ø x L in mm	-	-	-	-	-	-	-	-	-
plates / strips per rotor	24	20	16	4	4	4	8	4	48 x 8
Cat. No.	4626	4626	4626	4626	4626	4626	4626	4626 + 1485	4626 + 1485

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.
- RCF values indicated refer only to rotor performance. The max. RCF for the accommodated cell culture flasks is 2,300.

SWING-OUT ROTOR, 4-PLACE | 5654




Rotor

max. RPM max. RCF	3,800 min ⁻¹ 3,196
max. capacity	4 x 1,000 ml
run-up run-down, braked in sec	61 57
angle max. noise level	90° 58 dB (A)
temperature in °C ¹⁾	+3
Cat. No.	5654

Bucket

lid bioseal ⁵⁾	5652
Cat. No.	5651-A



Vessels

capacity in ml	3	4	4	5	6	7	10	10	15	1.1–1.4	2.6–3.4	2.7–3	4.5–5	4–5.5	4.9
Ø x L in mm	10 x 60	10 x 88	12 x 60	12 x 75	12 x 82	12 x 100	13 x 100	13 x 100	17 x 100	8 x 66	13 x 65	11 x 66	11 x 92	15 x 75	13 x 90
max. RCF ²⁾	2,874	2,874	2,874	2,874	2,874	2,874	2,906	2,906	2,970	2,874	2,906	2,874	2,874	2,970	2,906
radius in mm	178	178	178	178	178	178	180	180	184	178	180	178	178	184	180
Cat. No.	tubes²⁾									blood collection / urine vessels					

Adapter

boring Ø x L in mm	12.5 x 40	12.5 x 40	12.5 x 40	12.5 x 40	12.5 x 40	12.5 x 40	13.2 x 42.4	13.2 x 42.4	17.2 x 46.5	12.5 x 40	13.2 x 42.4	12.5 x 40	12.5 x 40	17.2 x 46.5	13.2 x 42.4
vessels per rotor	292	292	292	292	292	292	196	188	148	292	196	292	292	148	196
Cat. No.	5684	5684	5684	5684	5684	5684	5674	5685	5682	5684	5674	5684	5684	5682	5674

Vessels

capacity in ml	7.5–8.5	9–10	10	1.6–5	4–7	4–7	4–7	8.5–10	10	5	15	50	175	175	200
Ø x L in mm	15 x 92	16 x 92	15 x 102	13 x 75	16 x 75	13 x 100	13 x 100	16 x 100	16 x 80	17 x 59	17 x 120	29 x 115	61 x 118	62 x 144	60 x 130
max. RCF ²⁾	2,970	2,970	2,970	2,906	2,970	2,906	2,906	2,970	2,970	3,196	3,196	3,196	3,196	3,196	3,196
radius in mm	184	184	184	180	184	180	180	184	184	198	198	198	198	198	198
Cat. No.	blood collection / urine vessels									-	tubes with screw cap	Falcon®	Nalgene®	Nunc®	

Adapter

boring Ø x L in mm	17.2 x 46.5	17.2 x 46.5	17.2 x 46.5	13.2 x 42.4	17.2 x 46.5	13.2 x 42.4	13.2 x 42.4	17.2 x 46.5	17.2 x 46.5	17 x 42	17 x 60	30 x 60	62 x 100	62 x 100	62 x 100
vessels per rotor	148	148	148	196	148	196	188	148	148	80	96	40	8	8	8
Cat. No.	5682	5682	5682	5674	5682	5674	5685	5682	5682	5688	5683	5686	5681	5681	5681

Vessels

capacity in ml	225	250	290	450	500	600	650	750	1,000
Ø x L in mm	61 x 137	61 x 122	62 x 137	97 x 110	96 x 147	93 x 134	97 x 139	97 x 152	99/126 x 140
max. RCF ²⁾	3,196	3,196	3,196	3,196	3,196	3,196	3,196	3,196	3,196
radius in mm	198	198	198	198	198	198	198	198	198
Cat. No.	Falcon®	5127²⁴⁾	-²⁴⁾	4447	Corning®	0551²⁴⁾	0554²⁴⁾	0512²⁴⁾	-

Adapter

boring Ø x L in mm	62 x 100	62 x 100	62 x 100	98 x 100	98 x 100	98 x 100	98 x 100	98 x 100	100/127 x 68
vessels per rotor	8	8	8	4	4	4	4	4	4
Cat. No.	5681	5681	5681	5687	5687	5687	5687	5687	5669

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 10) When using this tubes, bucket 5651-A cannot be closed with lid 5652.
- Tested by TÜV in conformity with DIN EN 61010, section 2 - 020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6-PLACE | 4446




Rotor

max. RPM max. RCF	4,000 min ⁻¹ 3,631
max. capacity	6 x 100 ml
run-up run-down, braked in sec	45 55
angle max. noise level	90° 58 dB (A)
temperature in °C ¹⁾	-3
Cat. No.	4446



Bucket

lid	5053
Cat. No.	5051



Vessels

capacity in ml	1.5	2	1.5	2	3	5	6	7	9	15	25	50	100	100
Ø x L in mm	11 x 38	11 x 38	11 x 38	11 x 38	10 x 60	12 x 75	12 x 82	12 x 100	14 x 100	17 x 100	24 x 100	34 x 100	44 x 100	40 x 115
max. RCF ²⁾	2,486 / 3,363	2,486 / 3,363	3,363	3,363	3,274	3,309	3,309	3,291	3,309	3,291	3,291	3,291	3,291	3,291
radius in mm	139 / 188	139 / 188	188	188	183	185	185	184	185	184	184	184	184	184
Cat. No.	microliter tubes				tubes ²⁾									



Adapter

boring Ø x L in mm	12.5 x 42	12.5 x 42	11.5 x 50	11.5 x 50	11 x 44	12.5 x 42	12.5 x 42	12.5 x 86	16 x 50	17.5 x 86	26 x 86	36 x 86	45.5 x 86	42 x 86
vessels per rotor	240	240	96	96	120	120	120	120	72	72	30	12	6	6
Cat. No.	5257	5257	5281	5281	5267	5227	5227	5247 ¹⁵⁾	5264	5248 ¹⁵⁾	5242	5243	5262	5249

Vessels

capacity in ml	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10
Ø x L in mm	8 x 66	13 x 65	11 x 66	15 x 75	11 x 92	13 x 90	15 x 92	16 x 92	15 x 102	13 x 75	13 x 100	16 x 75	16 x 100
max. RCF ²⁾	3,274	3,345	3,309	3,309	3,309	3,345	3,309	3,291	3,291	3,345	3,345	3,309	3,291
radius in mm	183	187	185	185	185	187	185	184	184	187	187	185	184
Cat. No.	blood collection / urine vessels												



Adapter

boring Ø x L in mm	11 x 44	13.5 x 52	12.5 x 42	16 x 50	12.5 x 42	13.5 x 52	16 x 50	17.6 x 86	17.6 x 86	13.5 x 52	13.5 x 52	16 x 50	17.5 x 86
vessels per rotor	120	72	120	72	120	72	72	66	66	72	72	72	72
Cat. No.	5267	5268	5227	5264	5227	5268	5264	5258	5258	5268	5268	5264	5248

Vessels

capacity in ml	15	30	50	12	30	50	1–8
Ø x L in mm	17 x 120	25 x 110	29 x 115	17 x 100	25 x 110	29 x 115	simple / multiple
max. RCF ²⁾	3,434	3,291	3,291	3,434	3,291	3,291	2,290 / 3,291
radius in mm	192	184	184	192	184	184	128 / 184
Cat. No.	tubes with screw cap						cyto chambers



Adapter

boring Ø x L in mm	17 x 90	26 x 86	30 x 86	17 x 90	26 x 86	36 x 86	-
vessels per rotor	42	30	12	42	30	12	12
Cat. No.	6306	5266	5259	6306	5266	5243	5280

CYTO

Cyto system available for this model.
More information on [page 178](#)

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 5051 cannot be closed with lid 5053.
- With Cat. No. 5247-91 or 5248-91 these adapters can also be ordered with a decanting aid.

SWING-OUT ROTOR, 6-PLACE | 4446



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 3,631
max. capacity	6 x 290 ml
run-up run-down, braked in sec	45 55
angle temperature in °C ¹⁾	90° -3
Cat. No.	4446



Bucket

lid bioseal ⁵⁾	5093
Cat. No.	5092



Vessels

capacity in ml	5	6	7	15	25	50	100	100	250	1.1–1.4	1.1–1.4	2.6–3.4	2.6–3.4	2.7–3	2.7–3
Ø x L in mm	12x75	12x82	12x100	17x100	24x100	34x100	44x100	40x115	65x115	8 x 66	8 x 66	13 x 65	13 x 65	11x66	11x66
max. RCF ²⁾	3,542	3,542	3,542	3,488	3,434	3,488	3,488	3,488	3,631	3,488	3,077	3,488	3,077	3,488	3,077
radius in mm	198	198	198	195	192	195	195	195	203	195	172	195	172	195	172
Cat. No.	tubes²⁾									blood collection tubes / urine tubes					



Adapter

boring Ø x L in mm	12.8x45	12.8x45	13.2x82	17.5x60.7	25.5x82	35.5x82.5	45.5x85	42x85	66x103	13.5x60.7	13.2x54.5	13.5x60.7	13.2x54.5	13.5x60.7	13.2x54.5
vessels per rotor	72	72	72	48	24	6	6	6	6	48	72	48	72	48	72
Cat. No.	5128	5128	5120	5136	5122	5124	5125	5126	1791	5137	5138	5137	5138	5137	5138

Vessels

capacity in ml	4.9	4–5.5	4.5–5	7.5–8.5	9–10	10	1.6–5	1.6–5	4–7	4–7	8	8.5–10	10	15	30
Ø x L in mm	13x90	15x75	11x92	15x92	16x92	15x102	13x75	13x75	16x75	13x100	16x125	16x100	16 x 80	17x120	25 x 110
max. RCF ²⁾	3,488	3,488	3,542	3,488	3,488	3,488	3,488	3,077	3,488	3,542	3,542	3,488	3,488	3,631	3,434
radius in mm	195	195	198	195	195	195	195	172	195	198	198	195	195	203	192
Cat. No.	blood collection tubes / urine tubes											tubes with screw cap			



Adapter

boring Ø x L in mm	13.5x60.7	17.5x60.7	13.2x82	17.5x60.7	17.5x60.7	17.5x60.7	13.5x60.7	13.2x54.5	12.8x60.7	13.2x82	17.5 x 82	17.5x60.7	17.5x60.7	17 x 85	25.5 x 92
vessels per rotor	48	48	72	48	48	48	48	72	48	72	42	48	48	42	24
Cat. No.	5137	5136	5120	5136	5136	5136	5137	5138	5136	5120	5121	5136	5136	5129	5122

Vessels

capacity in ml	50	50	12	25	30	250	290
Ø x L in mm	29x115	29x115	17x100	25x90	25x110	61 x 122	62 x 137
max. RCF ²⁾	3,631	3,560	3,542	3,363	3,434	3,631	3,631
radius in mm	203	199	198	188	192	203	203
Cat. No.	tubes with screw cap					5127²⁴⁾	-²⁴⁾




Adapter


boring Ø x L in mm	30x85	30x99	17.5x82	26x73	25.5x82	66x103	66x103
vessels per rotor	12	12	42	18	24	6	6
Cat. No.	5123	5135	5121	5134	5122	6319	6319

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 5092 cannot be closed with lid 5053.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 2-PLACE | 5622

Rotor		
max. RPM	ROTANTA 460 460 R	5,900 min ⁻¹ 6,200 min ⁻¹
max. RCF		5,838 6,446
max. capacity		12 plates
run-up run-down, braked in sec		50 52 32 39
angle temperature in °C ¹⁾		90° +10
Cat. No.		5622



Bucket		
lid bioseal ⁵⁾		4627
Cat. No.		5631



Plates										
W x D x H in mm		128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	84x59x11	124x82x20	-
capacity in ml		-	-	-	-	-	-	-	-	0.2
max. RCF ²⁾	ROTANTA 460 460 R	5,838 6,446	5,838 6,446	5,838 6,446	5,838 6,446	5,838 6,446	5,838 6,446	5,838 6,446	5,838 6,446	5,838 6,446
radius in mm		150	150	150	150	150	150	150	150	150
Cat. No.		MTP	MTP	CP	DWP	MS	QP	Microtest plate	PCR plate 96 wells	PCR strips
Removal frame										
boring Ø x L in mm		-	-	-	-	-	-	-	-	-
vessels per rotor		12	10	8	2	2	2	4	2	24 x 8
Cat. No.		4626	4626	4626	4626	4626	4626	4626	4626 + 1485	4626 + 1485

SWING-OUT ROTOR, 4-PLACE | 4474

Rotor		
max. RPM max. RCF		2,000 min ⁻¹ 984
max. capacity		4 x 100 ml
run-up run-down, braked in sec		17 20
angle max. noise level		90° 46 dB (A)
temperature in °C ¹⁾		-8
Cat. No.		4474



Bucket		
Cat. No.		4275



Vessels						
capacity in ml		50	100	100	100	50
Ø x L in mm		45 x 130	58 x 161	44 x 168	37 x 200	36.5 x 185
max. RCF ²⁾		984	984	961	961	912
radius in mm		220	220	215	215	204
Cat. No.		ASTM^{2.1)}	ASTM 0528^{2.1)}	ASTM^{2.1)}	ASTM 0531^{2.1)}	Babcock
Adapter						
boring Ø x L in mm		-	-	-	-	-
vessels per rotor		4	4	4	4	4
Cat. No.		4278-A	0771	4277	4276-B	0703-A

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2.1) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of vessels used should be verified with the individual manufacturers. The max. RCF for ASTM Tubes annotated with footnote 2) is 700.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

ANGLE ROTOR, 30-PLACE | 4489-A

					
Rotor			+	Lid bioseal[®] and phenol-resistant	
max. RPM max. RCF		15,000 min ⁻¹ 24,400		Cat. No.	INCLUSIVE
max. capacity		30 x 2 ml			
run-up run-down, braked in sec		73 77			
angle temperature in °C ¹⁾		45° +4			
Cat. No.		4489-A			



								
Vessels								
capacity in ml		0.2	0.4	0.5	0.8	1.5	2	0.5
Ø x L in mm		6x18	6x45	8x30	8x45	11x38	11x38	10.7x36
max. RCF ²⁾		24,400	24,400	24,400	24,400	24,400	24,400	23,394
radius in mm		97	97	97	97	97	97	93
Cat. No.		microliter tubes						Pediatric

								
Adapter								
boring Ø x L in mm		6x40	6x40	8x40	8x40	10.2x19.3	11.2x40.1	11.2x40.1
vessels per rotor		30	30	30	30	30	30	15
Cat. No.		2024	2024	2023	2023	2031⁷⁾	-	0788

ANGLE ROTOR, 6-PLACE | 5645

					
Rotor			+	Lid bioseal[®]	
max. RPM ROTANTA 460 460 R		8,500 min ⁻¹ 9,500 min ⁻¹		Cat. No.	INCLUSIVE
max. RCF		11,228 14,025			
max. capacity		6 x 250 ml			
run-up run-down, braked in sec		98 115 105 120			
angle temperature in °C ¹⁾		25° +7			
Cat. No.		5645			




												
Vessels												
capacity in ml		15	25	94	15	50	10	30	50	85	94	250
Ø x L in mm		17x100	24x100	38x102	17x120	29x115	16x80	26x95	29x107	38 x 106	38 x 102	61x122
max. RCF ²⁾ ROTANTA 460		10,662	10,339	9,855	10,339	9,693	10,743	10,339	9,693	9,855	9,855	11,228
max. RCF ²⁾ ROTANTA 460 R		13,319	12,915	12,310	12,915	12,108	13,420	12,915	12,108	12,310	12,310	14,025
radius in mm		132	128	122	128	120	133	128	120	122	122	139
Cat. No.		tubes²⁾			tubes with screw cap							5127²⁴⁾
												
Adapter												
boring Ø x L in mm		17.6 x 83	26x80	38.6x88	17x106	30x100	16.6x70	26x80	29x90	38.6 x 88	38.6 x 88	61.5x109
vessels per rotor		42	18	6	30	6	48	18	6	6	6	6
Cat. No.		5646	5642	5644	5637	5638	5641	5642	5643	5644	5644	-

ANGLE ROTOR, 6-PLACE | 5615

Rotor	
max. RPM max. RCF	11,500 min ⁻¹ 18,038
max. capacity	6 x 94 ml
run-up run-down, braked in sec	66 68
angle temperature in °C ¹⁾	45° +6
Cat. No.	5615


Lid bioseal ⁵⁾

Cat. No.


INCLUSIVE


Vessels															
capacity in ml	0.5	1.5	2.0	3	15	25	50	94	7.5 – 8.5	9 – 10	10	8.5 – 10	5	15	50
Ø x L in mm	10.7x36	11x38	11x38	10x60	17x100	24x100	34x100	38x102	15x92	16x92	15x102	16x100	17x59	17x120	29x115
max. RCF ²⁾	17,299	17,299	17,299	17,299	17,003	16,560	17,743	18,038	17,003	17,003	17,003	17,003	16,856	17,299	17,595
radius in mm	117	117	117	117	115	112	120	122	115	115	115	115	114	117	119
Cat. No.	Pediatric	microliter tubes			tubes ²⁾				blood collection / urine tubes				-	tubes with screw cap	
Adapter															
boring Ø x L in mm	11.4x39	11.4x39	11.4x39	11.4x39	17.5x92	26x85	35x89	38.2x89.6	17.5x92	17.5x92	17.5x92	17.5x92	17x51	17x106	29.8x97
vessels per rotor	24	24	24	24	6	6	6	6	6	6	6	6	6	6	6
Cat. No.	1449	1449	1449	1449	1451	1447	1463	-	1451	1451	1451	1451	1476	1466	1454

Vessels					
capacity in ml	10	30	50	85	94
Ø x L in mm	16x80	26x95	29x107	38 x 106	38 x 102
max. RCF ²⁾	17,003	16,560	17,299	18,038	18,038
radius in mm	115	112	117	122	122
Cat. No.	tubes with screw cap				

Adapter					
boring Ø x L in mm	16.5x74	26x85	29x92	38.2x 89.6	38.2x 89.6
vessels per rotor	12	6	6	6	6
Cat. No.	1448	1447	1446	-	-

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use form-fitting, phenol-resistant adapters. Cat. No. 2031.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

PACKAGES ROTANTA 460 | 460 R

ROTANTA 460 CONICAL PACKAGE 1		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 centrifuge	5650	56	15	17 x 120	4,600	4,637
- 1 x swing-out rotor, 4-place	5654	28	50	29 x 115	4,600	4,708
- 4 x bucket	5651-A					
- 4 x adapter, 24-place (conical)	5683					
- 4 x adapter, 10-place (conical)	5686					
5650SET1						



ROTANTA 460 CONICAL PACKAGE 2		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 centrifuge	5650	56	15	17 x 120	4,600	4,637
- 1 x swing-out rotor, 4-place	5699-R	28	50	29 x 115	4,600	4,708
- 4 x bucket	4885					
- 4 x adapter, 14-place (conical)	4839					
- 4 x adapter, 7-place (conical)	5647					
5650SET2						



ROTANTA 460 R CONICAL PACKAGE 1		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 R centrifuge	5660	56	15	17 x 120	4,600	4,755
- 1 x swing-out rotor, 4-place	5699-R	28	50	29 x 115	4,600	4,613
- 4 x bucket	4890					
- 4 x lid (bioseal)	4883					
- 4 x adapter, 7-place (conical)	4468					
- 4 x adapter, 14-place (conical)	4469					
5660SET1						



ROTANTA 460 R CONICAL PACKAGE 2		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 R centrifuge	5660	56	15	17 x 120	4,600	4,637
- 1 x swing-out rotor, 4-place	5654	28	50	29 x 115	4,600	4,708
- 4 x bucket	5651-A					
- 4 x adapter, 24-place (conical)	5683					
- 4 x adapter, 10-place (conical)	5686					
5660SET2						



ROTANTA 460 R CONICAL PACKAGE 3		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 R centrifuge	5660	56	15	17 x 120	4,600	4,637
- 1 x swing-out rotor, 4-place	5699-R	28	50	29 x 115	4,600	4,708
- 4 x bucket	4885					
- 4 x adapter, 14-place (conical)	4839					
- 4 x adapter, 7-place (conical)	5647					
5660SET3						



ROTANTA 460 R BLOOD TUBES PACKAGE 4		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 R centrifuge	5660	188	4-10	13 x 100	3,800	2,906
- 1 x swing-out rotor, 4-place	5654	148	4.5-15	17 x 100	3,800	2,970
- 4 x bucket	5651-A					
- 4 x lid (bioseal)	5652					
- 4 x adapter, 47-place	5685					
- 4 x adapter, 37-place	5682					
5660SET4						



ROTANTA 460 R BLOOD TUBES PACKAGE 5		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 R centrifuge	5660	108	2.6 -7	13 x 100	4,600	4,684
- 1 x swing-out rotor, 4-place	5699-R	88	4 - 10	16 x 100	4,600	4,684
- 4 x bucket	4880					
- 4 x lid (bioseal)	4883					
- 4 x adapter, 27-place	4847					
- 4 x adapter, 22-place	4848					
5660SET5						



PACKAGES ROTANTA 460 RF

ROTANTA 460 RF CONICAL PACKAGE 1		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 RF centrifuge	5675	56	15	17 x 120	4,600	4,637
- 1 x swing-out rotor, 4-place	5654	28	50	29 x 115	4,600	4,708
- 4 x bucket	5651-A					
- 4 x adapter, 24-place (conical)	5683					
- 4 x adapter, 10-place (conical)	5686					
5675SET1						



ROTANTA 460 RF CONICAL PACKAGE 2		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 RF centrifuge	5675	56	15	17 x 120	4,600	4,637
- 1 x swing-out rotor, 4-place	5699-R	28	50	29 x 115	4,600	4,708
- 4 x bucket	4885					
- 4 x adapter, 14-place (conical)	4839					
- 4 x adapter, 7-place (conical)	5647					
5675SET2						



ROTANTA 460 RF BLOOD TUBE PACKAGE 3		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 RF centrifuge	5675	188	4-10	13 x 100	3,800	2,906
- 1 x swing-out rotor, 4-place	5654	148	4.5-15	17 x 100	3,800	2,970
- 4 x bucket	5651-A					
- 4 x lid (bioseal)	5652					
- 4 x adapter, 47-place	5685					
- 4 x adapter, 37-place	5682					
5675SET3						



ROTANTA 460 RF BLOOD TUBE PACKAGE 4		number of vessels	volume (ml)	size (mm)	RPM	RCF
- 1 x ROTANTA 460 RF centrifuge	5675	108	2.6 -7	13 x 100	4,600	4,684
- 1 x swing-out rotor, 4-place	5699-R	88	4 - 10	16 x 100	4,600	4,684
- 4 x bucket	4880					
- 4 x lid (bioseal)	4883					
- 4 x adapter, 27-place	4847					
- 4 x adapter, 22-place	4848					
5675SET4						



ROTOFIX 46 | 46 H

Robust industrial unit

These are ideal centrifuges for research and industrial laboratories. They are robust and can withstand intensive usage, in the field. Specialty buckets are able to hold ASTM pear-shaped and conical tubes for petroleum testing. Heated option provides chamber temperature up to +90 °C (ROTOFIX 46 H).

— FEATURES

- Max. RPM: 4,000 min⁻¹ | 2.000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 3,095 | 984
- Max. capacity: 4 x 290 ml | 4 x 100 ml
- Robust and versatile benchtop centrifuge
- Choice of 4 rotors
- Maximum noise level of ≤ 58 dB(A)
- Impulse button for short centrifugation
- Easy operation with keypad
- Model 46 H heatable from +10 to +90 °C

— FIELDS OF APPLICATION

- Petrochemical laboratories
- Automobile industry
- Chemical laboratories



More information about the control panel can be found on [page 198](#)



TECHNICAL DATA

	ROTOFIX 46 non-refrigerated	ROTOFIX 46 H heated
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~
frequency	50 – 60 Hz	50 – 60 Hz
consumption	460 VA	600 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	4 x 290 ml	4 x 100 ml
max. RPM	4,000 min ⁻¹	2,000 min ⁻¹
max. RCF	3,095	984
running time	1 – 99 min : 59 sec, ∞ continuous run, short cycle mode (impulse button)	1 – 99 min : 59 sec, ∞ continuous run, short cycle mode (impulse button)
dimesions (WxDxH)	538x647x345 mm	538x647x345 mm
weight	approx. 60 kg	approx. 60 kg
noise level	50 dB (A) with rotor 4619	38 dB (A) with rotor 4619
temperature setting, infinitely variable (dependent on the ambient temperature)	-	from +10 to +90 °C
Cat. No.	4600	4600-50
100 – 127 V 1 ~ / 50 – 60 Hz *)	4600-01	4600-51
consumption	500 VA	650 VA
emission, immunity	FCC class B	FCC class B

*) Other voltages on request.

AVAILABLE ROTORS


SWING-OUT ROTORS

	angle	max. RPM	max. capacity	Cat. No.	page
 swing-out rotor, 6-place	90°	2,000 min ⁻¹	6x30 ml	4619	130
 swing-out rotor, 4-place	90°	2,000 min ⁻¹	4x100 ml	4474	131
 swing-out rotor, 4-place	90°	4,000 min ⁻¹	4x290 ml	5694	131

ANGLE ROTOR


 angle rotor, 6-place	45°	2,000 min ⁻¹	6x50 ml	5616	130
--	-----	-------------------------	---------	-------------	-----

ANGLE ROTOR, 6-PLACE | 5616



Rotor

max. RPM max. RCF	2,000 min ⁻¹ 805
max. capacity	6 x 50 ml
run-up run-down, braked in sec	15 35
angle max. noise level	45° 38 dB (A)
Cat. No.	5616³⁰⁾



Tubes

capacity in ml	25	50
Ø x L in mm	24x146.5	38x148.5
max. RCF ^{2,1)}	783	805
radius in mm	175	180
Cat. No.	0532	0533



Adapter

boring Ø x L in mm	25 x 86	38.5x89.9
tubes per rotor	6	6
Cat. No.	4317	-




SWING-OUT ROTOR, 6-PLACE | 4619



Rotor

max. RPM max. RCF	2,000 min ⁻¹ 917
max. capacity	6 x 30 ml
run-up run-down, braked in sec	15 20
angle max. noise level	90° 38 dB (A)
Cat. No.	4619³⁰⁾



Tubes

capacity in ml	30	30
Ø x L in mm	24 x 151	24 x 151
max. RCF ^{2,1)}	917	917
radius in mm	206	206
Cat. No.	0529	0508⁹⁾



Adapter

boring Ø x L in mm	-	-
tubes per rotor	6	6
Cat. No.	-	-



- 2 Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 2.1) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of vessels used should be verified with the individual manufacturers. The max. RCF for ASTM Tubes annotated with footnote 2) is 700.
- 3.11) When using these tubes, bucket 5051 cannot be closed with lid 5053.
- 4) Please remove the spacer.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.
- 15) Also available with decanting aid. (Cat. No. 5247-91 or 5248-91).
- 30) In the heatable models 5660-50, 5660-51, 5660-70, 5670-50 and 5675-50, rotor 4619 may only be used up to a maximum of +40 °C.

— SWING-OUT ROTOR, 4-PLACE | 4474


		+		
Rotor				
max. RPM max. RCF	2,000 min ⁻¹ 984			
max. capacity	4 x 100 ml			
run-up run-down, braked in sec	16 40			
angle max. noise level	90° 58 dB (A)			
Cat. No.	4474		Bucket	
		Cat. No.	4275	




	
capacity in ml	50 100 100 100 50
Ø x L in mm	45 x 130 58 x 161 44 x 168 37 x 200 36.5 x 185
max. RCF ^{2,1)}	984 984 961 961 912
radius in mm	220 220 215 215 204
Cat. No.	ASTM^{2,1)} 0528^{2,1)} ASTM^{2,1)} 0531^{2,1)} Babcock

+			
Adapter			
boring Ø x L in mm	-		
tubes per rotor	4		
Cat. No.	4278-A 0771 4277 4276-B 0703-A		


— SWING-OUT ROTOR, 4-PLACE | 5694 (NOT FOR 46 H)

		+		
Rotor			Bucket	
max. RPM max. RCF	4,000 min ⁻¹ 3,095		lid	5053
max. capacity	4 x 100 ml		Cat. No.	5051
run-up run-down, braked in sec	40 45			
angle max. noise level	90° 58 dB (A)			
Cat. No.	5694			



	
capacity in ml	3 5 6 7 9 15 25 50 100 100 15 50 12 30 50
Ø x L in mm	10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 24 x 100 34 x 100 44 x 100 40 x 115 17 x 120 29 x 115 17 x 100 25 x 110 29 x 115
max. RCF ²⁾	2,737 2,773 2,773 2,755 2,773 2,755 2,755 2,755 2,755 2,755 2,898 2,826 2,898 2,755 2,755
radius in mm	153 155 155 154 155 154 154 154 154 154 162 158 162 154 154
Cat. No.	tubes²⁾ tubes with screw cap
+	
	
boring Ø x L in mm	11 x 44 12.5 x 42 12.5 x 42 12.5 x 86 16 x 50 17.5 x 86 26 x 86 36 x 86 45.5 x 86 42 x 86 17 x 90 30 x 86 17 x 90 26 x 86 36 x 86
tubes per rotor	80 80 80 80 48 48 20 8 4 4 28 8 28 20 8
Cat. No.	5267 5227 5227 5247¹⁵⁾ 5264 5248¹⁵⁾ 5242 5243 5262 5249 6306 5259 6306 5266 5243⁴⁾


SWING-OUT ROTOR, 4-PLACE | 5694 (NOT FOR 46 H)



	
Rotor	
max. RPM max. RCF ²⁾	4,000 min ⁻¹ 3,095
max. capacity	4 x 290 ml
run-up run-down, braked in sec	40 45
angle max. noise level	90° 58 dB (A)
Cat. No.	5694



	
Bucket	
lid bioseal ⁵⁾	5093
Cat. No.	5092



	
Tubes	
capacity in ml	4 5 6 7 15 25 50 100 100 250 15 50 12 25 30
Ø x L in mm	12x60 12x75 12x82 12x100 17x100 24x100 34x100 44x100 40x115 65x115 17x120 29x115 17x100 25x90 25x110
max. RCF ²⁾	3,005 3,005 3,005 3,005 2,952 2,898 2,952 2,952 2,952 3,095 3,095 3,095 3,005 2,826 2,898
radius in mm	168 168 168 168 165 162 165 165 165 173 173 173 168 158 162
Cat. No.	tubes²⁾ tubes with screw cap
	
Adapter	
boring Ø x L in mm	12.8x45 12.8x45 12.8x45 13.2x82 17.5x60.7 25.5x82 35.5x82.5 45.5x85 42x85 66x103 17x85 30x85 17.5x82 26x73 25.5x82
tubes per rotor	48 48 48 48 32 16 4 4 4 4 28 8 28 12 16
Cat. No.	5128 5128 5128 5120 5136 5122 5124 5125 5126 1791 5129 5123 5121 5134 5122

	
Tubes	
capacity in ml	50 10 250 290
Ø x L in mm	29 x 115 16 x 80 61 x 122 62 x 137
max. RCF ²⁾	3,023 2,952 3,095 3,095
radius in mm	169 165 173 173
Cat. No.	tubes with screw cap 5127²⁴⁾ -²⁴⁾
	
Adapter	
boring Ø x L in mm	30x99 17.5x60.7 66x103 66x103
tubes per rotor	8 32 4 4
Cat. No.	5135 5136 6319 6319

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

DID YOU KNOW?

The Download Center on our website allows you to access the most up to date documents including catalogs, brochures, data sheets and certificates.

Try it now: www.hettichlab.com/downloadcenter



FLOORSTANDING CENTRIFUGES

High performance, throughput and capacity




ROTANTA 460 RC | 460 RF
on page 136



ROTIXA 500 RS
on page 138



ROTO SILENTA 630 RS
on page 150

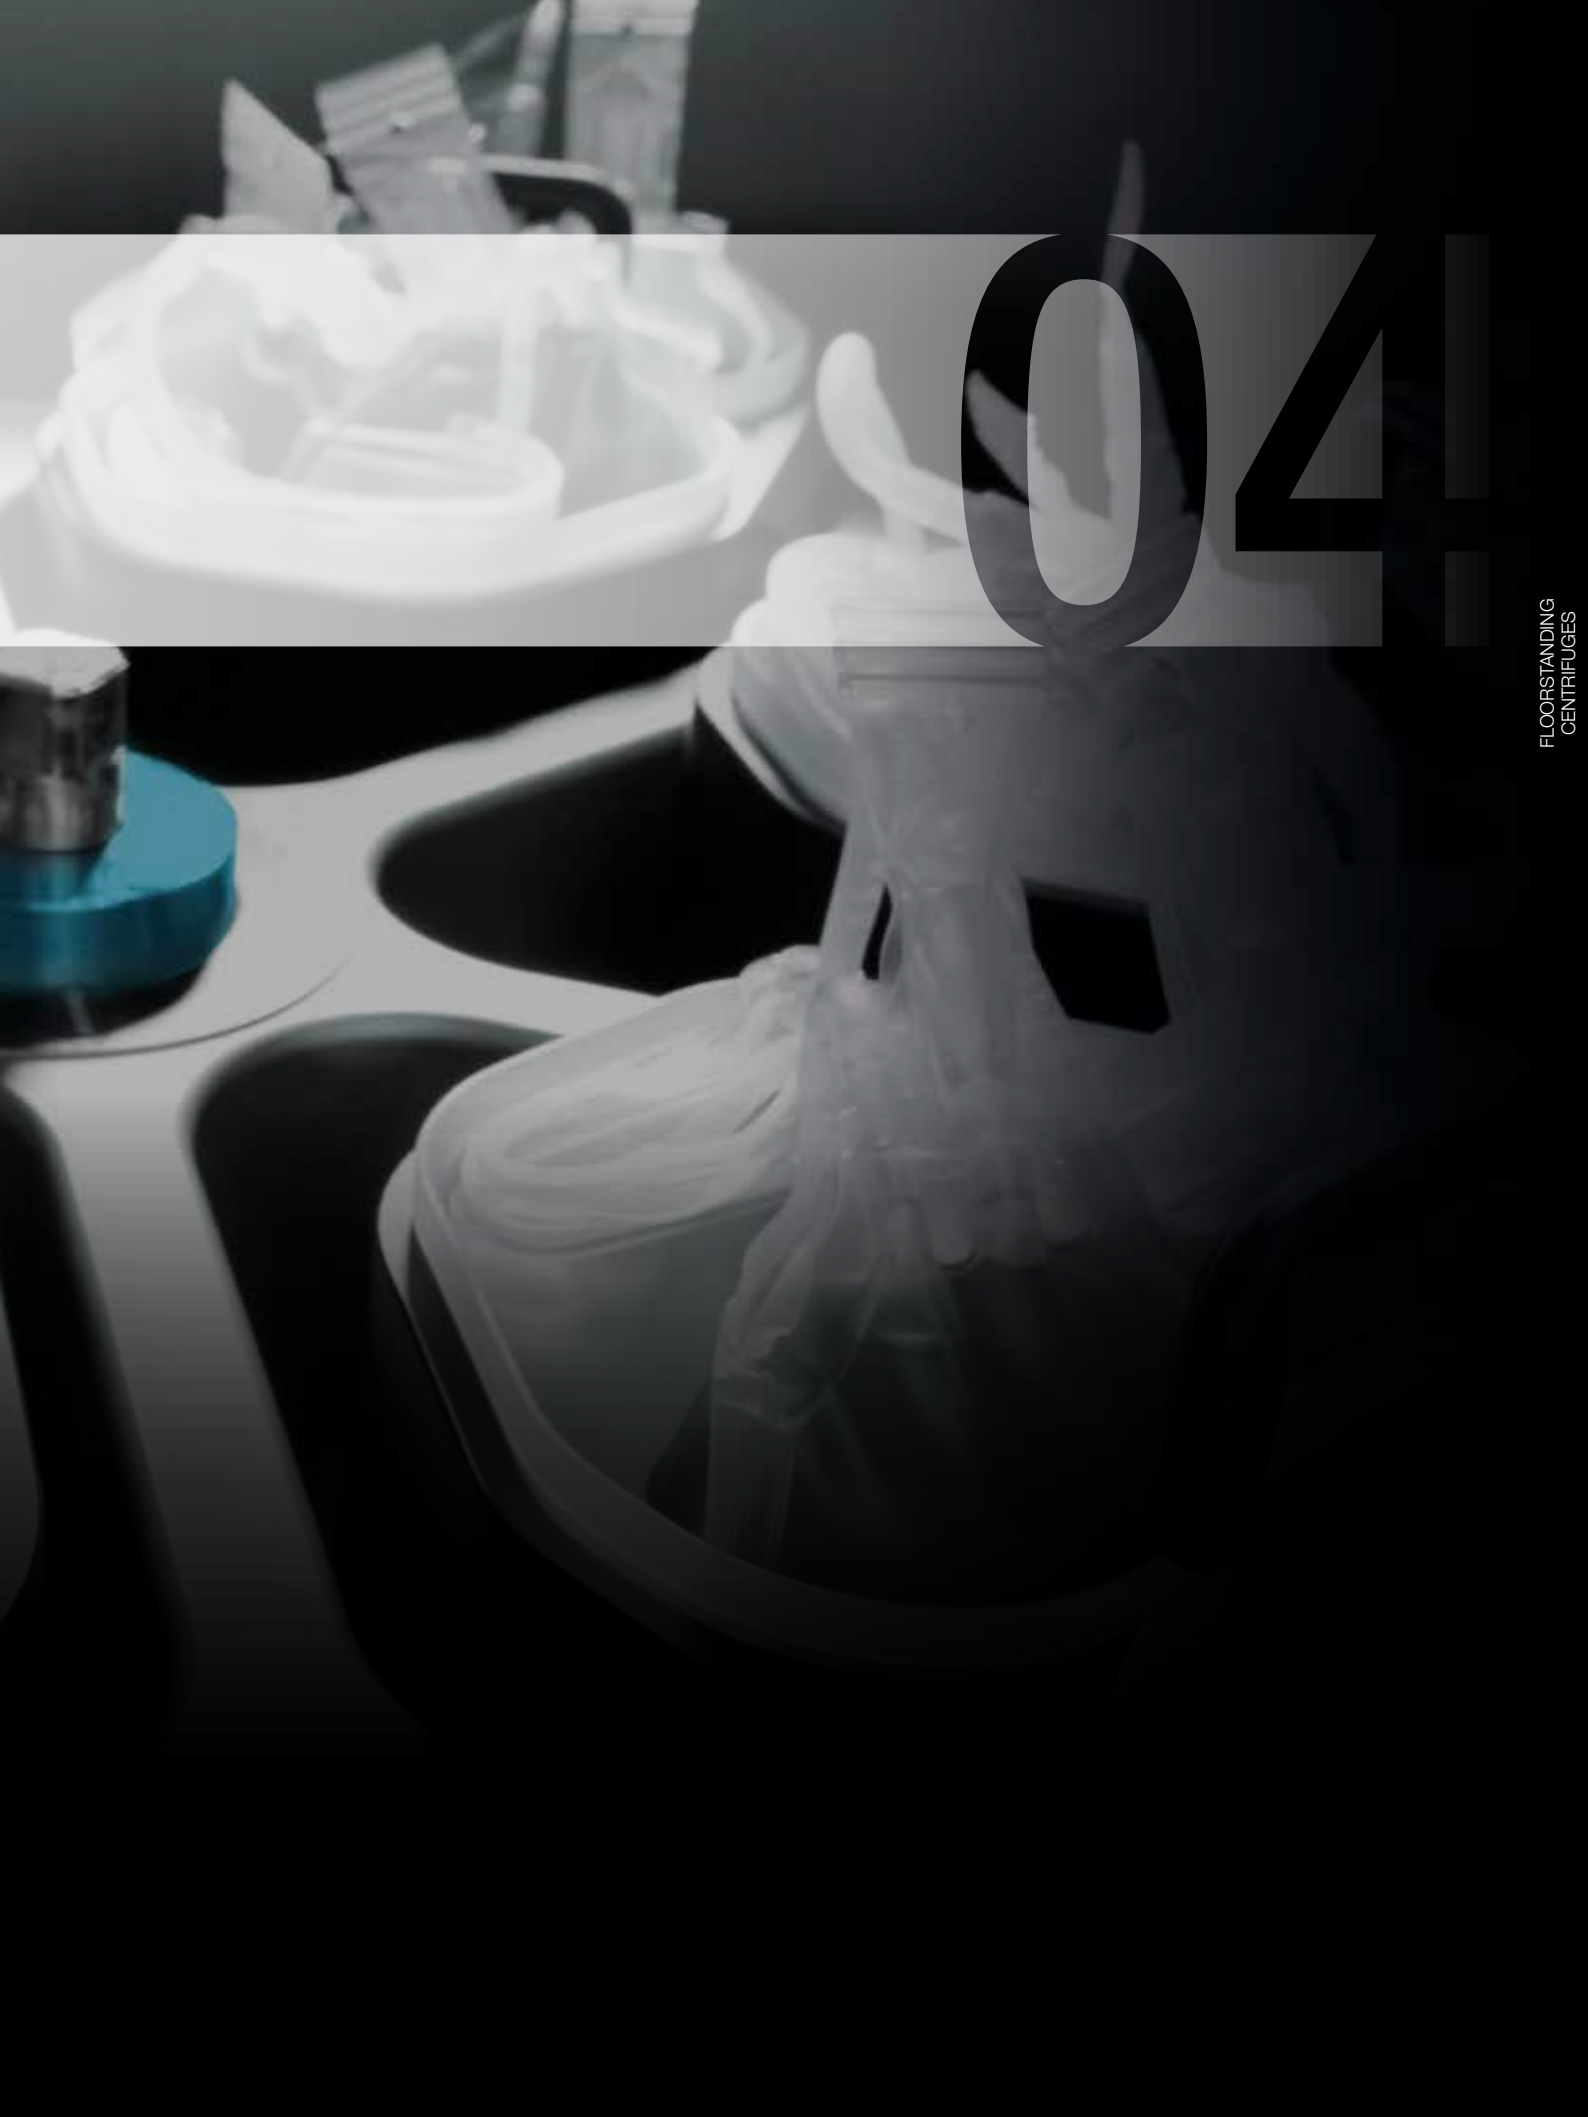

04!

ROTANTA 460 RC | 460 RF

The capability of a benchtop without the footprint

This modified version of the standard ROTANTA 460 allows for space saving storage below the bench and frees valuable working space on the benchtop. Both units include refrigeration with a temperature range from -20 °C to +40 °C.

— FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 1 - 24,400 – adjustable in increments of 1
- Available in two versions as a floor-standing unit or under-bench model
- Max. capacity: 4 x 1,000 ml
- Choice of 8 rotors
- Medical Device according to directive 93/42/EC
- 28 individual acceleration and deceleration stages
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- Refrigerated from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Hematological laboratories
- Small blood centers
- Veterinary laboratories
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Oil laboratories
- Chemical industry
- Forensic laboratories



Centrifuge packages for the model can be found on [page 127](#)



Cyto system available for this model. More information on [page 178](#)



More information about the control panel can be found on [page 198](#)



ROTANTA 460 RC

ROTANTA 460 RF

TECHNICAL DATA

	ROTANTA 460 RC refrigerated	ROTANTA 460 RF refrigerated
voltage *)	200 – 240 V 1 ~	200 – 240 V 1 ~
frequency	50 Hz	50 Hz
consumption	1,800 VA	2,000 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	4 x 750 ml	4 x 750 ml
max. RPM	15,000 min ⁻¹	15,000 min ⁻¹
max. RCF	24,400	24,400
running time	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode
dimensions (WxDxH)	554x697x683 mm	554x697x961 mm
weight	approx. 140 kg	approx. 164 kg
noise level	60 dB (A) with rotor 4474	60 dB (A) with rotor 4474
temperature control, infinitely variable	from -20 to +40 °C	from -20 to +40 °C
Cat. No.	5670	5675
100 – 127 V 1 ~ / 60 Hz ¹⁾	-	5675-01
emission, immunity	-	FCC class B
weight	-	approx. 174 kg

*) Other voltages on request.

AVAILABLE ROTORS (identical to the ROTANTA 460 | 460 R)

SWING-OUT ROTORS		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 4-place	90°	4,600 min ⁻¹	4x750 ml	5699-R	112
	swing-out rotor, 4-place	90°	3,800 min ⁻¹	4x750 ml	5654	119
	swing-out rotor, 6-place	90°	4,000 min ⁻¹	6x290 ml	4446	121
	swing-out rotor, 4-place	90°	2,000 min ⁻¹	4x100 ml	4474	123
	swing-out rotor, 2-place	90°	5,900 min ⁻¹ / 6,200 min ⁻¹	12 plates	5622	123
ANGLE ROTORS						
	angle rotor, 30-place	45°	15,000 min ⁻¹	30x2 ml	4489-A	124
	angle rotor, 6-place	25°	8,500 min ⁻¹ / 9,500 min ⁻¹	6x250 ml	5645	124
	angle rotor, 6-place	45°	11,500 min ⁻¹	6x94 ml	5615	125

ROTIXA 500 RS

Small footprint – high volumes

Its durable components make the ROTIXA 500 RS a reliable unit with a long service life. High sample capacity and maximum RCF of 18,038 make it suitable for 4 x 450-1,000 ml blood bags. Specially designed buckets keep blood bags upright during centrifugation for improved separation of blood components.

In industrial research labs, it accommodates 4 bottles up to 1,000 ml, specialty racks, as well as containers and vessels for various applications. This unit includes refrigeration with a temperature range from -20°C to +40°C.

— FEATURES

- RPM: 50 - 11,500 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 18,038 – adjustable in increments of 1
- Max. capacity: 4 x 1,000 ml
- Choice of 5 rotors
- Medical Device according to directive 93/42/EC
- Easy operation with keypad and control knob
- 89 program memories for more individuality
- 19 individual acceleration and deceleration stages

— FIELDS OF APPLICATION

- Hospitals
- Hematology laboratories
- Blood centers
- Veterinary laboratories
- Clinical laboratories
- Environmental analyzing laboratories
- University / Academic research
- Automobile industry
- Chemical industry
- Dairy industry



Documentation system for blood banks.
More information on [page 160](#)

CYTO

Cyto system available for this model.
More information on [page 178](#)



More information about the control panel
can be found on [page 198](#)



TECHNICAL DATA

ROTIXA 500 RS ^{>)} refrigerated

voltage ^{*)}	230 – 240 V 1 ~	220 V 1 ~
frequency	50 Hz	60 Hz
consumption	3,800 VA	
emission, immunity	EN/IEC 61326-1, class B	
max. capacity	4 x 1,000 ml	
max. RPM	11,500 min ⁻¹	
max. RCF	18,038	
running time	1 – 999 min: 59 s, ∞ continuous run	
dimensions (WxDxH)	650x814x973 mm	
weight	approx. 219 kg	
noise level	58 dB (A) with rotor 4282	
temperature control, infinitely variable	from -20 to +40 °C	
Cat. No.	4950	

^{*)} Other voltages on request.

^{>)} Other models models on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 4-place	90°	4,500 min ⁻¹	4 x 1,000 ml	4294	140
	swing-out rotor, 6-place	90°	4,000 min ⁻¹	6 x 250 ml	4296	145
	swing-out rotor, 2-place	90°	3,600 min ⁻¹	20 plates	4282	147

ANGLE ROTORS

	angle rotor, 6-place	25°	9,500 min ⁻¹	6 x 250 ml	4266	148
	angle rotor, 6-place	45°	11,500 min ⁻¹	6 x 94 ml	4246	149

SWING-OUT ROTOR, 4-PLACE | 4294

Rotor

max. RPM max. RCF ²⁾	4,500 min ⁻¹ 4,958
max. capacity	4 x 750 ml
run-up run-down, braked in sec	115 116
angle temperature in °C ¹⁾	90° +6
Cat. No.	4294

Bucket

lid	4229-B
Cat. No.	4295-A

Tubes

capacity in ml	0.8	1.5	2.0	4	5	6	7	9	12	15	25	50	94	100
Ø x L in mm	8x45	11x38	11x38	10x88	12x75	12x82	12x100	14x100	16x101	17x100	24x100	34x100	38x102	40x115
max. RCF ²⁾	4,777	3,690	4,867	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777
radius in mm	211	163	215	211	211	211	211	211	211	211	211	211	211	211
Cat. No.	microliter tubes			tubes²⁾										

Adapter

boring Ø x L in mm	8.2x36	11.2x46	11.2x46	11x74	12.5x36	12.5x74	12.5x74	16 x 74	16 x 74	17.5x74	26x74	35x74	41.5x74	41.5x74
tubes per rotor	312	336	336	252	192	192	192	100	100	120	44	24	16	16
Cat. No.	4226	4225	4225	4224	4213-93	4213	4213	4223	4223	4214	4215	4216	4218	4218

Tubes

capacity in ml	2.6–3.4	2.7–3	4–5.5	4.5–5	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8	8.5–10	15	50
Ø x L in mm	13 x 65	11x66	15x75	11x92	15x92	16x92	15x102	13 x 75	13 x 100	16x75	16x125	16x100	17x120	29x115
max. RCF ²⁾	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,777	4,958	4,958
radius in mm	211	211	211	211	211	211	211	211	211	211	211	211	219	219
Cat. No.	blood collection / urine tubes												tubes with screw cap	

Adapter

boring Ø x L in mm	13.2x36	12.5x36	17.5x36	12.5x74	17.5x74	17.5x74	17.5x74	13.2x36	13.2x74	17.5x36	16x74	17.5x74	17x70	30x70
tubes per rotor	120	192	120	192	120	64	120	120	120	120	100	120	92	32
Cat. No.	4222-93	4213-93	4214-93	4213	4214	4220	4214	4222-93	4222	4214-93	4223	4214	4232	4245-A

Tubes


capacity in ml	12	30	50	100	100	250	290	600	650	750	750	250	500
Ø x L in mm	17x100	25x110	29x115	40x115	40x115	61 x 122	62 x 137	93 x 137	97 x 139	97 x 152	96 x 135	60 x 162	96 x 147
max. RCF ²⁾	4,777	4,777	4,867	4,777	4,777	4,777	4,777	4,958	4,958	4,958	4,958	4,777	4,958
radius in mm	211	211	215	211	211	211	211	219	219	219	219	211	219
Cat. No.	tubes with screw cap					5127²⁴⁾	-²⁴⁾	0551²⁴⁾	0554²⁴⁾	0512²⁴⁾	4234-A	Corning®	Corning® +4449

Adapter


boring Ø x L in mm	17.5x74	26 x 74	30 x 96	41.5 x 74	41.5 x 74	62 x 90	62 x 90	94 x 105	97.5x105	97.5x105	97.5x105	61 x 125	97.5x105
tubes per rotor	64	44	24	16	16	4	4	4	4	4	4	4	4
Cat. No.	4220	4215	4249	4218	4218	4238	4238	4233	4258	4258	4258	6322	4258


SWING-OUT ROTOR, 4-PLACE | 4294

	
Rotor	
max. RPM max. RCF ²⁾	4.500 min ⁻¹ 4.618
max. capacity	40 x 50 ml
run-up run-down, braked in sec	115 116
angle	90°
temperature in °C ¹⁾	+2
Cat. No.	4294


	
Bucket	
lid bioseal ³⁾	4291
Cat. No.	4290



	
Tubes	
capacity in ml	5 6 7 9 12 2.6–3.4 4.9 4–5.5 7.5–8.5 9–10 10 1.6–5 4–7 4–7 8.5–10
Ø x L in mm	12x75 12x82 12x100 14x100 16x101 13x65 13x90 15x75 15x92 16x92 15x102 13x75 13x100 16x75 16x100
max. RCF ²⁾	4,551 4,551 4,551 4,551 4,551 4,551 4,551 4,551 4,551 4,573 4,573 4,551 4,551 4,551 4,551
radius in mm	201 201 201 201 201 201 201 201 201 202 202 201 201 201 201
Cat. No.	tubes²⁾ blood collection / urine tubes

	
Adapter	
boring Ø x L in mm	13.2x57 13.2x57 13.2x57 17.5x62 17.5x62 13.2x57 13.2x57 17.5x62 17.5x62 17.5x63 17.5x63 13.2x57 13.2x57 17.5x62 17.5x62
tubes per rotor	200 200 200 168 168 200 200 168 168 132 132 200 200 168 168
Cat. No.	4273 4273 4273 4338 4338 4273 4273 4338 4338 4311 4311 4273 4273 4338 4338

	
Tubes	
capacity in ml	15 10 12 15 15 50 50 50 50
Ø x L in mm	17x100 16x80 17x100 17x120 17x120 29x115 29x115 29x115 29x115
max. RCF ²⁾	4,551 4,551 4,437 4,618 4,618 4,618 4,618 4,528 4,528
radius in mm	201 201 196 204 204 204 204 200 200
Cat. No.	- 2) tubes with screw cap

	
Adapter	
boring Ø x L in mm	17.5x62 17.5x62 17.2x57 17x60 17x60 30x60 30x60 30x56 30x56
tubes per rotor	168 168 112 68 112 32 40 32 40
Cat. No.	4338 4338 4310 4314 4320 4321 4323 4313 4339

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

3.12) When using these tubes, bucket 4290 cannot be closed with lid 4291.

3.13) When using these tubes, bucket 4295-A cannot be closed with lid 4229-B.

24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

— SWING-OUT ROTOR, 4-PLACE | 4294




Rotor


max. RPM max. RCF ²⁾	4,500 min ⁻¹ 4,573
max. capacity	24 plates
run-up run-down, braked in sec	115 116
angle temperature in °C ¹⁾	90° +5
Cat. No.	4294



Bucket



lid bioseal ⁵⁾	5629
Cat. No.	4280



Plates

W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	128x86x83	124x82x20	-
capacity in ml	-	-	-	-	-	-	-	0.2
max. RCF ²⁾	4,573	4,573	4,573	4,573	4,573	4,573	4,573	4,573
radius in mm	202	202	202	202	202	202	202	202
Cat. No.	MTP	MTP	CP	DWP	MS	QP	PCR plates	PCR strips



Removal aid

[illegible]

— SWING-OUT ROTOR, 4-PLACE | 4294




Rotor

max. RPM max. RCF ²⁾	4,500 min ⁻¹ 4,867
max. capacity	20 Racks
run-up run-down, braked in sec	115 116
angle temperature in °C ¹⁾	90° +7
Cat. No.	4294



Bucket

Cat. No. 4257

Rack



W x D x H in mm	118 x 20 x 70
capacity in ml	-
max. RCF ²⁾	4,867
radius in mm	215
Cat. No.	Hitachi Rack



Removal aid



boring Ø x L in mm	-
tubes per rotor	20
Cat. No.	4259-A ²³⁾

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 23) When using removal frame 4259-A, please take the spacer out of carrier 4257.

SWING-OUT ROTOR, 4-PLACE | 4294



Rotor

max. RPM max. RCF ²⁾	4,500 min ⁻¹ 5,184
max. capacity	4 x 1,000 ml
run-up run-down, braked in sec	115 116
angle temperature in °C ¹⁾	90° +5
Cat. No.	4294



Bucket

adapter including lid	4255
Cat. No.	4254



Tubes

capacity in ml	5	7	9	15	25	50	100	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	10
Ø x L in mm	12x75	12x100	14x100	17x100	24x100	34x100	44x100	13 x 65	11x66	15x75	11x92	13x90	15x92	16x92	15x102
max. RCF ²⁾	4,618	4,618	4,777	4,777	4,505	4,573	4,551	4,618	4,618	4,777	4,618	4,618	4,777	4,777	4,777
radius in mm	204	204	211	211	199	202	201	204	204	211	204	204	211	211	211
Cat. No.	tubes²⁾							blood collection / urine tubes							



Adapter

boring Ø x L in mm	13 x 58	13 x 58	17.5 x 53	17.5 x 53	26 x 72	36 x 79	45 x 78	13.5 x 58	13 x 58	17.5 x 53	13 x 58	13.5 x 58	17.5 x 53	17.5 x 53	17.5 x 53
tubes per rotor	120	120	76	76	28	16	8	84	120	76	120	84	76	76	76
Cat. No.	4433	4433	4434	4434	4438	4439	4442	4435	4433	4434	4433	4435	4434	4434	4434

Tubes

capacity in ml	1.6–5	4–7	4–7	8	8.5–10	15	30	50	25	30	10	250	290	650	750
Ø x L in mm	13x75	13x100	16x75	16x125	16x100	17x120	25 x 110	29x115	25x90	25 x 110	16 x 80	61 x 122	62 x 137	97 x 139	97 x 152
max. RCF ²⁾	4,618	4,618	4,777	4,777	4,777	4,890	4,709	4,890	4,709	4,709	4,777	5,003	5,003	5,184	5,184
radius in mm	204	204	211	211	211	216	208	216	208	208	211	221	221	229	229
Cat. No.	blood collection / urine tubes				tubes with screw cap							5127²⁴⁾	-²⁴⁾	0554²⁴⁾	0512²⁴⁾



Adapter

boring Ø x L in mm	13.5 x 58	13.5 x 58	17.5 x 53	17.5 x 53	17.5 x 53	17 x 88	26 x 72	30 x 87	26 x 72	26 x 72	17.5 x 53	62 x 92	62 x 92	98 x 138	98 x 138
tubes per rotor	84	84	76	76	76	48	28	20	28	28	76	4	4	4	4
Cat. No.	4435	4435	4434	4434	4434	4437	4438	4441	4438	4438	4434	4443	4443	-	-

Tubes

capacity in ml	1,000	1,000	175	175	200	225	250	500
Ø x L in mm	96 x 176	98 x 138	61 x 118	61.5x144	60 x 130	61 x 137	60 x 162	96 x 147
max. RCF ²⁾	5,184	5,184	5,184	5,184	5,184	5,184	5,184	5,184
radius in mm	229	229	229	229	229	229	229	229
Cat. No.	4239²⁴⁾	4255	Falcon	Nalgene	Nunc®	Falcon	Corning®	Corning®



Adapter

boring Ø x L in mm	98 x 138	-	-	-	-	-	-	-
tubes per rotor	4	4	4	4	4	4	4	4
Cat. No.	-	-	4440	4430	4430	4440	4430	4449

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.15) When using these tubes, bucket 4255 cannot be closed with its lid.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 4294

	
Rotor	
max. RPM max. RCF ²⁾	4,500 min ⁻¹ 5,252
max. capacity	4 blood bags
run-up run-down, braked in sec	115 116
angle temperature in °C ¹⁾	90° +2
Cat. No.	4294





Bucket

Cat. No.



4293



	
Blood bags	
capacity in ml	450 500
blood bags	3-place 3-place
max. RCF ²⁾	5,252 5,252
radius in mm	232 232
Cat. No.	blood bags



Insert

boring Ø x L in mm

blood bags per rotor



-

-

4

4

Cat. No.

4244-A

4244-A


Additional blood bank accessories can be found on [page 183](#)

SWING-OUT ROTOR, 4-PLACE | 4294

	
Rotor	
max. RPM max. RCF ²⁾	4,500 min ⁻¹ 5,071
max. capacity	4 blood bags
run-up run-down, braked in sec	115 116
angle temperature in °C ¹⁾	90° +3
Cat. No.	4294




Bucket

Cat. No.



4298-A



				
Blood bags				
capacity in ml	450	500	750	1,000
blood bags	4-place	4-place	1-place	1-place
max. RCF ²⁾	5,003	5,003	5,003	5,071
radius in mm	221	221	221	224
Cat. No.	blood bags			



Insert

boring Ø x L in mm

blood bags per rotor



-

-

4

4

4

4

Cat. No.

4237-A

4237-A

4237-A

-


Additional blood bank accessories can be found on [page 183](#)

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 6-PLACE | 4296





Rotor

max. RPM max. RCF ²⁾	4,000 min ⁻¹ 3,363
max. capacity	6 x 100 ml
run-up run-down, braked in sec	33 50
angle max. noise level	90° 52 dB (A)
temperature in °C ¹⁾	0
Cat. No.	4296

Bucket

lid	5053
Cat. No.	5051



Vessels

capacity in ml	1.5	2	1.5	2	5	6	7	9	15	25	50	100	100	1–8
Ø x L in mm	11x38	11x38	11x38	11x38	12x75	12x82	12x100	14x100	17x100	24x100	34x100	44x100	40x115	simple / multiple
max. RCF ²⁾	2,486 / 3,363	2,486 / 3,363	3,363	3,363	3,309	3,309	3,291	3,309	3,291	3,291	3,291	3,291	3,291	2,290 / 3,274
radius in mm	139 / 188	139 / 188	188	188	185	185	184	185	184	184	184	184	184	128 / 183
Cat. No.	microliter tubes				tubes²⁾									cyto chambers



Adapter

boring Ø x L in mm	12.5x42	12.5x42	11.5x50	11.5x50	12.5x42	12.5x42	12.5x86	16x50	17.5x86	26x86	36x86	45.5x86	42x86	-
vessels per rotor	240	240	96	96	120	120	120	72	72	30	12	6	6	12
Cat. No.	5257	5257	5281	5281	5227	5227	5247¹⁵⁾	5264	5248¹⁵⁾	5242	5243	5262	5249	5280

Vessels

capacity in ml	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10	15	50
Ø x L in mm	8x66	13x65	11 x 66	15 x 75	11 x 92	13x90	15x92	16x92	15x102	13x75	13x100	16x75	16x100	17x120	29x115
max. RCF ²⁾	3,274	3,345	3,309	3,309	3,309	3,345	3,309	3,291	3,291	3,345	3,345	3,309	3,291	3,434	3,363
radius in mm	183	187	185	185	185	187	185	184	184	187	184	185	184	192	188
Cat. No.	blood collection / urine tubes													tubes with screw cap	



Adapter

boring Ø x L in mm	11x44	13.5x52	12.5x42	16x50	12.5x42	13.5x52	16x50	17.6x86	17.6x86	13.5x52	13.5x86	16x50	17.5x86	17x90	30x86
vessels per rotor	120	72	120	72	120	72	72	66	66	72	72	72	72	42	12
Cat. No.	5267	5268	5227	5264	5227	5268	5264	5258	5258	5268	6301	5264	5248	6306	5259

Vessels

capacity in ml	12	30	50
Ø x L in mm	17x100	25x110	29x115
max. RCF ²⁾	3,434	3,291	3,291
radius in mm	192	184	184
Cat. No.	tubes with screw cap		



Adapter

boring Ø x L in mm	17x90	26 x 86	36x86
vessels per rotor	42	30	12
Cat. No.	6306	5266	5243

CYTO

Cyto system available for this model.
More information on [page 178](#)

- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 1.1) When using these tubes, bucket 5051 cannot be closed with lid 5053.

SWING-OUT ROTOR, 6-PLACE | 4296



Rotor

max. RPM max. RCF	4,000 min ⁻¹ 3,631
max. capacity	6 x 250 ml
run-up run-down, braked in sec	33 50
angle max. noise level	90° 59 dB (A)
temperature in °C ¹⁾	-2
Cat. No.	4296

Bucket

lid bioseal ⁵⁾	5093
Cat. No.	5092



Vessels

capacity in ml	5	6	7	15	25	50	100	100	250	1.1–1.4	1.1–1.4	2.6–3.4	2.7–3	2.7–3	4.9
Ø x L in mm	12x75	12x82	12x100	17x100	24x100	34x100	44x100	40x115	65x115	8 x 66	8 x 66	13 x 65	11x66	11x66	13x90
max. RCF ²⁾	3,542	3,542	3,542	3,488	3,434	3,488	3,488	3,488	3,631	3,488	3,077	3,077	3,488	3,077	3,488
radius in mm	198	198	198	195	192	195	195	195	203	195	172	172	195	172	195
Cat. No.	tubes²⁾									blood collection / urine tubes					



Adapter

boring Ø x L in mm	12.8x45	12.8x45	12.8x82	17.5x60.7	25.5x82	35.5x82.5	45.5x85	42x85	66x103	13.5x60.7	13x54.5	13x54.5	13.5x60.7	13x54.5	13.5x60.7
vessels per rotor	72	72	72	48	24	6	6	6	6	48	72	72	48	72	48
Cat. No.	5128	5128	5120	5136	5122	5124	5125	5126	1791	5137	5138	5138	5137	5138	5137

Vessels

capacity in ml	4–4.5	4.5–5	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8	8.5–10	15	50	25	30	50
Ø x L in mm	15x75	11x92	15x92	16x92	15x102	13x75	16x75	13x100	16x125	16x100	17x120	29x115	25x90	25 x 110	29x115
max. RCF ²⁾	3,488	3,542	3,488	3,488	3,488	3,077	3,488	3,542	3,542	3,488	3,631	3,631	3,363	3,434	3,560
radius in mm	195	198	195	195	195	172	195	198	198	195	203	203	188	192	199
Cat. No.	blood collection / urine tubes									tubes with screw cap					



Adapter

boring Ø x L in mm	17.5x60.7	12.8x82	17.5x60.7	17.5x60.7	17.5x60.7	13x54.5	17.5x60.7	12.8x82	17.5x82	17.5x60.7	17x85	30x85	26x73	25.5x82	30x99
vessels per rotor	48	72	48	48	48	72	48	72	42	48	42	12	18	24	12
Cat. No.	5136	5120	5136	5136	5136	5138	5136	5120	5121⁴⁾	5136	5129	5123	5134	5122	5135

Vessels

capacity in ml	10	250	290
Ø x L in mm	16 x 80	61 x 122	62 x 137
max. RCF ²⁾	3,488	3,631	3,631
radius in mm	195	203	203
Cat. No.	-	5127²⁴⁾	-²⁴⁾



Adapter

boring Ø x L in mm	17.5x60.7	66x103	66x103
vessels per rotor	48	6	6
Cat. No.	5136	6319	6319

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3,4) When using these tubes, bucket 5051 or 5092 cannot be closed with lid 5053 or 5093.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.


SWING-OUT ROTOR, 2-PLACE | 4282

	
Rotor	
max. RPM max. RCF	3,600 min ⁻¹ 2,652
max. capacity	20 plates
run-up run-down, braked in sec	87 94
angle max. noise level	90° 58 dB (A)
temperature in °C ¹⁾	-2
Cat. No.	4282



	
Bucket	
Cat. No.	4285-A



							
Plates							
W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	84x59x46	124x82x20	-
max. RCF ²⁾	2,434	2,434	2,434	2,434	2,434	2,434	2,434
radius in mm	168	168	168	168	168	168	168
Cat. No.	MTP	MTP	CP	DWP	MS	PCR plates	PCR strips



							
Removal aid							
boring Ø x L in mm	-	-	-	-	-	-	-
plates / strips per rotor	16	16	12	4	4	4	48 x 8
Cat. No.	4281	4281	4281	4281	4281	4281+1485	4281+1485

				
Racks				
W x D x H in mm	176x20x41	118x20x70	193x25x60	210x110x44
max. RCF ²⁾	2,652	2,652	2,652	2,579
radius in mm	183	183	183	178
Cat. No.	Olympus Racks	Hitachi Racks	Behring Racks	Rack, 50-place



				
Adapter				
boring Ø x L in mm	-	-	-	-
plates / racks per rotor	12	20	10	2
Cat. No.	4283-B	4287-B	4288-A	4263-A

1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
 The max. RCF for glass tubes annotated with footnote 2) is 4,000.

ANGLE ROTOR, 6-PLACE | 4266

Rotor	
max. RPM max. RCF	9,500 min ⁻¹ 14,025
max. capacity	6 x 250 ml
run-up run-down, braked in sec	82 96
angle	25°
temperature in °C ¹⁾	+2
Cat. No.	4266

Lid bioseal⁵⁾ and phenol-resistant

Cat. No.

INCLUSIVE



Vessels											
capacity in ml	15	25	94	15	50	10	30	50	85	94	250
Ø x L in mm	17x100	24x100	38x102	17x120	29x115	16x80	26x95	29x107	38 x 106	38 x 102	61x122
max. RCF ²⁾	13,319	12,915	12,310	12,915	12,108	13,420	12,915	12,108	12,310	12,310	14,025
radius in mm	132	128	122	128	120	133	128	120	122	122	139
Cat. No.	tubes²⁾			tubes with screw cap							5127²⁴⁾

Adapter											
boring Ø x L in mm	17.6 x 83	26x80	38.6x88	17x106	30x100	16.6x70	26x80	29x90	38.6 x 88	38.6 x 88	61.5x109
vessels per rotor	42	18	6	30	6	48	18	6	6	6	6
Cat. No.	5646	5642	5644	5637	5638	5641	5642	5643	5644	5644	-

- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

— ANGLE ROTOR, 6-PLACE | 4246

	
Rotor	
max. RPM max. RCF	11,500 min ⁻¹ 18,038
max. capacity	6 x 94 ml
run-up run-down, braked in sec	66 68
angle	45°
temperature in °C ¹⁾	+4
Cat. No.	4246


Lid bioseal[®] and phenol-resistant

Cat. No.




INCLUSIVE



	
Vessels	
capacity in ml	0.5 1.5 2.0 3 15 25 50 94 7.5 – 8.5 9 – 10 10 8.5 – 10 5 15 50
Ø x L in mm	10.7x36 11x38 11x38 10x60 17x100 24x100 34x100 38x102 15x92 16x92 15x102 16x100 17x59 17x120 29x115
max. RCF ²⁾	17,299 17,299 17,299 17,299 17,003 16,560 17,743 18,038 17,003 17,003 17,003 17,003 16,856 17,299 17,595
radius in mm	117 117 117 117 115 112 120 122 115 115 115 115 114 117 119
Cat. No.	pediatric microliter tubes tubes²⁾ blood collection / urine tubes - tubes with screw cap

	
Adapter	
boring Ø x L in mm	11.4x39 11.4x39 11.4x39 11.4x39 17.5x92 26x85 35x89 38.2x89.6 17.5x92 17.5x92 17.5x92 17.5x92 17x51 17x106 29.8x97
vessels per rotor	24 24 24 24 6 6 6 6 6 6 6 6 6 6 6
Cat. No.	1449 1449 1449 1449 1451 1447 1463 - 1451 1451 1451 1451 1476 1466 1454

	
Vessels	
capacity in ml	10 30 50 85 94
Ø x L in mm	16x80 26x85 29x107 38 x 106 38 x 102
max. RCF ²⁾	17,003 16,560 17,299 18,038 18,038
radius in mm	115 112 117 122 122
Cat. No.	tubes with screw cap

	
Adapter	
boring Ø x L in mm	16.5x74 26x85 29x92 38.2x89.6 38.2x89.6
vessels per rotor	12 6 6 6 6
Cat. No.	1448 1447 1446 - -

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

ROTO SILENTA 630 RS

Your first choice up to 12 liters

The ROTO SILENTA 630 RS is highly rated in the rapid and efficient centrifugation of blood bags. It is able to spin up to 12 liter of sample or 12 blood bags per run. Four and six-place rotor options are also available to offer the best possible fit.

In industrial or R&D applications the ROTO SILENTA accommodates six vessels up to 2,000 ml each. This unit includes refrigeration with a temperature range from -20°C to +40°C.

— FEATURES

- RPM: 50 - 6,000 min⁻¹ – adjustable in increments of 10
- RCF: 1 - 6,520 – adjustable in increments of 1
- Max. capacity: 6 x 2,000 ml
- The first choice in blood banking centrifuges
- Choice of 3 rotors
- Registered Medical Device
- Easy operation with keypad and control knob
- 89 program memories for more individuality
- 9 acceleration + 19 deceleration stages
- Coolable from -20 bis +40 °C with pre-cooling function
- Data reporting system (optional)

— FIELDS OF APPLICATION

- Hospitals
- Blood banks and transfusion medicine laboratories
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Cell culture laboratories
- Environmental laboratories



Documentation system for blood banks.
More information on [page 160](#)



More information about the control panel
can be found on [page 198](#)



TECHNICAL DATA

ROTO SILENTA 630 RS ^{>)} refrigerated

voltage ^{*)}	400 V 3 ~ + N
frequency	50 – 60 Hz
consumption	9,700 VA
emission, immunity	EN/IEC 61326-1, class B
max. capacity	6 x 2,000 ml
max. RPM	6,000 min ⁻¹
max. RCF	6,520
running time	1 – 999 min: 59 s, ∞ continuous run
dimensions (WxDxH)	813 x 1,015 x 973 mm
weight	approx. 355 kg
temperature control, infinitely variable	from -20 to +40 °C
Cat. No.	5005

208 – 220 V +6 / -10 % 3- (+N) + PE,
with internal transformer

consumption

weight

5005-08

9,000 VA

approx. 401 kg

^{*)} Other voltages on request.

^{>)} Other models on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 6-place	90°	4,500 min ⁻¹	6 x 2,000 ml	4176	152
	swing-out rotor, 4-place	90°	4,500 min ⁻¹	4 x 2,000 ml	4174	152

ANGLE ROTORS

	angle rotor, 6-place	25°	6,000 min ⁻¹	6 x 250 ml	4570	158
---	----------------------	-----	-------------------------	------------	-------------	-----

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



Rotor		Bucket	
max. RPM	4,500 min ⁻¹	Cat. No.	4524-A
max. RCF Rotor 4176 / 4174	6,498 / 5,683		
max. capacity	12 / 8 blood bag		
run-up run-down, braked in sec	125 197		
angle temperature in °C ¹⁾	90° +16 / +10		
Cat. No.	4176 / 4174		



Blood bag

capacity in ml	500	500	750
blood bag per system	4-place	4-place	1-place
max. RCF ⁽²⁶⁾ Rotor 4176 / 4174	6,498 / 5,683	6,498 / 5,683	6,498 / 5,683
radius in mm	287 / 251	287 / 251	287 / 251
Cat. No.	-	-	-



Insert

boring Ø x L in mm	-	-	-
blood bag systems per rotor	12 / 8	12 / 8	12 / 8
Cat. No.	4529³⁰³-AO,-AM,-AU	4592-B	4592-B




+

Additional blood bank accessories can be found on [page 183](#)

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



Rotor		Bucket	
max. RPM	4,500 min ⁻¹	Cat. No.	4546-A
max. RCF	6,271 / 5,479		
max. capacity	12 / 8 blood bag		
run-up run-down, braked in sec	125 197		
angle temperature in °C ¹⁾	90° +10 / 0		
Cat. No.	4176 / 4174		



Blood bag

capacity in ml	450
blood bag per system	4-place
max. RCF Rotor 4176 / 4174	6,271 / 5,479
radius in mm	277 / 242
Cat. No.	-



Insert

boring Ø x L in mm	-
blood bag systems per rotor	12 / 8
Cat. No.	4559-A



+

Additional blood bank accessories can be found on [page 183](#)

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 26) Includes blood bag hanging to prevent erythrocyte accumulation at low speeds. Different hanging heights allow customer-specific adjustments. (4529-AO top, 4529-AM center, 4529-AU bottom). Hanging blood bags may be centrifuged with a maximum RCF of 1,000.

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174

			
Rotor		Bucket	
max. RPM	4,500 min ⁻¹	Cat. No.	4591-A
max. RCF	Rotor 4176 / 4174 6,498 / 5,705		
max. capacity	12 / 8 blood bag		
run-up run-down, braked in sec	125 197		
angle temperature in °C ¹⁾	90° +16 / +10		
Cat. No.	4176 / 4174		




			
Blood bags			
capacity in ml	450	500	750
blood bag per system	3-place	4-place	1-place
max. RCF	Rotor 4176 / 4174 6,498 / 5,705	6,498 / 5,705	6,498 / 5,705
radius in mm	287 / 252	287 / 252	287 / 252
Cat. No.	-	-	-

			
Insert			
boring Ø x L in mm	-	-	-
blood bag systems per rotor	12 / 8	12 / 8	12 / 8
Cat. No.	4598-A	4592-B	4592-B

+ Additional blood bank accessories can be found on [page 183](#)

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174

			
Rotor		Bucket	
max. RPM	3,500 min ⁻¹	Cat. No.	4595-C ³¹⁾
max. RCF	Rotor 4176 / 4174 3,848 / 3,328		
max. capacity	6 x 2,000 ml		
angle temperature in °C ¹⁾	90° +16 / -12		
Cat. No.	4176 / 4174		



		
Vessels		
capacity in ml	max. 1,600 ³⁵⁾	2,000
W x D x H in mm	-	150 x 100 x 180
max. RCF	Rotor 4176 / 4174 3,821 / 3,328	3,848 / -
radius in mm	279 / 243	281 / -
run-up, in sec	95 / 131	29 / -
run-down, braked in sec	197 / 197	41 / -
Cat. No.	-	0550²⁴⁾

		
Insert		
W x D x H in mm	145 x 91 x 146	-
vessels per rotor	6 / 4	6 / -
Cat. No.	4596-A	-

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.
 31) Adapter for accommodating sample tubes and blood collection tubes in carrier 4595-C on request.
 35) Depending on the sample.

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



Rotor			Bucket	
max. RPM		4,500 min ⁻¹	Cat. No.	4523-A
max. RCF	Rotor 4176 / 4174	6,520 / 5,705		
max. capacity		6 / 4 blood bag		
run-up run-down, braked in sec		125 197		
angle temperature in °C ¹⁾		90° +9 / +3		
Cat. No.		4176 / 4174		



Blood bags

capacity in ml	500	750	1,000
blood bag per system	4-place	1-place	1-place
max. RCF Rotor 4176 / 4174	6,475 / 6,475	5,660 / 5,660	6,520 / 5,705
radius in mm	285 / 250	285 / 250	288 / 252
Cat. No.	-	-	-



Insert



boring Ø x L in mm	-	-	-
blood bag systems per rotor	6 / 4	6 / 4	6 / 4
Cat. No.	4516-A	4516-A	-



+

Additional blood bank accessories can be found on [page 183](#)

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



Rotor		Bucket	
max. RPM	4,500 min ⁻¹	lid	5621
max. RCF	6,316 / 5,524	Cat. No.	4547-B
max. capacity	6 / 4 blood bag		
run-up run-down, braked in sec	125 197		
angle temperature in °C ¹⁾	90° +9 / -9		
Cat. No.	4176 / 4174		



Blood bags

capacity in ml	500	450
blood bag per system	4-place	3-place
max. RCF Rotor 4176 / 4174	6,316 / 5,524	6,316 / 5,524
radius in mm	279 / 244	279 / 244
Cat. No.	-	-



Insert

boring Ø x L in mm	-	-
blood bag systems per rotor	6 / 4	6 / 4
Cat. No.	4548	4548



+

Additional blood bank accessories can be found on [page 183](#)

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174




Rotor

max. RPM	4,500 min ⁻¹
max. RCF	Rotor 4176 / 4174 6,294 / 5,501
max. capacity	6/4 x 1,000 ml
run-up run-down, braked in sec	125 197
angle temperature in °C ¹⁾	90° +4 / -11
Cat. No.	4176 / 4174

Bucket

adapter including lid	4255
Cat. No.	4579-A



Vessels

capacity in ml	5	7	9	15	25	50	100	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	9–10	10	1.6–5
Ø x L in mm	12x75	12x100	14x100	17x100	24x100	34x100	44x100	13 x 65	11x66	15x75	11x92	13x90	16x92	15x102	13x75
max. RCF ²⁾	Rotor 4176 / 4174 5,750 / 4,935	5,750 / 4,935	5,886 / 5,094	5,886 / 5,094	5,615 / 4,845	5,705 / 4,890	5,683 / 4,867	5,750 / 4,935	5,750 / 4,935	5,886 / 5,094	5,750 / 4,935	5,750 / 4,935	5,886 / 5,094	5,886 / 5,094	5,750 / 4,935
radius in mm	254 / 218	254 / 218	260 / 225	260 / 225	248 / 214	252 / 216	251 / 215	254 / 218	254 / 218	260 / 225	254 / 218	254 / 218	260 / 225	260 / 225	254 / 218
Cat. No.	tubes²⁾							blood collection / urine tubes							



Adapter

boring Ø x L in mm	13 x 58	13 x 58	17.5 x 53	17.5 x 53	26 x 72	36 x 79	45 x 78	13.5 x 58	13 x 58	17.5 x 53	13 x 58	13.5 x 58	17.5 x 53	17.5 x 53	13.5 x 58
vessels per rotor	180 / 120	180 / 120	114 / 76	114 / 76	42 / 28	24 / 16	12 / 8	126 / 84	180 / 120	114 / 76	180 / 120	126 / 84	114 / 76	114 / 76	126 / 84
Cat. No.	4433	4433	4434	4434	4438	4439	4442	4435	4433	4434	4433	4435	4434	4434	4435

Vessels

capacity in ml	4–7	4–7	8.5–10	15	50	25	30	10	250	290	650	750	1,000	1,000	175
Ø x L in mm	13x100	16x75	16x100	17x120	29x115	25x90	25 x 110	16 x 80	61 x 122	62 x 137	97 x 139	97 x 152	96 x 176	98 x 138	61 x 118
max. RCF ²⁾	Rotor 4176 / 4174 5,750 / 4,935	5,886 / 5,094	5,886 / 5,094	6,022 / 5,207	5,999 / 5,207	5,818 / 5,026	5,818 / 5,026	5,886 / 5,094	6,113 / 5,320	6,113 / 5,320	6,294 / 5,501	6,294 / 5,501	6,294 / 5,501	6,294 / 5,501	6,294 / 5,501
radius in mm	254 / 218	260 / 225	260 / 225	266 / 230	265 / 230	257 / 222	257 / 222	260 / 225	270 / 235	270 / 235	278 / 243	278 / 243	278 / 243	278 / 243	278 / 243
Cat. No.	blood collection / urine tubes			tubes with screw cap				5127²⁴⁾	-²⁴⁾	0554²⁴⁾	0512²⁴⁾	4239²⁴⁾	4255	Falcon	



Adapter

boring Ø x L in mm	13.5 x 58	17.5 x 53	17.5 x 53	17 x 88	30 x 87	26 x 72	26 x 72	16 x 80	62 x 92	62 x 92	98 x 138	98 x 138	98 x 138	-	61 x 118
vessels per rotor	126 / 84	114 / 76	114 / 76	72 / 48	30 / 20	42 / 28	42 / 28	114 / 76	6 / 4	6 / 4	6 / 4	6 / 4	6 / 4	6 / 4	6 / 4
Cat. No.	4435	4434	4434	4437	4441	4438	4438	4434	4443	4443	-	-	-	-	4440

Vessels

capacity in ml	175	200	225	250	500
Ø x L in mm	61 x 144	60 x 130	61 x 137	60 x 162	96 x 147
max. RCF ²⁾	Rotor 4176 / 4174 6,294 / 5,501	6,294 / 5,501	6,294 / 5,501	6,294 / 5,501	6,294 / 5,501
radius in mm	278 / 243	278 / 243	278 / 243	278 / 243	278 / 243
Cat. No.	Nalgene®	Nunc®	Falcon®	Coming®	Coming®



Adapter

boring Ø x L in mm	-	-	-	-	-
vessels per rotor	6 / 4	6 / 4	6 / 4	6 / 4	6 / 4
Cat. No.	4430	4430	4440	4430	4449

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, carrier 4255 cannot be closed with its lid.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174

Rotor	
max. RPM	4,500 min ⁻¹
max. RCF Rotor 4176 / 4174	5,999 / 5,184
max. capacity	6 x 750 ml
run-up run-down, braked in sec	125 197
angle temperature in °C ¹⁾	90° +14 / -1
Cat. No.	4176 / 4174

Bucket	
Cat. No.	4522-A



Vessels															
capacity in ml	4	5	6	7	12	15	25	50	100	2.6-3.4	2.7-3	4-5.5	4.5-5	7.5-8.5	9-10
Ø x L in mm	10x88	12x75	12x82	12x100	16x101	17x100	24x100	34x100	44x115	13x65	11x66	15x75	11x92	15x92	16x92
max. RCF Rotor 4176 / 4174	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003
radius in mm	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221
Cat. No.	tubes²⁾									blood collection / urine tubes					

Adapter															
boring Ø x L in mm	11 x 74	12.5 x 36	12.5 x 74	12.5 x 74	16 x 74	17.5 x 74	26 x 74	35 x 74	41.5 x 74	13.2 x 36	12.5 x 36	17.5 x 36	12.5 x 74	17.5 x 74	17.5 x 74
vessels per rotor	378 / 252	288 / 192	288 / 192	288 / 192	150 / 100	180 / 120	66 / 44	36 / 24	24 / 16	180 / 120	288 / 192	180 / 120	288 / 192	180 / 120	96 / 64
Cat. No.	4224	4213-93	4213	4213	4223	4214	4215	4216	4218	4222-93	4213-93	4214-93	4213	4214	4220

Vessels															
capacity in ml	10	1.6-5	4-7	4-7	8	8.5-10	15	50	12	30	50	250	290	600	650
Ø x L in mm	15x102	13x75	16x75	13x100	16x125	16x100	17x120	29x115	17 x 100	25 x 110	29x115	61 x122	62 x 137	93x134	97 x 139
max. RCF Rotor 4176 / 4174	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,818 / 5,003	5,999 / 5,184	5,999 / 5,184	5,818 / 5,003	5,818 / 5,003	5,909 / 5,094	5,818 / 5,003	5,818 / 5,003	5,999 / 5,184	5,999 / 5,184
radius in mm	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	257 / 221	265 / 229	265 / 229	257 / 221	257 / 221	261 / 225	257 / 221	257 / 221	265 / 229	265 / 229
Cat. No.	blood collection / urine tubes						tubes with screw cap					5127²⁴⁾	-²⁴⁾	0551²⁴⁾	0554²⁴⁾


Adapter															
boring Ø x L in mm	17.5x74	13.2x36	17.5x36	13.2x74	16x74	17.5x74	17x70	30 x 70	17.5x74	26 x 74	30 x 96	62 x 90	62 x 90	94x105	97.5x105
vessels per rotor	180 / 120	180 / 120	180 / 120	180 / 120	150 / 100	180 / 120	138 / 92	48 / 32	96 / 64	66 / 44	36 / 24	6 / 4	6 / 4	6 / 4	6 / 4
Cat. No.	4214	4222-93	4214-93	4222	4223	4214	4232	4245-A	4220	4215	4249	4238	4238	4233	4258

Vessels				
capacity in ml	750	750	250	500
Ø x L in mm	97 x 152	93 x 137	60 x 162	96 x 147
max. RCF Rotor 4176 / 4174	5,999 / 5,184	5,999 / 5,184	5,818 / 5,003	5,999 / 5,184
radius in mm	265 / 229	265 / 229	257 / 221	265 / 229
Cat. No.	0512²⁴⁾	4234-A	Corning®	Corning®

Adapter				
boring Ø x L in mm	97.5x105	97.5x105	61 x 125	97.5x105
vessels per rotor	6 / 4	6 / 4	6 / 4	6 / 4
Cat. No.	4258	4258	6322	4258

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



Rotor

max. RPM	4,500 min ⁻¹
max. RCF	Rotor 4176 / 4174 6,384 / 5,592
max. capacity	6 x 1,000 ml
run-up run-down, braked in sec	125 197
angle temperature in °C ¹⁾	90° +9 / -9
Cat. No.	4176 / 4174

Bucket

lid	5621
Cat. No.	4547-B

Vessels

capacity in ml	5	7	9	15	25	50	100	2.6-3.4	2.7-3	4-5.5	4.5-5	4.9	7.5-8.2	9-10	10
Ø x L in mm	12x75	12x100	14x100	17x100	24x100	34x100	44x100	13 x 65	11x66	15x75	11x92	13x90	15x92	16x92	15x102
max. RCF ²⁾	5,841 / 5,026	5,841 / 5,026	5,977 / 5,184	5,977 / 5,184	5,728 / 4,913	5,773 / 4,981	5,750 / 4,958	5,841 / 5,026	5,841 / 5,026	5,977 / 5,184	5,841 / 5,026	5,841 / 5,026	5,977 / 5,184	5,977 / 5,184	5,977 / 5,184
radius in mm	258 / 222	258 / 222	264 / 229	264 / 229	253 / 217	255 / 220	254 / 219	258 / 222	258 / 222	264 / 229	258 / 222	258 / 222	264 / 229	264 / 229	264 / 229
Cat. No.	tubes ²⁾							blood collection / urine tubes							



Adapter

boring Ø x L in mm	13 x 58	13 x 58	17.5 x 53	17.5 x 53	26 x 72	36 x 79	45 x 78	13.5 x 58	13 x 58	17.5 x 53	13 x 58	13.5 x 58	17.5 x 53	17.5 x 53	17.5 x 53
vessels per rotor	180 / 120	180 / 120	114 / 76	114 / 76	42 / 28	24 / 16	12 / 8	126 / 84	180 / 120	114 / 76	180 / 120	126 / 84	114 / 76	114 / 76	114 / 76
Cat. No.	4433	4433	4434	4434	4438	4439	4442	4435	4433	4434	4433	4435	4434	4434	4434

Vessels

capacity in ml	1.6-5	4-7	4-7	8	8.5-10	15	50	25	30	10	250	290	650	750	1,000
Ø x L in mm	13x75	13x100	16x75	16 x 125	16x100	17x120	29x115	25x90	25x110	16 x 80	62 x 122	62 x 137	97 x 139	97 x 152	96 x 176
max. RCF ²⁾	5,841 / 5,026	5,841 / 5,026	5,977 / 5,184	5,977 / 5,184	5,977 / 5,184	6,090 / 5,298	6,090 / 5,298	5,909 / 5,117	5,909 / 5,117	5,977 / 5,184	6,203 / 5,411	6,203 / 5,411	6,384 / 5,592	6,384 / 5,592	6,384 / 5,592
radius in mm	258 / 222	258 / 222	264 / 229	264 / 229	264 / 229	269 / 234	269 / 234	261 / 226	261 / 226	264 / 229	274 / 239	274 / 239	282 / 247	282 / 247	282 / 247
Cat. No.	blood collection / urine tubes				tubes with screw cap						5127 ²⁴⁾	- ²⁴⁾	0554 ²⁴⁾	0512 ²⁴⁾	4239 ²⁴⁾



Adapter

boring Ø x L in mm	13.5 x 58	13.5 x 58	17.5 x 53	17.5 x 53	17.5 x 53	17 x 88	30 x 87	26 x 72	26 x 72	17.5 x 53	62x92	62x92	98 x 141	98 x 141	98 x 141
vessels per rotor	126 / 84	126 / 84	114 / 76	114 / 76	114 / 76	72 / 48	30 / 20	42 / 28	42 / 28	114 / 76	6 / 4	6 / 4	6 / 4	6 / 4	6 / 4
Cat. No.	4435	4435	4434	4434	4434	4437	4441	4438	4438	4434	4443	4443	-	-	-

Vessels

capacity in ml	175	175	200	225	250	500
Ø x L in mm	61x118	61x144	60x130	61 x 137	60 x 162	96 x 147
max. RCF ²⁾	6,384 / 5,592	6,384 / 5,592	6,384 / 5,592	6,384 / 5,592	6,384 / 5,592	6,384 / 5,592
radius in mm	282 / 247	282 / 247	282 / 247	282 / 247	282 / 247	282 / 247
Cat. No.	Falcon®	Nalgene®	Nunc®	Falcon®	Corning®	Corning®



Adapter

boring Ø x L in mm	-	-	-	-	-	-
vessels per rotor	6 / 4	6 / 4	6 / 4	6 / 4	6 / 4	6 / 4
Cat. No.	4440	4430	4430	4440	4430	4449

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 17) When using these tubes, bucket 4547-B cannot be closed with lid 5621.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

ANGLE ROTOR, 6-PLACE | 4570

Rotor	
max. RPM max. RCF	6,000 min ⁻¹ 5,594
max. capacity	6 x 250 ml
run-up run-down, braked in sec	64 69
angle max. noise level	25° 54 dB(A)
temperature in °C ¹⁾	-16
Cat. No.	4570

Lid bioseal[®] and phenol-resistant

Cat. No.



INCLUSIVE



Vessels											
capacity in ml	15	25	94	15	50	10	30	50	85	94	250
Ø x L in mm	17 x 100	24 x 100	38 x 102	17 x 120	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	38 x 102	61 x 122
max. RCF ²⁾	5,315	5,152	4,910	5,152	4,830	5,353	5,152	4,830	4,910	4,910	5,594
radius in mm	132	128	122	128	120	133	128	120	122	122	139
Cat. No.	tubes ²⁾			tubes with screw cap							5127 ²⁴⁾

Adapter											
boring Ø x L in mm	17.6 x 83	26 x 80	38.6 x 88	17 x 106	30 x 100	16.6 x 70	26 x 80	29 x 90	38.6 x 88	38.6 x 88	61.5 x 109
vessels per rotor	42	18	6	30	6	48	18	6	6	6	6
Cat. No.	5646	5642	5644	5637	5638	5641	5642	5643	5644	5644	-

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.



HETTINFO II DOCUMENTATION SYSTEM

HettInfo II documents important work steps before and during centrifugation – this ensures transparency and traceable processes. The documentation system is operated via a touch display, which guides the user step by step through the centrifugation and records all significant process data.

All documented data points are temporarily stored locally and can be exported directly after the centrifugation or at a defined time as a CSV file. The data can be stored on the network or exported to a USB stick. This makes HettInfo II system independent and facilitates further processing into another software system.



— ADVANTAGES

- 1 **Touch display**
HettInfo II can be operated simply and easily via the touch display – even with laboratory gloves.
- 2 **Step-by-step instructions**
With the step-by-step instructions, the user always knows exactly what to do next. In the event of incorrect operation or errors, a visual and audible message is issued immediately.
- 3 **Automatic data export**
Data obtained can be exported after each run or in specific times.
- 4 **Universal data format**
The exported CSV file is easy to process and work independently for greater compatibility with an existing system.

— TECHNICAL FEATURES

Compatibility	ROTO SILENTA 630 RS, ROTIXA 500 RS
4.3" touch display	Process status display, error messages, settings
User	Any number of users possible
Data logging Scan Module	User ID, blood bag ID, program number
Run data logging	Centrifuge names, centrifuge data, date, start and end time, temperature, radius, acceleration time, braking time, total running time, RPM, RCF, integral RCF, cycle time, brake deactivation speed, end result
File format	CSV
Ports	LAN, USB
Logbook	Documentation of error messages. Export as CSV file on USB stick possible.

— MODULES

HETTINFO II

With HettInfo II you can record running data of your ROTO SILENTA 630 RS or ROTIXA 500 RS centrifuge. To record a complete centrifugation process, we recommend HettInfo II plus Scan Module.



Articles	Includes
HettInfo II – ROTO SILENTA 630 RS	Firmware, touch display
HettInfo II – ROTIXA 500 RS	Firmware, touch display

Cat. No
0955
0956

SCAN MODULE

The barcode scanner included in the Scan Module records all data reliably. The ergonomic holder ensures easy handling and offers secure protection when not in use.

Barcode scanners from the HettInfo I series are compatible with HettInfo II and can still be used.



Articles	Includes
Scan Module – ROTO SILENTA 630 RS	Barcode scanner, bracket, cable clamps
Scan Module – ROTIXA 500 RS	Barcode scanner, bracket, cable clamps

Cat. No
0959
0960

ADD-ON KIT

Articles	Includes
Add-on Kit for model 5005	Firmware, touch display, front panel
Add-on Kit for model 5005-80	Firmware, touch display, front panel
Add-on Kit for model 5005-90	Firmware, touch display, front panel
Add-on Kit for model 4950	Firmware, touch display, front panel

Cat. No
E4378
E4393
E4416
E4409

With the Add-on Kit, ROTO SILENTA 630 RS models from model year 01/2008* can be upgraded to HettInfo II. To capture a complete centrifugation process, we recommend the Add-on Kit plus Scan Module.

* Older models on request.

PRODUCT VIDEOS


Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



CELL WASHER

Automated cell washing centrifuge

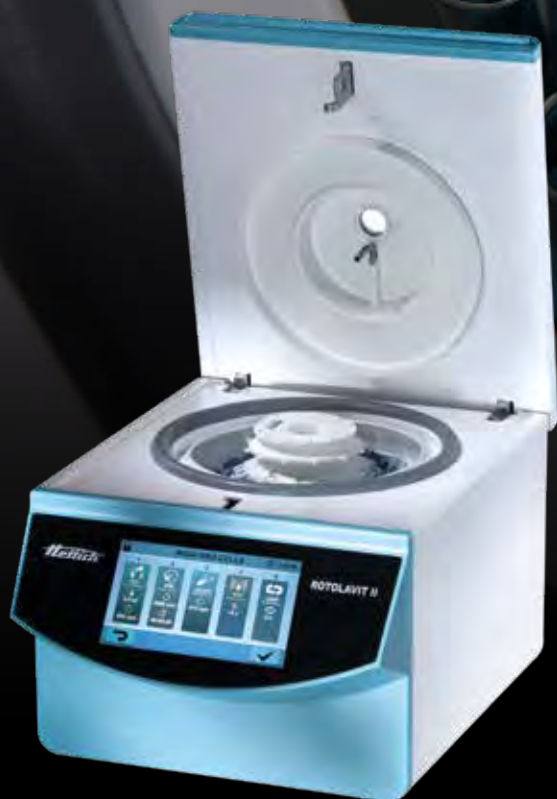

ROTOLAVIT II
on page 164



05

ROTOLAVIT II

User friendly serology solutions

The ROTOLAVIT II cell washing system facilitates routine tasks in transfusion laboratories. It was developed for cross-matching, as well as antibody search and differentiation, and for cell washing in TB tests. Its modern touch screen enables the simple and rapid input of up to 20 different programs. The centrifuge has a small footprint and delivers reliable results without the need for costly consumables.

— FEATURES

- Max. RPM: 3,500 min⁻¹
- Max. RCF: 1,438
- Max. capacity: 24 standard tubes
- Automatic cell washing system for serological testing
- Choice of 2 rotors 12-place or 24-place
- IVD-conform according to directive 98/79/EC
- Maximum noise level of ≤ 49 dB (A)
- Easy operation with intuitiv touch screen
- 24 program memories for more individuality
- 7 pre-installed application programs

— FIELDS OF APPLICATION

- Hospitals
- Hematological laboratories
- Blood centers
- Clinical laboratories



TECHNICAL DATA

ROTOLAVIT II	
voltage	100 – 240 V 1 ~
frequency	50 – 60 Hz
consumption	144 VA
emission, immunity	EN/IEC 61326-3-2 / FCC CFR47 part 15, ed 2015-04-21 (e-CFR) class B
max. capacity	24 standard tubes (10 x 75 mm or 12 x 75 mm)
max. RPM	3,500 min ⁻¹
max. RCF	1,438
radius (both rotors)	105 mm
dimensions (HxWxD)	330x480x280 mm
weight	approx. 24.5 kg
max. noise level	≤ 49 dB (A)
Cat. No.	1008-00

The ROTOLAVIT II is not available in all countries.

AVAILABLE ROTORS

SWING-OUT ROTORS		angle	max. RPM	max. capacity	Cat. No	page
	swing-out rotor, 12-place	45°	3,500 min	12 x (10x75 mm* or 12x75 mm) * Tubes requires adapter No. 1019	1017-A	166
	swing-out rotor, 24-place	45°	3,500 min	24 x (10x75 mm* or 12x75 mm) * Tubes requires adapter No. 1019	1018-A	166



SWING-OUT ROTOR, 12-PLACE | 1017-A



Rotor

max. RPM max. RCF	3,500 min ⁻¹ 1,438
max. capacity	12 x 5 ml
angle max. noise level	45° 49 dB (A)
Cat. No.	1017-A



Vessels

		
capacity in ml	3	5
Ø x L in mm	10 x 75	12 x 75
max. RCF ²⁾	1,438	1,438
radius in mm	105	105
Cat. No.	tubes²⁾	



Adapter

boring Ø x L in mm	-	-
vessels per rotor	12	12
Cat. No.	1019 (12 pcs.)	-

SWING-OUT ROTOR, 24-PLACE | 1018-A



Rotor

max. RPM max. RCF	3,500 min ⁻¹ 1,438
max. capacity	24 x 5 ml
angle max. noise level	45° 49 dB (A)
Cat. No.	1018-A



Vessels

		
capacity in ml	3	5
Ø x L in mm	10 x 75	12 x 75
max. RCF ²⁾	1,438	1,438
radius in mm	105	105
Cat. No.	tubes²⁾	



Adapter

boring Ø x L in mm	-	-
vessels per rotor	24	24
Cat. No.	1019 (12 pcs.)	-

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.



DUAL CENTRIFUGE

Homogenizing, mixing and
milling – fast and efficient



ZENTRIMIX 380 R
on page 170



06

ZENTRIMIX 380 R

Efficient and safe work in the laboratory

The dual centrifuge ZentriMix 380 R allows many challenging laboratory tasks in research, development and analytics in a very efficient way or makes them possible for the first time. Examples are the rapid mixing of viscous materials, the production of nanoparticles in closed (sterile) vessels or tissue disruption. A particular advantage is the powerful cooling system for temperature-sensitive samples.

The ZentriMix 380 R was developed on the basis of proven Hettich centrifuge technology. This makes the device safe, reliable and durable. In addition, the compact design and the low noise level ensure a comfortable working environment in the laboratory.

— FEATURES

- (Nano-) Milling of samples
- QuEChERS-Analysis in one step in 50-70% less time
- Fast und homogeneous Mixing of highly viscous materials
- Usage of inexpensive standard-vials
- Eliminates cleaning time and effort vs. the standard mills or mixers
- Guarantees sterility of the sample (i.e. genetic analysis after Milling)
- Integrated cooling for sensitive samples
- Very wide volume bandwidth when mixing (2 ml to 200 ml)

— FIELDS OF APPLICATION

- Analytical laboratories
- Food control laboratories
- University / Academic research
- Pharmaceutical laboratories
- Forensic laboratories
- Environmental laboratories
- Cell culture laboratories
- Cosmetic laboratories



More information about the control panel
can be found on [page 198](#)



TECHNICAL DATA

ZentriMix 380 R


voltage ¹⁾	200 – 240 V 1 ~	110 – 127 V 1 ~
frequency	50 – 60 Hz	60 Hz
consumption	1,400 VA	1,600 VA
emission, immunity	EN/IEC 61326-1, class B	FCC class B
max. capacity	2 x 200 ml / 40 x 2.0 ml	2 x 200 ml / 40 x 2.0 ml
max. RPM (S rotor / Swing-out rotor, 4-place)	2,500 / 5,000 min ⁻¹	2,500 / 5,00 min ⁻¹
max. RCF (S rotor / Swing-out rotor, 4-place)	1,048 / 4,863	1,048 / 4,863
dimensions (WxDxH)	472x759x418 mm	472x769x418 mm
weight	approx. 81.5 kg	approx. 89 kg
Cat. No.	3200	3200-01

1) Other voltages on request.

AVAILABLE ROTORS

ROTORS	angle	max. RPM	max. capacity	Cat. No.	page
 H rotor, 2-place	40°	1,500 min ⁻¹	2 x 200 ml	3206	172
 S rotor, 2-place	40°	2,500 min ⁻¹	2 x 200 ml	3205	172
 Swing-out rotor, 4-place	40°	5,000 min ⁻¹	4 x 250 ml	3234	173

OPERATING PRINCIPLE OF THE ROTOR

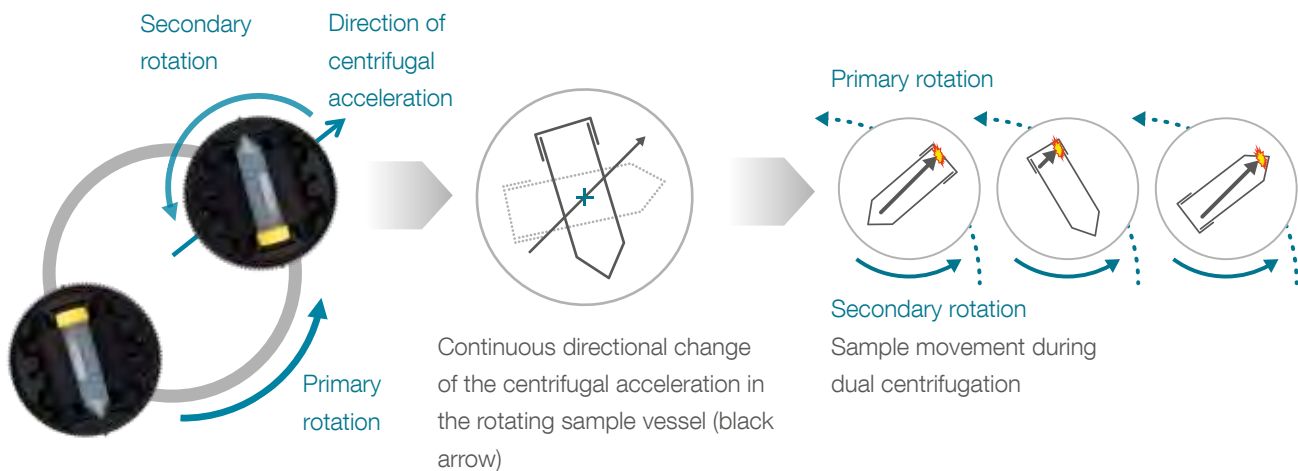

H ROTOR, 2-PLACE | 3206



Rotor

max. RPM max. RCF	1,500 min ⁻¹ 377
max. capacity	2 x 200 ml
run-up run-down, braked in sec	22 24
angle temperature in °C ²⁾	40° +20
Cat. No.	3206



Vessels

capacity in ml	15	50	150	200
Ø x L in mm	17 x 120	29 x 115	68 x 60	68 x 79
max. RCF ²⁾	377	377	377	377
radius in mm	150	150	150	150
Cat. No.	tubes	jars with screw cap		



Adapter

vessels per rotor	6	6	2	2
Cat. No.	3218	3218	3221-A	3221-A



S-ROTOR, 2-PLACE | 3205



Rotor

max. RPM max. RCF	2,500 min ⁻¹ 1,048
max. capacity	2 x 200 ml
run-up run-down, braked in sec	35 35
angle temperature in °C ²⁾	40° +20
Cat. No.	3205



Vessels

capacity in ml	2.0	10	150	200
Ø x L in mm	11 x 45.5	25.5 x 49	68 x 60	68 x 79
max. RCF ²⁾	1,048	1,048	1,048	1,048
radius in mm	150	150	150	150
Cat. No.	-	-	jars with screw cap	



Adapter

vessels per rotor	4	4	2	2
Cat. No.	3236	3211	3221-A	3221-A



Removal aid for Twist-Top disk 3236.

3210

37) Conical 2 ml Sarstedt PP microlitre tubes with screw cap (Art.No. 72.693.005)


38.1) Please only use polypropylene vessels in accordance with ISO 8362 (No Glass!), to fit into the adapter the height of the vessel including crimp cap and stopper should be 48.5 mm.

39) All S Rotor adapters can also be used in the H Rotor.


SWING-OUT ROTOR, 4-PLACE | 3234

	
Rotor	
max. RPM max. RCF	5,000 min ⁻¹ 4,863
max. capacity	4x250 ml
run-up run-down, braked in sec	42 27
angle	90°
Cat. No.	3234




	
Bucket	
lid bioseal ⁵⁾	1751
Cat. No.	1752



											
Vessels											
capacity in ml	10	9	15	94	100	100	250	15	50	30	50
Ø x L in mm	25.5x49	14x100	17x100	38x102	40x115	44x100	65 x 115	17x120	29 x 115	25x110	29x115
max. RCF ⁷⁾	top / bottom	4,695	4,668	4,668	4,807	4,640	4,640	4,640	4,863	4,863	4,528
radius in mm	top / bottom	168	167	167	172	166	166	166	174	174	162
Bestell-Nr.	-	tubes ⁷⁾						tubes with screw cap			



											
Adapter											
boring Ø x L in mm	26x33	17.5x61	17.5x61	38.5x80	41x97	45x87	66x104.5	17x84	30x84	26.5x72	30x80
vessels per rotor	24	52	52	8	4	4	4	36	16	20	16
Cat. No.	3235	1763-A	1763-A	1777	1767	1766	1768	1771-A	1772-A	1779	1774-A

5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.

7) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

38.2) Polypropylene vessels in accordance with ISO 8362.


40) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



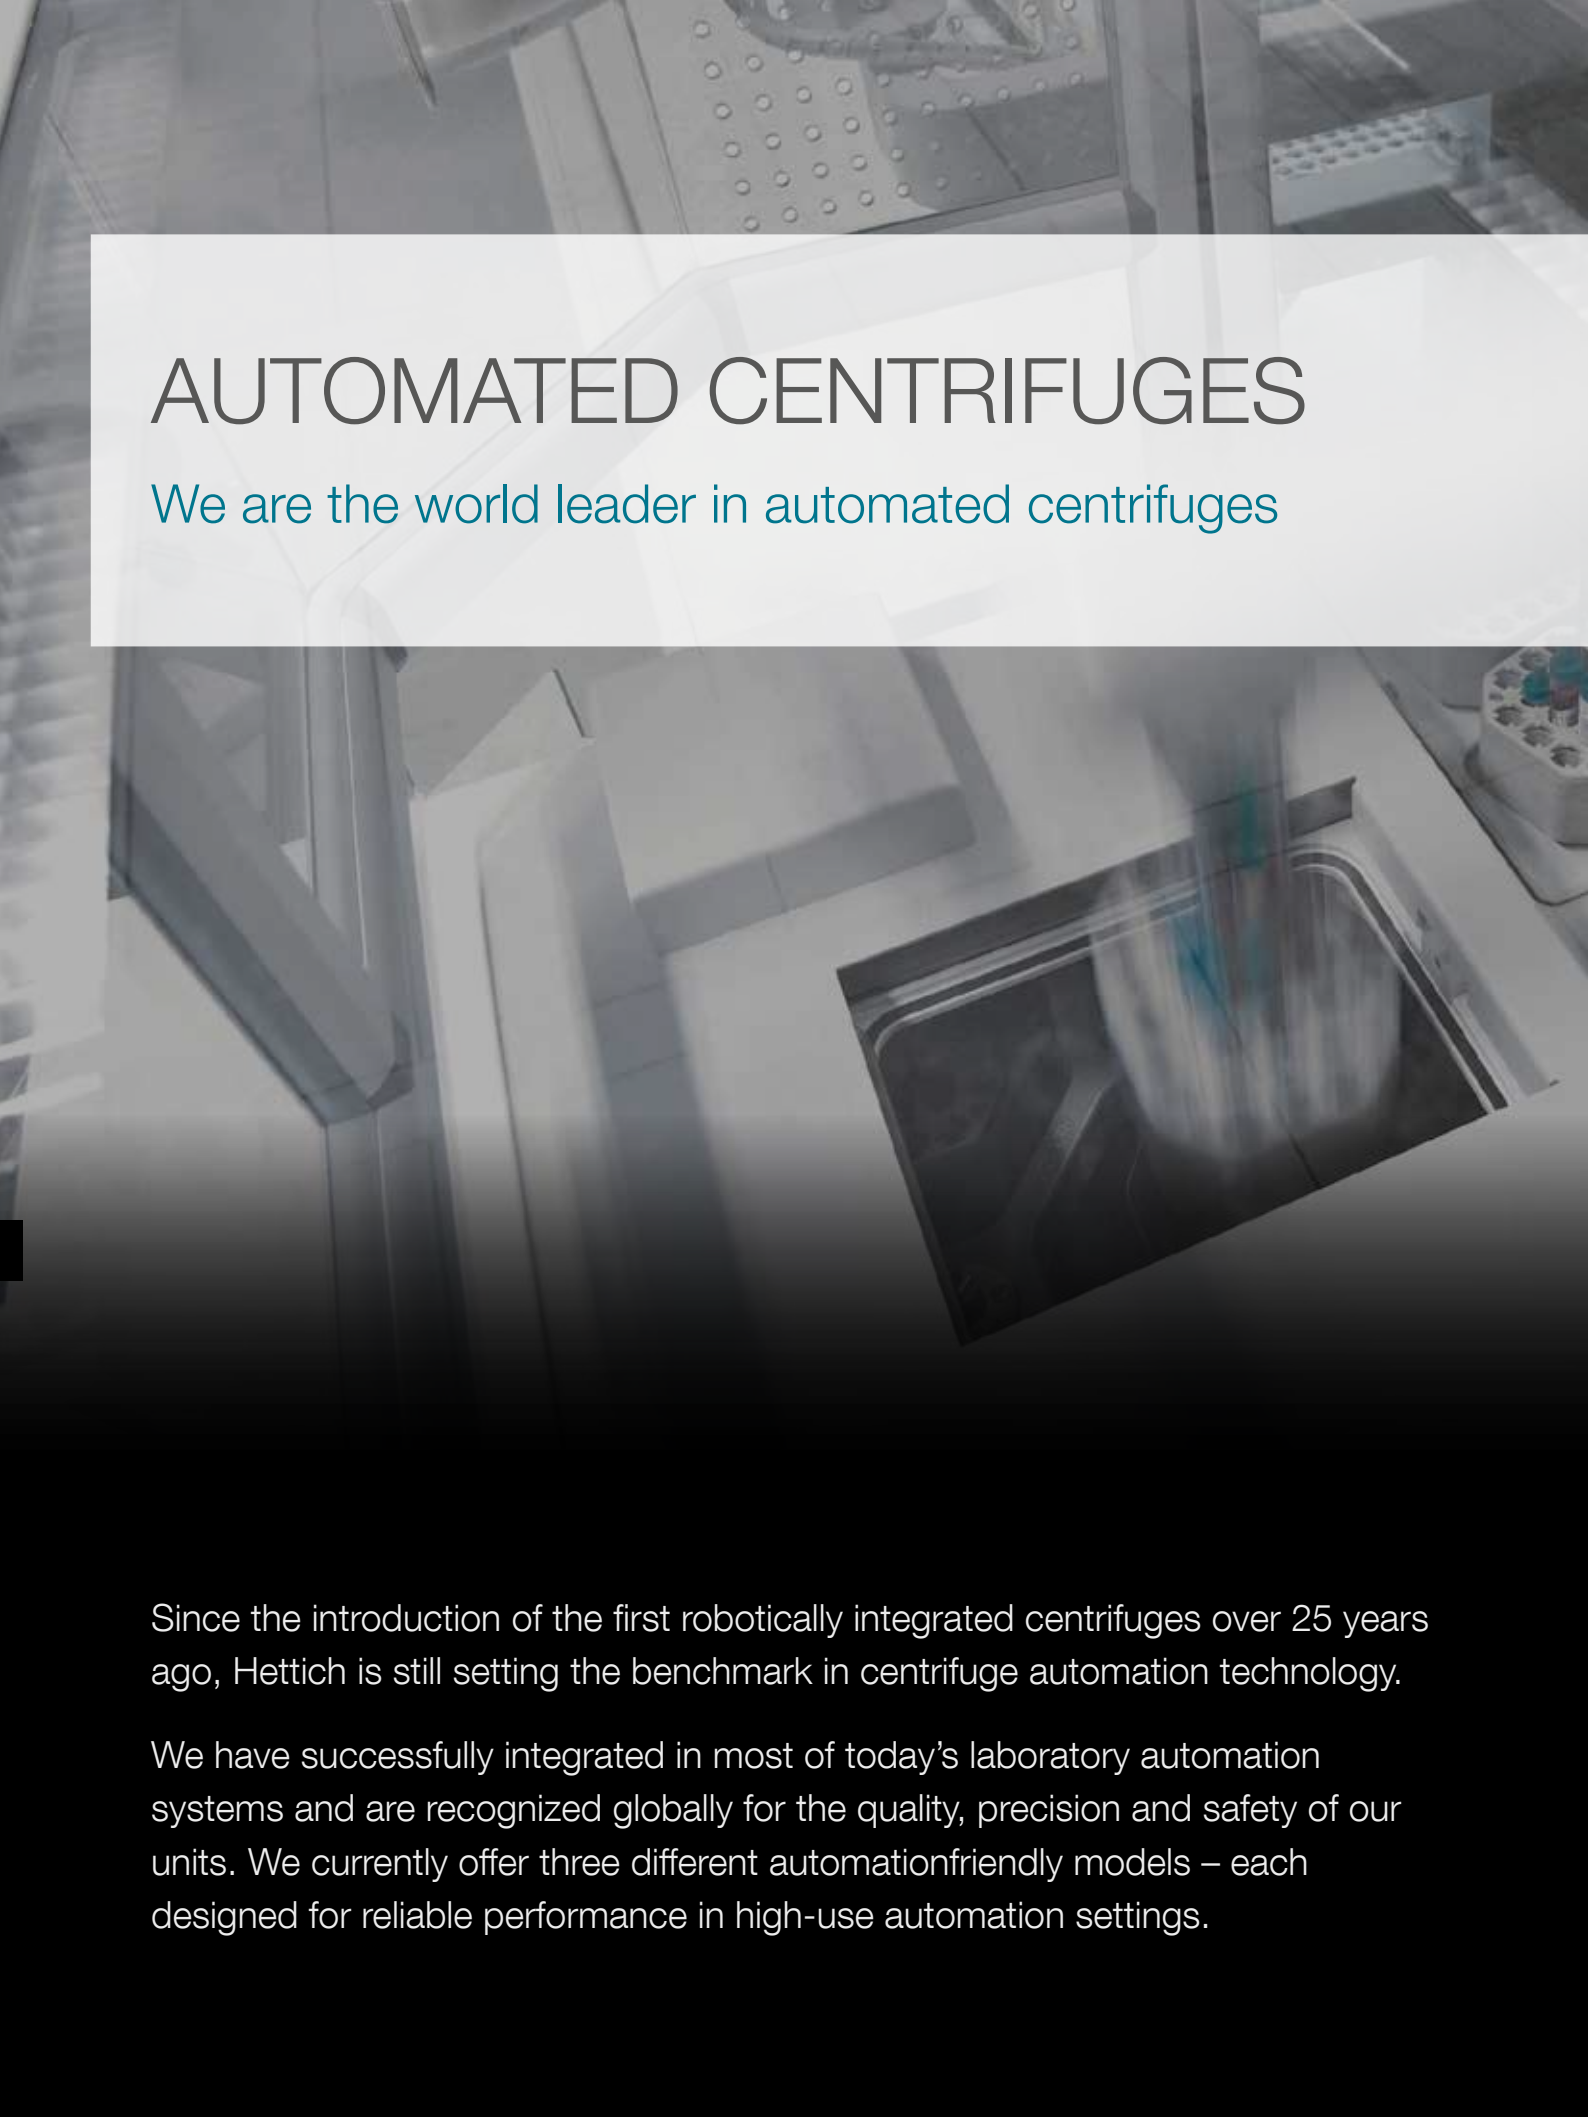

AUTOMATED CENTRIFUGES

We are the world leader in automated centrifuges

Since the introduction of the first robotically integrated centrifuges over 25 years ago, Hettich is still setting the benchmark in centrifuge automation technology.

We have successfully integrated in most of today's laboratory automation systems and are recognized globally for the quality, precision and safety of our units. We currently offer three different automationfriendly models – each designed for reliable performance in high-use automation settings.

07



MIKRO 220
ROBOTIC



ROTINA 380
ROBOTIC




ROTANTA 460
ROBOTIC

Find more information in our special brochure or on our website at
www.hettichlab.com

EQUIPMENT


The useful addition

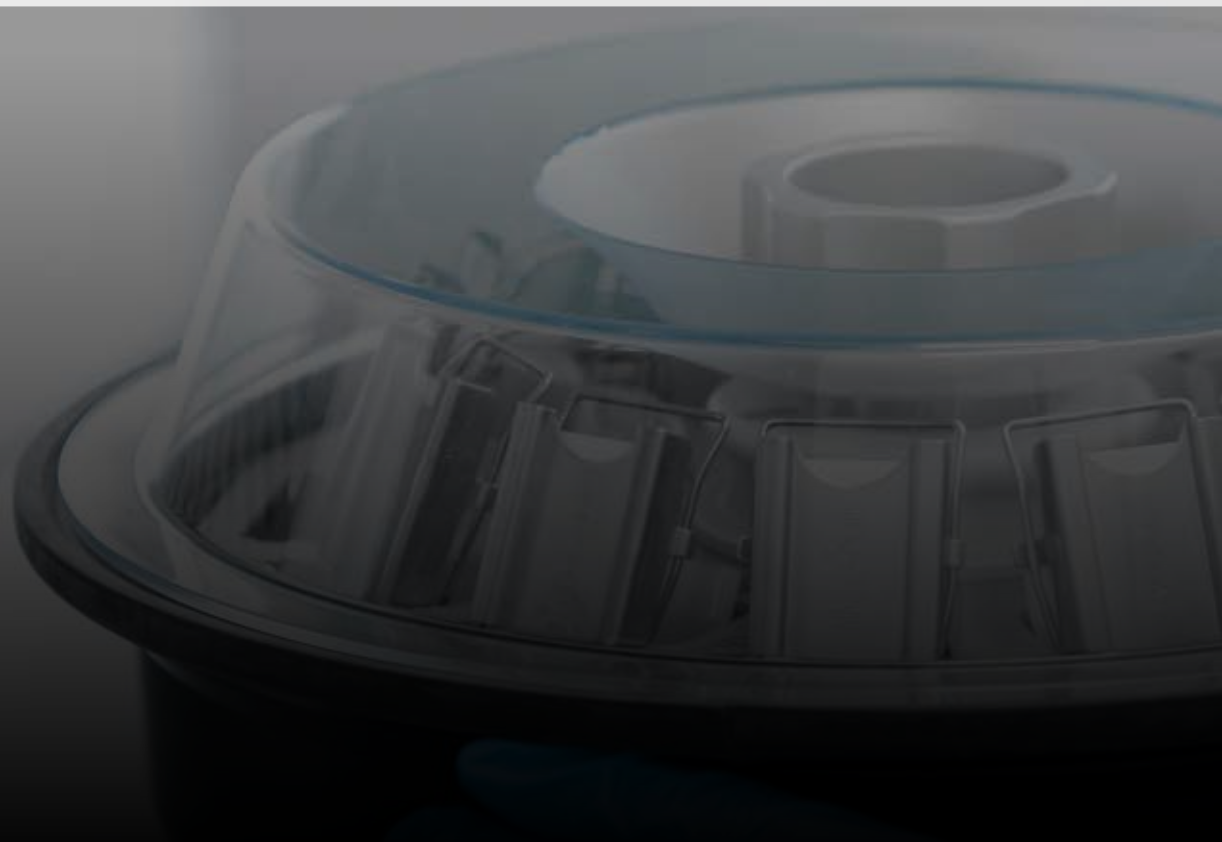

CYTO SYSTEM
on page 178



ROLLING CABINET
on page 183



BLOOD BANK
ACCESSORIES
on page 183

A person wearing a white lab coat and blue gloves is working in a laboratory. They are holding a petri dish with a clear lid that has a grid pattern. The background is dark and out of focus, showing some laboratory equipment. The number '08' is overlaid in large, bold, white digits on the right side of the image.

08


HETTICH CYTO SYSTEM

Cytological preparations – safe and economic

Increased demands on security or flexibility as well as time and cost pressures represent a large challenge for today's cytology laboratory. Hettich's three cyto systems are available to tackle these challenges. Reliable, flexible and cost-saving solutions – all IVD-compliant according to EU Directive 98/79/EC.

SYSTEM 1

System 1 is particularly suitable for a high sample throughput thanks to its 12-place rotor. In addition, the autoclavable swing-out rotor with a TÜV certified, bioseal rotor lid provides maximum safety. This system can be used in two proven Hettich benchtop centrifuges, offers comprehensive accessories and is very easy to handle. The end results is an optimal cell presentation.

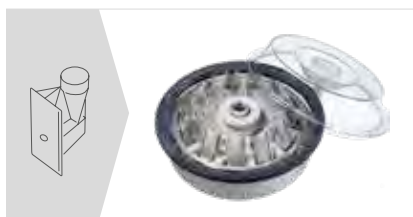
Compatible for models:

UNIVERSAL 320 / 320 R |
ROTOFIX 32 A

Benefits:

- Closed, autoclavable rotor with Bio-Seal lid
- 12-place swing-out rotor for maximum sample throughput
- Large selection of cytochambers for single and multiple use. Re-usable cytochambers are autoclavable
- Easy handling
- Good cell representation

SYSTEM 2

This system offers you the highest possible flexibility. On the one hand, volumes between 1 and 8 ml can be prepared while up to 8 cell sediments can fit on a single slide. In addition, this accessory can be used in many Hettich centrifuges, often without rotor replacement. This accessory is inexpensive and is characterized by a high, representative cell yield.


Compatible for models:

ROTOFIX 32 A | UNIVERSAL 320 /
320 R | ROTINA 380 / 380 R | ROTINA
420 / 420 R | ROTANTA 460 / 460 R |
ROTIXA 500 RS

Benefits:

- Large variety of accessories
- Flexible sample volumes
- Can be used with and without filter cards, depending on application and requirements.
- Very high cell yield

SYSTEM 3

System 3 combines the easy handling of System 1 with the flexibility and price advantage of System 2. It can operate in a variety of Hettich centrifuges and, like System 1, requires only a single centrifugation step to arrive at a dry cell pellet. The three different sediment size options give a distinct advantage.


Compatible for models:

ROTOFIX 32 A | ROTINA 420 / 420 R |
UNIVERSAL 320 / 320 R

Benefits:

- Easy handling
- Ideal for small sample volumes
- Can be used with and without filter cards, depending on application and requirements. (Dry or moist cell sediment)

Assembly of a complete cyto insert

SYSTEM 1

cyto chamber with filter card

Clips

swing-out rotor, 12-place

MOST POPULAR

SYSTEM 2

lid

ring

cyto chamber

Slide carrier with filter card

bucket

SYSTEM 3

lid

cyto chamber

Slide carrier with filter card and ring

bucket

SYSTEM 1 – rotor and accessories

— SWING-OUT ROTOR

Swing-out rotor, 12-place
For ROTOFIX 32 A | UNIVERSAL 320 / 320 R

max. RPM max. RCF	2,000 min ⁻¹ 438
max. capacity	12 cyto chambers
run-up run-down, braked in sec	19 18
Angle	90°
Cat. No.	1515-A

+

Lid bioseal⁵⁾

Cat. No.	INCLUSIVE
-----------------	------------------

Stand

Cat. No.	1528
-----------------	-------------

— CYTO CHAMBERS

Cyto chambers (disposable)

capacity in ml	0.5	0.2
area in mm ²	28.3	28.3
Ø in mm	6	6
Cat. No.	1531 (50 pcs.) 1534 (500 pcs.)	1532 (50 pcs.)

+

Clips (autoclavable)

Cat. No.	1524 (4 pcs.)	1524 (4 pcs.)

+

Filter cards

Cat. No.	filter card white (inclusive)	filter card brown (inclusive)

Cyto chambers (re-usable, autoclavable)

capacity in ml	0.5	6 ¹⁸⁾
area in mm ² / (L x W) in mm	28.3	13.4 x 22
Ø in mm	6	-
Cat. No.	1538 (12 pcs.)	1536 (12 pcs.)

+

Clips (autoclavable)

Cat. No.	1524 (4 pcs.)	1524 (4 pcs.)

+

Filter cards / seals

Cat. No.	1539 (200 pcs.)	1537 (100 pcs.)

5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

18) This is the maximum capacity. The recommended quantity to be used per chamber is 4 ml.

SYSTEM 2 – rotors and equipment

— SWING-OUT ROTOR

Swing-out rotor, 4-place For ROTOFIX 32 A | UNIVERSAL 320 / 320 R



max. RPM max. RCF	4,000 min ⁻¹ 2,451
max. capacity	8 cyto chambers
run-up run-down, braked in sec	22 25
angle	90°
Cat. No.	1624



Bucket



lid	1661
Cat. No.	1660



Swing-out rotor, 4-place For UNIVERSAL 320 / 320 R



max. RPM max. RCF	5,000 min ⁻¹ 2,879
max. capacity	8 cyto chambers
run-up run-down, braked in sec	30 32
angle temperature in °C ¹⁾	90° -10
Cat. No.	1494



Bucket



lid	1452
Cat. No.	1452




Swing-out rotor, 4-place For ROTINA 380 / 380 R



max. RPM max. RCF	4,000 min ⁻¹ 2,898
max. capacity	16 cyto chambers
run-up run-down, braked in sec	24 17
angle temperature in °C ¹⁾	90° -8
Cat. No.	1798



Bucket



lid	5053
Cat. No.	5051

Adapter



Cat. No.	5280
-----------------	-------------




Swing-out rotor, 4-place For ROTINA 420 / 420 R



max. RPM max. RCF	4,000 min ⁻¹ 2,898
max. capacity	16 cyto chambers
run-up run-down, braked in sec	18 16
angle temperature in °C ¹⁾	90° -1
Cat. No.	4753



Bucket



lid	5053
Cat. No.	5051

Adapter



Cat. No.	5280
-----------------	-------------




Swing-out rotor, 4-place For ROTANTA 460 / 460 R / 460 RC / 460 RF



max. RPM max. RCF	4,000 min ⁻¹ 3,095
max. capacity	16 cyto chambers
run-up run-down, braked in sec	40 45
angle	90°
Cat. No.	5694



Bucket



lid	5053
Cat. No.	5051

Adapter



Cat. No.	5280
-----------------	-------------



Swing-out rotor, 4-place For ROTANTA 460 / 460 R / 460 RC / 460 RF

max. RPM max. RCF	4,600 min ⁻¹ 4,069
max. capacity	16 cyto chambers
run-up run-down, braked in sec	75 88
angle temperature in °C ¹⁾	90° +10

Cat. No. 5699-R



Bucket

Cat. No.



5628

Adapter

Cat. No.



5220-A

Adapter

Cat. No.



5280



Swing-out rotor, 6-place For ROTOFIX 32 A | UNIVERSAL 320 / 320 R


max. RPM max. RCF	4,000 min ⁻¹ 2,039
max. capacity	12 cyto chambers
run-up run-down, braked in sec	22 25
angle temperature in °C ¹⁾	90°

Cat. No. 1626



Bucket

Cat. No.



1661

Cat. No.

1660



Swing-out rotor, 6-place Passend für ROTINA 380 / 380 R

max. RPM max. RCF	4,000 min ⁻¹ 2,003
max. capacity	12 cyto chambers
run-up run-down, braked in sec	19 18
angle temperature in °C ¹⁾	90° -6

Cat. No. 1726



Bucket

Cat. No.



1661

Cat. No.

1660



Swing-out rotor, 6-place For ROTANTA 460 | 460 R | 460 RC | 460 RF


max. RPM max. RCF	4,000 min ⁻¹ 3,291
max. capacity	24 cyto chambers
run-up run-down, braked in sec	38 46
angle temperature in °C ¹⁾	90° 0

Cat. No. 4446



Bucket

Cat. No.



5053

Cat. No.

5051

Adapter

Cat. No.



5280



Swing-out rotor, 6-place For ROTIXA 500 RS


max. RPM max. RCF	4,000 min ⁻¹ 3,274
max. capacity	24 cyto chambers
run-up run-down, braked in sec	33 50
angle temperature in °C ¹⁾	90° 0

Cat. No. 4296



Bucket

Cat. No.



5053

Cat. No.

5051

Adapter

Cat. No.



5280



CYTO CHAMBERS

						
Cyto chambers						
capacity in ml	1	2	4	8	3 x 2	4 x 1
area in mm ²	30	60	120	240	3 x 60	4 x 30
Ø in mm	6.2	8.7	12.4	17.5	3x8.7	4x6.2
Cat. No.	1663-100 (100 pcs.)	1664-100 (100 pcs.)	1665-100 (100 pcs.)	1666-100 (100 pcs.)	1667-100 (100 pcs.)	1668-100 (100 pcs.)
 Slide carrier (autoclavable)						
Cat. No.	1662	1670	1662	1670	1662	1670
 Filter cards for 1662						
Cat. No.	1675 (200 pcs.)	1675 (200 pcs.)	1675 (200 pcs.)	1676 (100 pcs.)	1677 (100 pcs.)	1678 (100 pcs.)
 Filter cards for 1670						
Cat. No.	1692 (200 pcs.)	1692 (200 pcs.)	1692 (200 pcs.)	1691 (100 pcs.)	1694 (100 pcs.)	1693 (100 pcs.)

SYSTEM 3 – rotors and equipment

SWING-OUT ROTORS

Swing-out rotor, 4-place For ROTOFIX 32 A UNIVERSAL 320 / 320 R		Bucket	
max. RPM max. RCF	4,000 min ⁻¹ 1,467	lid	inclusive
max. capacity	4 cyto chambers	Cat. No.	1680
run-up run-down, braked in sec	20 25		
angle	90°		
Cat. No.	1624		
Swing-out rotor, 6-place For ROTOFIX 32 A UNIVERSAL 320 / 320 R		Bucket	
max. RPM max. RCF	5,000 min ⁻¹ 1,842	lid	inclusive
max. capacity	6 cyto chambers	Cat. No.	1680
run-up run-down, braked in sec	20 22		
angle	90°		
Cat. No.	1626		






CYTO CHAMBERS

			
Cyto chambers			
area in mm ²	30	60	120
Ø in mm	6.2	8.7	12.4
Cat. No.	1671-100 (100 pcs.)	1672-100 (100 pcs.)	1673-100 (100 pcs.)
 Filter cards			
Cat. No.	1696 (100 pcs.)	1697 (100 pcs.)	1698 (100 pcs.)

ROLLING CABINETS


All rolling cabinets are of sturdy design and feature castors and two locks. Any vibrations of the centrifuge are safely compensated for.

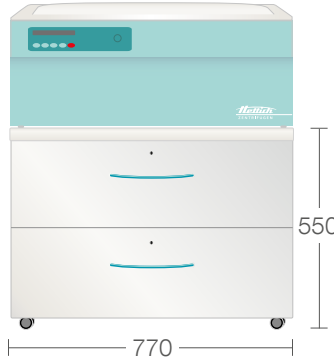			
Low and narrow, with one drawer. Depth 650 mm	Low and wide, with one drawer. Depth 650 mm	High and narrow, with two drawers. Depth 650 mm	High and wide, with two drawers. Depth 650 mm
Cat. No. 4612-A	Cat. No. 4614-A	Cat. No. 4613-A	Cat. No. 4615-A

MODEL	ROTOFIX	UNIVERSAL		ROTINA		ROTINA		ROTANTA		ROTOFIX	
Model variant	32 A	320	320 R	380	380 R	420	420 R	460	460 R	46	46 H
4612-A + 4613-A	•	•	•	•	•	•		•		•	•
4614-A + 4615-A							•		•		

• Rolling cabinet is compatible for the marked model.

ACCESSORIES FOR CENTRIFUGING BLOOD BAG SYSTEMS

			
HettLiner Blood bags can be secured in inserts using HettLiners. After centrifuging, they can be removed by their loops without disturbing the sediment.	Compensatory weights (set) If blood bag carriers are not filled to the same weight, then compensatory weights can be used to make up the difference. One set includes: 40 balancing weights, 2 g each; 20 balancing weights, 5 g each; 10 balancing weights, 10 g each; 5 balancing weights, 20 g each; 5 balancing weights, 40 g each	Balancing inserts* In case there are not enough blood bag systems to occupy every carrier of the rotor, empty carriers can be filled with balancing inserts. Taring weights supplied with the inserts may be used for fine balancing.	Loading aid Secure your samples and avoid accidental spillage with the convenient Loading aid for centrifuge inserts. The Hettich Loading aid allows users to confidently hold and manage their samples without the risk of the inserts toppling over.
Cat. No. 4564	Cat. No. 4566	4584-A for insert 4559-A 4587-A for insert 4592-B 4589-A for insert 4516-A	Cat. No. 4509

* Can only be used for ROTO SILENTA 630 RS inserts.

INCUBATORS

Efficient use of valuable space



HETTCUBE 200 | 200 R
on page 186



HETTCUBE 400 | 400 R
on page 186



HETTCUBE 600 | 600 R
on page 186

09



THE NEXT HETTCUBE GENERATION

Now with touchscreen and more options

With the new touch screen, HettCube incubators and cooled incubators guarantee intuitive operation with flexible and individual setting options and many new features. The proven combination of natural and forced convection ensures stable and homogeneous temperatures in a much larger part of the interior than conventional incubators. This offers you up to 30% more validated useful space with the same interior space. In addition, the high design of the HettCube incubators requires up to 50% less floor space with comparable capacity.

— FEATURES

- Maximal validated usable space on a small footprint
- One-hand operation without additional inner door
- 4.3 inch touch display for intuitive operation
- Automatic door closure with magnetic seals, door orientation can be easily changed
- Low noise level of ≤ 44 dB(A)
- TÜV certified and factory certificate HettCert with 9 measuring points according to DIN 12880:2007-5 standard
- HettCube without cooling requires only 1 °K (1 °C) above stable ambient temperature
- Models with IVD approval
- Inclusive up to 3 standard shelves and 1 HTS shelf with telescopic rail

Additionally for cooled models:

- Temperature drop with holiday function
- Temperature selection monitor class 3.2

— FIELDS OF APPLICATION

- Microbiological laboratories
- Hospital
- Pharmaceutical laboratories
- Food analyzing laboratories
- Scientific laboratories in universities
- Cosmetic industry
- Food and beverage
- Agricultural industry
- Life science



* also available without IVD

— TECHNICAL DATA



HettCube 200 | 200 R

HettCube 400 | 400 R

HettCube 600 | 600 R

Temperature range for incubators cooled incubators	1 K above ambient temperature up to +65 °C 0 °C up to +65 °C	1 K above ambient temperature up to +65 °C 0 °C up to +65 °C	1 K above ambient temperature up to +65 °C 0 °C up to +65 °C
Exterior dimensions (without access port and door handle) W x D x H in mm	710 x 825 x 970	710 x 825 x 1425	710 x 825 x 1,990
Interior dimensions W x D x H in mm	535 x 690 x 420	535 x 690 x 850	535 x 690 x 1,415
Internal volume in liters	150	310	520
Validated usable volume in liters	82	199	351
Percentage validated usable volume / internal volume	54 %	64 %	67 %
Footprint in m ²	0.6	0.6	0.6
Weight in kg	92 103	117 128	164 175
Number of shelves provided as standard	2 (1 standard + 1 HTS)	3 (2 standard + 1 HTS)	4 (3 standard + 1 HTS)
Temperature fluctuation at +37 °C	± 0.1 K	± 0.1 K	± 0.1 K
Temperature uniformity at +37 °C	± 0.2 K	± 0.2 K	± 0.2 K
Temperature uniformity at +25 °C	± 0.1 K	± 0.1 K	± 0.1 K
Recovery time after door has been opened for 30 s at +37 °C	≤ 3 min	≤ 4.5 min	≤ 5.5 min
Energy consumption at +37 °C	0.038 kWh/h	0.046 kWh/h	0.056 kWh/h
Noise level	≤ 41 dB (A) ≤ 44 dB (A)	≤ 41 dB (A) ≤ 44 dB (A)	≤ 41 dB (A) ≤ 44 dB (A)
Power supply	220 – 240 V 1 ~ / 50 – 60 Hz	220 – 240 V 1 ~ / 50 – 60 Hz	220 – 240 V 1 ~ / 50 – 60 Hz
Cat. No.	62000 62005	64000 64005	66000 66005
Non-IVD version	62001 62006	64001 64006	66001 66006
Other voltages			
100-120 V 1 ~ / 50 – 60 Hz	62000-01 62005-01	64000-01 64005-01	66000-01 66005-01

MORE OPTIONS AND ACCESSORIES



Switchboard



Rack for petri dishes



Rack for Loewenstein application

	Cat. No.
Shelf (Set) Made of stainless steel, with standard rails, max. load (kg): 50	60001
Shelf (HTS-Set) Made of stainless steel, with telescopic rails, extendable up to 70 %, max. load (kg): 40	60031
Drawer (HTS-Set), High 30 mm Made of stainless steel, with telescopic rails, extendable up to 70 %, tightly welded, max. load (kg): 40	60024
Drawer (HTS-Set), High 65 mm Made of stainless steel, with telescopic rails, extendable up to 70 %, tightly welded, max. load (kg): 40	60025
Drawer (HTS-Set), High 105 mm Made of stainless steel, with telescopic rails, extendable up to 70 %, tightly welded, max. load (kg): 40	60026
Rack (HTS-Set) For Petri dishes, stainless steel, with telescopic rails, extendable up to 70 %, Petri dishes Ø (mm): 90, max. load (pcs): 90	60038
Rack (Set) For Petri dishes, stainless steel, with standard rails, Petri dishes Ø (mm): 90, max. load (pcs): 90	60039
Rack For Petri dishes, stainless steel, Petri dishes Ø (mm): 90, max. load (pcs): 90	60040
Rack (HTS-Set) For inclined storage of cultures (Loewenstein), stainless steel, with telescopic rails, extendable up to 70 %, inclination angle: 5°, tube Ø (mm): 15-20, max. load (pcs): 81tube	60036
Rack (Set) For inclined storage of cultures (Loewenstein), stainless steel, with standard rails, inclination angle: 5°, tube Ø (mm): 15-20, max. load (pcs): 81 tubes	60037
Rack For inclined storage of cultures (Loewenstein), stainless steel, inclination angle: 5°, tube Ø (mm): 15-20, max. load (pcs): 81 tubes	60041
Frame L, 16-place Made of stainless steel, for inclined storage of cultures, tube Ø (mm): 15-20, Tube length (mm): 100-125, inclination angle 5° or 20 °	60027
Frame XL, 16-place Made of stainless steel, for inclined storage of cultures, tube Ø (mm): 15-20, Tube length (mm): 126-170, inclination angle 5° or 20 °	60028
Switchboard 4-fold socket strip, as a unit controllable via display, on the back of the device	60521
Independent PT 100 sensor For independent temperature measurement, four-wire system, temperature values output with analogue output 4-20 mA on the back of the device	60503
Passive dehumidification For individual or timed opening of a dehumidification module via the touchscreen	60042
Service: Assembly of the Stacking kit for the HettCube 200 200 R	60043
Service: Changing the door hinge	60044
Glass door All-glass outer door, for HettCube 200 200 R	60030
Glass door All-glass outer door, for HettCube 400 400 R	60029
Glass door All-glass outer door, for HettCube 600 600 R	60013
Access port Ø (mm): 22, Foam stoppers	60006
Access port Ø (mm): 42, Foam stoppers	60007
Access port Ø (mm): 67, Foam stoppers	60008
Stacking kit For safe stacking of two HettCubes 200 200 R	60009
Rolling cabinet Lockable, with one drawer, incl. lockable castors, WxDxH (mm): 770x800x550, for HettCube 200 200 R	60010
USB Port Lock (Set) For securing the USB-A interface. Set consisting of 10 securing clips and 1 USB key tool.	60525
Parameter for continuous cooling operation For storing samples below 15 °C for more than 2 weeks	60526

— EXTENSIVE STANDARD EQUIPMENT



4.3 inch touchscreen



Shelf (HTS-Set) with telescopic rails



Access port on rear panel
Ø 42 mm

4.3 inch touchscreen:

- Target / actual display
- Setting accuracy 0.1 ° C
- Real-time calendar
- Timer
- Language options (English, German, French and Spanish)
- Temperature diagram in 3 zoom levels (up to 4 weeks)
- Power failure scenarios
- Door alarm individually adjustable
- Log (door openings, alarms and operating hours)
- PIN lock
- Up to 99 program functions (Start/Stop, Period, Timer at start, Timer at temperature, ...)
- Temperature selection monitor class 3.1 for all models

Additionally with refrigerated devices

- Temperature reduction with holiday function
- Temperature selection monitor class 3.2 for all refrigerated models
- Programming external devices via switchboard (option)

Control panel and door lockable simultaneously

USB service interface

Bushing on rear panel Ø 42 mm

Potential-free alarm output

Interior of high-quality stainless steel (W-St 1.4301 (ASTM 304))

In addition you get for free ...

Up to 3 Shelf standard shelves of stainless steel (depending on model size)

HTS shelf of stainless steel with telescopic rails

Factory certificate (HettCert) – 9 points measurement analog to DIN 12880: 2007-05

Rebates available for unused shelves*

* Choose other shelves / drawers as standard, we credit you the price of unused standard inserts.

— EVERYTHING UNDER CONTROL



INTUITIVE OPERATION WITH THE NEW TOUCHSCREEN

Get clear and concise information on your incubation process – at a glance! With the new 4.3 inch touchscreen and intuitive menu dashboard, you can easily view the status of the device, as well as any alarms and events in the past 4 weeks. Any event or irregularity (such as door openings, tolerance band violations or power failures) are electronically documented in the logbook.




EASY WEEKLY PROGRAMMING

The user-friendly touchscreen allows for uncomplicated adjustment of weekly programming without additional software – directly on the device. The holiday function allows you to define additional temperature drops for your days off already months in advance. Easily determine the start time or the time period as well as the frequency of your Temperature reduction in a real-time calendar.



— SAFETY FOR YOUR SAMPLES



FLEXIBLE SETTINGS

Various events and alarm functions are individually adjustable. For example: Deviations from the interior temperature can be limited individually over tolerance range limits or fixed via independent temperature safety device of Classes 3.1 and 3.2. Class 3.2 is already included in the standard version of all refrigerated HettCubes.



PROCESS RELIABILITY EVEN IN THE EVENT OF A POWER FAILURE

With the new HettCube generation, you can keep control over your samples even in the event of a power failure. Define by yourself two different settings options how your HettCube's should behave in the event of a power failure.

Setting the period

By default, the device automatically restarts at the point where the power failed. But Users can also define the acceptable length of time in the event of a power failure. Once power is restored, the HettCube will verify whether this pre-set period has been exceeded. Should this be the case, the settings will be paused and the incubator will automatically move to a Standstill (Safe) Mode. Otherwise, the unit will continue with normal operation and user settings.

Setting the tolerance band

Tolerance band limits and holding temperature are individually configurable. After a power failure, the HettCube checks whether there is a tolerance band violation. The HettCube then automatically adjusts to the previous configured holding temperature. If there is no violation of the tolerance band the HettCube resumes its work.



PERFECT CONDITIONS

HettCube incubators combine the advantages of natural and forced convection to provide a stable and uniform environment for cultures. The fan is housed outside of usable space, providing higher throughputs and limiting airflow inside the incubator. Temperature is primarily maintained by radiated heat to ensure even temperature distribution and to prevent hot spots. This yields optimum growth conditions and considerably reduces the potential of samples drying out.

— MAXIMUM USABLE SPACE – SMALLEST FOOTPRINT


30 % MORE VALIDATED USABLE SPACE

Due to their gentle air flow and edge-to-edge temperature uniformity, HettCube incubators provide up to 30 % more validated usable space* than a traditional incubator with the same internal volume.

*in accordance with DIN 12880:2007-05

■ 520 liters of interior space

■ 351 liters of validated usable space*

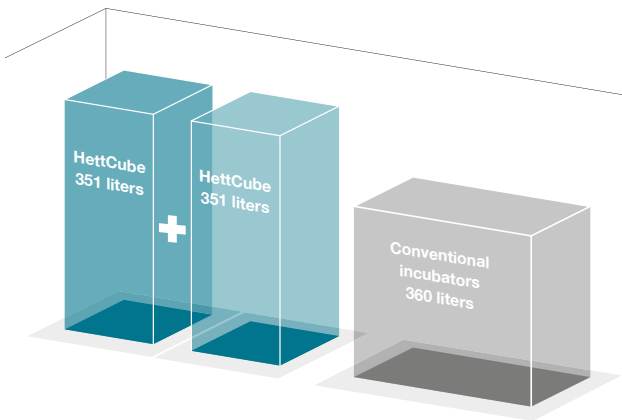

50 % SMALLER FOOTPRINT

The HettCube's upright design requires up to 50 % less floor space than a traditional incubator with similar capacity. The space saving footprint allows you to nearly double your capacity by accommodating two HettCube incubators within the same footprint as one conventional incubator.

■ HettCube

702 liters of validated usable space with the same footprint

■ Conventional incubators

360 liters of validated usable space

HettCube	Conventional incubators
Gentle air flow + High-performance insulation + Small footprint =	Strong air flow + Bulky insulation + Large footprint =
Maximum loading capacity + Cost savings per m ² laboratory space	Low loading capacity + Higher costs per m ² laboratory space


HEAT COMPENSATION

RELIABLE COMPENSATION OF TEMPERATURE DIFFERENCES BETWEEN THE INSIDE AND OUTSIDE

HettCube models react to changes in ambient conditions. Temperature fluctuations outside the incubator and energy introduced into the usable space by external equipment are compensated for immediately and actively.

Heat compensation of the HettCube 200 R / 400 R / 600 R

Lowest attainable temperature values upon introduction of equipment with different heat outputs.

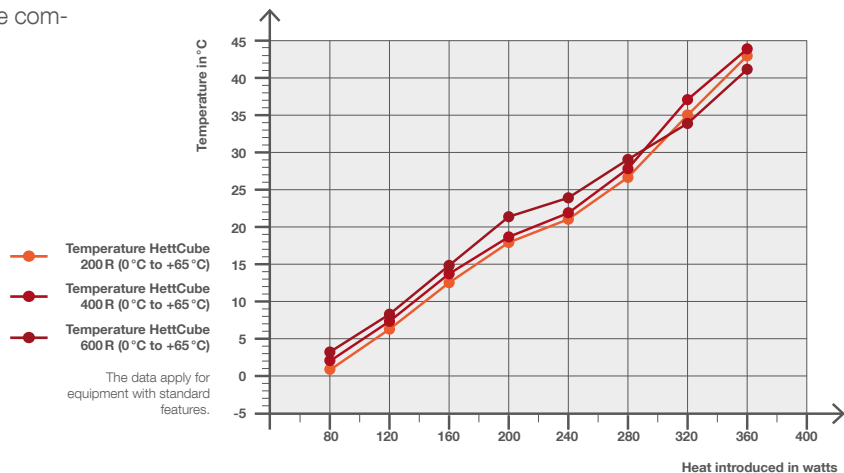


HETTCUBES WITH GLASS DOOR

The optional glass door enables users to check on their cultures without opening the door.



Condensation diagram for HettCubes size 200 R/400 R/600 R with glass door at an ambient temperature of +22°C

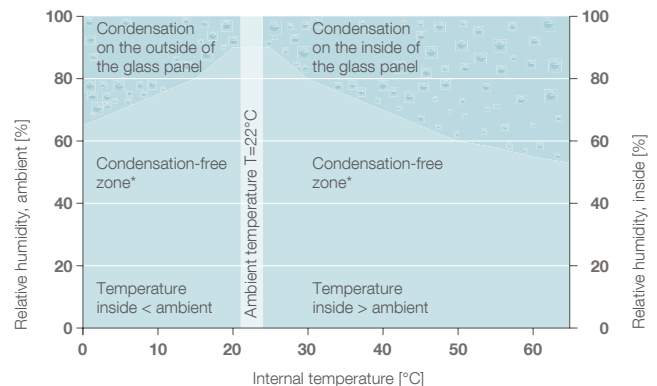

— LOW ENVIRONMENTAL IMPACT



Minimal operating costs

Our HettCubes heat or cool only when needed. At an operating temperature of 37 °C a HettCube incubator consumes less than 0.056 kWh/h. This brings average savings of up to 450 Euro annually*. Therefore, investment costs are recouped within shorter time. The use of a HettCube incubator saves on average up to 940 kg of CO₂ emissions annually*.

Additionally: The insulation of the HettCubes consists of water-driven foam, which contains no fluorinated hydrocarbons. Their GWP value (Global Warming Potential) is a thousand times lower than that of conventional insulating foams.

*Assuming 24h operation 365 days a year. The basis for calculation is € 0.29 per kWh/h – the average price of electricity in Germany in 2018 and 0.6 kg CO₂ per kWh/h.

First-class isolation

The advanced control system and insulation mean that the incubator will maintain a set temperature even if there is only a difference of 1 K (°C) from the ambient temperature. This allows an uncooled HettCube incubator to be used in situations in which a comparable incubator would require cooling.

— PROVEN QUALITY



Certifications

Hettich products comply with all applicable safety regulations, carry the TÜV seal and are compliant with IVD. Hettich manufactures according to the applicable quality and environmental management systems, including ISO 9001, ISO 13485 and ISO 14001.

Each HettCube is temperature validated before delivery by means of the 9 point measurement and receives a HettCert factory certificate, included free of charge. All temperature data are determined according to DIN 12880: 2007-5.

PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



ENVIRONMENTAL PRODUCTS

Testing for Food, Agro, Pharma & Life Science

Are you looking for climate control equipment? We are specialized in the design, manufacture, installation and maintenance of such equipment. Hettich delivers standard equipment which can be adapted to your application. The product range includes all forms of simulation with the ability to control such variables as temperature, humidity and light.

For further information, please visit the website www.hettichbenelux.com or give us a call.



PLANT GROWTH CABINETS



STABILITY CABINETS

CONTROL PANELS

The control panels from Hettich are easy to operate and specifically tailored to users' needs. Entry of the parameters is fast, precise and convenient by way of an adjuster knob and / or selector keys on a foil keypad. The intuitive display shows the actual values in digital format while the centrifuge is running.

E CONTROL PANEL



EBA 270



ROTOFIX 32 A

The E(conomy) control panel is fitted in the EBA 270 and ROTOFIX 32 A models. The required centrifugation parameters can be entered quickly and easily on the user-friendly keypad:


DISPLAY

RPM	Speed indication. Entry in increments of 100.
t	Time indication. Entry in minutes. max. 99 min.

KEYPAD

▲	Increases the relevant value.
▼	Decreases the relevant value.
PULSE	For short centrifugation steps.
OPEN	Opens the lid (EBA 270).
START	Starts centrifugation.
STOP	Stops centrifugation manually
RCF	Switches from RPM to RCF display (ROTOFIX 32 A).

E PLUS CONTROL PANEL

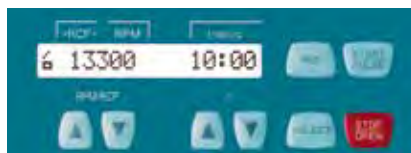

The models EBA 200, EBA 200 S, HAEMATOKRIT 200 and MIKRO 185 are operated with the E Plus control panel. In contrast to the E control panel this allows entry of the speed (RPM) or the relative centrifugal force (RCF).


DISPLAY

RCF	Relative centrifugal force.
RPM	Speed indication. Entry in increments of 10.
t/min:s	Centrifugation time (max. 99 min : 59 sec).

KEYPAD

▲	Increases the relevant value.
▼	Decreases the relevant value.
RCF	Switches from RPM to RCF display. Entry of the RCF in increments of 1. Input of rotor radius in mm in RCF mode.
SELECT	Guides the user through the menu options.
START	Starts centrifugation.
PULSE	For short centrifugation steps.
STOP	Stops centrifugation manually.
OPEN	Opens the lid at standstill.

M CONTROL PANEL

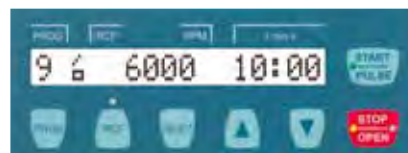

Centrifuge models EBA 280 and EBA 280 S are equipped with the M control panel. The parameters are selected with the Select key and the desired values are set using arrow keys and stored by pressing the Start/Pulse key.

DISPLAY

PROG	Program number. Ten programmable memories are available.
>RCF<	Relative centrifugal force.
RPM	Speed indication. Entry in increments of 10.
t/min:s	Centrifugation time (max. 99 min : 59 sec).

KEYPAD

PROG	Selects the program menu to call up or store programs.
RCF	Switches from RPM to RCF display. Entry of the RCF in increments of 1. Entry of the centrifuging radius in mm.
SELECT	Guides the user through the menu options.
▲	Increases the relevant value.
▼	Decreases the relevant value.
START	Starts centrifugation.
PULSE	For short centrifugation steps.
STOP	Stops centrifugation manually.
OPEN	Opens the lid at standstill.

A LED IN THE KEYBOARD LIGHTS UP:

- when the RCF display is activated (RCF key)
- during centrifugation (Start/Pulse key)
- during the braking period (Start/Open key – LED at the right)
- if the lid can be opened (Start/Open key – LED at the left)

N PLUS CONTROL PANEL



The MIKRO 200 / 200 R. MIKRO 220 / 220 R. UNIVERSAL 320 / 320 R and ROTOFIX 46 / 46 H models are quick and easy to operate using this variant of the N control panel. The parameters are selected with the Select key. An adjuster knob is used to set the values. and the settings are stored by pressing the Start/Impulse key.

DISPLAY

P	Program number. Four (MIKRO 200 / 200 R) or 10 (MIKRO 220 / 220 R. UNIVERSAL 320 / 320 R. ROTOFIX 46 / 46 H) programmable memories are available.
T/°C	Temperature of refrigerated and heatable centrifuges. The temperature of the refrigerated models is infinitely variable between -20 °C and +40 °C (MIKRO 220 R. UNIVERSAL 320 R) or between -10 °C and +40 °C (MIKRO 200 R). Model ROTOFIX 46 H can be heated up to +90 °C.
>RCF<	Relative centrifugal force.
RPM	Speed indication. Entry in increments of 10.
t/min	Centrifugation time (max. 99 min : 59 sec).
—/—	Entry of the acceleration ramp 1 – 9
—/—	Entry of the braking ramp 1 – 9

KEYPAD

❄	Pre-cools the rotor chamber (MIKRO 200 R. MIKRO 220 R and UNIVERSAL 320 R) to the required temperature.
☀	Heats the rotor chamber of the ROTOFIX 46 H to the required temperature.
RCF	Switches from RPM to RCF display. Entry of the RCF in increments of 10. Input of rotor radius in mm in RCF mode.
SELECT	Guides the user through the menu options.
START	Starts centrifugation.
PULSE	For short centrifugation steps.
STOP	Stops centrifugation manually.
OPEN	Opens the lid at standstill.

C CONTROL PANEL



The advanced C control panel significantly facilitates the daily laboratory routine. Parameter selection is done via the use of symbol keys. Values are set with the control knob. and recorded by pressing the Start key. The temperature in the refrigerated ROTINA 380 R. ROTINA 420 R, ROTANTA 460 R and ROTANTA 460 Robotic centrifuges can be set in either Celsius (°C) or Fahrenheit (°F) degrees.

DISPLAY

PROG	Entry and recall of the program number. 98 programs can be stored.
T/°C	Entry of the temperature from -20 °C to +40 °C or -4 °F to +104 °F in increments of 1 with refrigerated models.
—/—	Entry of the run-up time in ramps 1 – 9 or in min : sec. Entry of the run-down time in ramps R 1 – 9 and B 1 – 9 or in min : sec. Also unbraked run-down or a brake force cut-off speed can be selected.
RCF	Entry of the relative centrifugal force in increments of 1. Entry of the centrifuging radius (RAD) in mm.
RPM	Entry of the speed in increments of 10.
TIME	Entry of the centrifugation time (max. 99 h : 59 min : 59 sec) or continuous operation.

KEYPAD

START	Starts centrifugation.
START	Starts short centrifugation.
START	Stores entries and changes.
❄	Starts pre-cooling program PREC.
STOP	Stops centrifugation manually.
OPEN	Opens the lid at standstill.

Centrifuges with C control panel permit the centrifugation time to be switched from „at start“ (commencing upon start) to „at speed“ (start when the set speed has been reached).

OPTIONS

PROGRAM INTERLOCKING: to combine several centrifugation runs.

S CONTROL PANEL



This special-class control panel is standard with the ROTIXA 500 RS and ROTO SILENTA 630 RS floorstanding centrifuges.

DISPLAY

PROG-Nr	Program number. 89 programmable memories are available.
T/°C	Temperature.
PROFIL	Run-up and run-down profile.
n/min-1	Speed indication.
t/min:sec	Centrifugation time (max. 999 min : 59 sec).

KEYPAD

STO	Stores the program.
RCL	Calls up the selected program.
PROG	Selects the program menu.
□	Entry of the temperature from -20 °C to +40 °C in increments of 1 °C. Entry of the rotor radius in mm in RCF mode
RCF	Switches from RPM to RCF display. Entry of the RCF in increments of 1.
—/—	Entry of the run-up time in ramps 1 – 9 or in min : sec.
—/—	Entry of the run-down time in ramps R 1 – 9 and B 1 – 9 or in min : sec. Also unbraked run-down or a brake force cut-off speed can be selected.
∫ RCF	The integral over the RCF indicates the overall RCF acting on the centrifuged material during the running time so far.
n	Entry of the speed in increments of 10.
t	Entry of the centrifugation time (max. 999 min : 59 sec) or continuous operation.
START	Starts centrifugation.
STOP	Stops centrifugation manually.

OPTIONS

PROGRAM INTERLOCKING: to combine several centrifugation runs.

DATA REPORT SYSTEM:

For detailed information on this subject, please refer to the HettInfo section on pages 152-153.

CENTRIFUGE CAPACITY GUIDE

Commonly-used tubes at a glance										
Volume in ml	0.2-2	8x0.2	0.5	15	50	100	250	1.6-7	4-10	15
WxDxH in mm										
Ø x L in mm	6-11 x 38	-	11 x 36	17 x 100	34 x 100	40 x 115	65 x 115	13 x 75/100	16 x 75/100	17 x 120
Centrifuge models	Maximum number of tubes per centrifuge									
MANUAL CENTRIFUGE	-	-	-	4	-	-	-	4	4	4
EBA 200 EBA 200 S	-	-	8	8	-	-	-	8	- / 8	4
EBA 270	-	-	6	6	-	-	-	6	6	-
EBA 280 EBA 280 S	-	-	12	12	6	-	-	12	8 / 12	6
MIKRO 185	24	-	12	-	-	-	-	-	-	-
MIKRO 200 200 R	30	-	15	-	-	-	-	-	-	-
MIKRO 220 220 R	48 (60)	-	15	12	6	-	-	12	12	6
ROTOFIX 32 A	(36)	-	24	32	6	4 (44 x 100 mm)	-	40/32	28/32	32
UNIVERSAL 320 320 R	30	24 x 8	15	32	6	4 (44 x 100 mm)	-	40/32	28/32	32
ROTINA 380 380 R	30	-	15	52	12	4 (44 x 100 mm)	4	64/76	52	36
ROTINA 420 420 R	30 (96)	-	15	72	16	12	4	104/84	72	52
ROTANTA 460 460 R	30 (224)	-	15	148	16	12	6	196	148	96
ROTOFIX 46	-	-	-	48	8	4	4	-	-	28
ROTANTA 460 RC 460 RF	30 (224)	-	15	148	16	12	6	196	148	96
ROTIXA 500 RS	(336)	-	-	168	24	16	6	200	168	112
ROTO SILENTA 630 RS	-	-	-	180	36	24	-	180	180	138
MIKRO 220 Robotic	 24 /  12	-	-	-	-	-	-	-	-	-
ROTINA 380 380 RI 380 RC Robotic				on request				48	48	on request
ROTANTA 460 Robotic				on request				80	80	on request
ROTOLAVIT II	-	-	-	24 x 5 ml	-	-	-	-	-	-

											Maximum performance of the centrifuges	
50	250/500	250/290	650/750	1,000	2,000	MTP	500	-	-	-		
29 x 115/115	60 x 162/96 x 147	61 x 122/62 x 137	97 x 139/152	96 x 176	150 x 100 x 180	128 x 15 x 86	4-place	-	-	-		
Maximum number of tubes per centrifuge											max. RCF	max. RPM min ⁻¹
-	-	-	-	-	-	-	-	-	-	-	1,298	3,000
-	-	-	-	-	-	-	-	-	-	-	3,461 6,153	6,000 8,000
-	-	-	-	-	-	-	-	-	-	-	2,254	4,000
3 / -	-	-	-	-	-	-	-	-	-	-	4,146 5,071	6,000
-	-	-	-	-	-	-	-	-	-	-	18,845	14,000
-	-	-	-	-	-	-	-	-	-	-	21,382	15,000
3 / -	-	-	-	-	-	-	-	-	-	-	31,514	18,000
8	-	-	-	-	-	-	-	6	12	-	4,226	6,000
8	-	4 x 200 ml	-	-	-	10	-	6	12	-	24,900	16,000
16	-	4	-	-	-	12	-	8	-	-	24,400	15,000
20	-	4	4 x 600 ml	-	-	16	-	8	-	-	24,400	15,000
40/28	4	8	4	-	-	24	4 x 450 ml	16	-	-	24,400	15,000
8	-	4	-	-	-	-	-	-	-	-	3,095	4,000
40/28	4	8	4	-	-	24	4 x 450 ml	16	-	-	24,400	15,000
40	4	6	4	4	-	24	4	12	-	-	18,038	11,500
48/36	6	6	6	6	6	-	12	-	-	-	6,520	6,000
-	-	-	-	-	-	-	-	-	-	-	18,516	13,000
16	on request					6	on request				4,696	5,100
24	on request					12	on request				6,446	6,200
-	-	-	-	-	-	-	-	-	-	-	1,438	3,500

FEATURES OF THE CENTRIFUGES

	metal housing	plastic housing	metal lid	viewing port in the lid	lid locking and holding	one-hand lid lock	twist lock	powered lid-locking	lid dropping protection	emergency lid lock release	stainless steel chamber	light alloy chamber
EBA 200 I 200 S		•	•	•	•	•			•	•		•
EBA 270		•	•	•	•	•			•	•	•	
EBA 280 I 280 S		•	•	•	•	•			•	•	•	
HAEMATOKRIT 200		•	•	•	•	•			•	•		•
MIKRO 185		•	•	•	•	•			•	•		•
MIKRO 200	•		•	•	•	•		•	•	•	•	
MIKRO 200 R	•		•	•	•	•		•	•	•	•	
MIKRO 220	•		•	•	•	•		•	•	•	•	
MIKRO 220 R	•		•	•	•	•		•	•	•	•	
ROTOFIX 32A	•		•	•	•	•			•	•	•	
UNIVERSAL 320	•		•	•	•	•		•	•	•	•	
UNIVERSAL 320 R	•		•	•	•	•		•	•	•	•	
ROTINA 380	•		•	•	•	•		•	•	•	•	
ROTINA 380 R	•		•	•	•	•		•	•	•	•	
ROTINA 420	•		•	•	•	•		•	•	•	•	
ROTINA 420 R	•		•	•	•	•		•	•	•	•	
ROTANTA 460 I 460 R	•		•	•	•	•		•	•	•	•	
ROTOFIX 46	•		•	•	•		•		•	•	•	
ROTOFIX 46 H	•		•	•	•		•		•	•	•	
ROTANTA 460 RC I 460 RF	•		•	•	•	•		•	•	•	•	
ROTIXA 500 RS	•		•	•	•	•		•	•	•	•	
ROTO SILENTA 630 RS	•		•	•	•	•		•	•	•	•	
ROTO LAVIT II	•		•	•	•	•			•	•		
Robotic centrifuges	Details on our models MIKRO 220 Robotic, ROTINA 380, 380 R, 380 RC Robotic and ROTANTA 460 Robotic											

#) Adjustable temperature range MIKRO 200 R: -10 °C to +40 °C.

	air cooling	cooling (20 °C to +40 °C)	heating (to +90 °C)	automatic rotor recognition	rapid rotor change system	brushless drive	control panel	error display	imbalance switch-off	data report system (option)	also available in 115 V / 60 Hz	
	•					•	E plus	•	•		•	EBA 200 200 S
	•					•	E	•	•		•	EBA 270
	•			•	•	•	M	•	•		•	EBA 280 280 S
	•					•	E plus	•	•		•	HAEMATOKRIT 200
	•					•	E plus	•	•		•	MIKRO 185
	•					•	N plus	•	•		•	MIKRO 200
		• #)				•	N plus	•	•		•	MIKRO 200 R
	•			•		•	N plus	•	•		•	MIKRO 220
		•		•		•	N plus	•	•		•	MIKRO 220 R
	•			•		•	E	•	•		•	ROTOFIX 32 A
	•			•		•	N plus	•	•		•	UNIVERSAL 320
		•		•		•	N plus	•	•		•	UNIVERSAL 320 R
	•			•		•	C	•	•		•	ROTINA 380
		•		•		•	C	•	•		•	ROTINA 380 R
	•			•		•	C	•	•		•	ROTINA 420
		•		•		•	C	•	•		•	ROTINA 420 R
• 460	• 460 R			•		•	C	•	•		•	ROTANTA 460 460 R
•				•		•	N plus	•	•		•	ROTOFIX 46
			•	•		•	N plus	•	•		•	ROTOFIX 46 H
	•			•		•	C	•	•		•	ROTANTA 460 RC 460 RF
	•			•		•	S	•	•	•		ROTIXA 500 RS
	•			•		•	S	•	•	•		ROTO SILENTA 630 RS
•						•	Touch	•	•		•	ROTOLAVIT II
are available on our website www.hettichlab.com												Robotic centrifuges

MODEL VARIANTS FOR SPECIAL REQUIREMENTS

The following variants of the refrigerated models UNIVERSAL 320 R, ROTINA 380 R, ROTINA 420 R, ROTANTA 460 R/RC/RF, ROTIXA 500 RS and ROTO SILENTA 630 RS are available:

Variants with connection for nitrogen (N₂) flushing:
For centrifugation of reactive substances or substances which are unstable in aerial oxygen. If required, customers should install an oxygen concentration monitor.

Heating/cooling variants (H/C):
For applications demanding temperatures above 40 °C, such as mineral oil testing according to ASTM, material endurance tests, etc.

The heating/cooling variants of the UNIVERSAL 320 R feature no cooling unit and no built-in heater. An external refrigerated/heating circulator must be provided by the customer. Depending on the circulator performance, the centrifuge is able to heat/refrigerate in a range from 0 °C to +90 °C.

The floorstanding ROTO SILENTA 630 RS and ROTIXA 500 RS centrifuges are also available as variants with internal cooling unit or for connection to external cooling units, and as GMP versions.

	Variant	Power supply*	Frequency	Cat. No.
UNIVERSAL 320 R	N ₂ flushing	200–240 V	50 Hz	1406-20
		240 V	60 Hz	
UNIVERSAL 320 R	N ₂ flushing	115–127 V	60 Hz	1406-21
UNIVERSAL 320 R**	H/C to +90 °C	200–240 V	50–60 Hz	1406-50
UNIVERSAL 320 R**	H/C to +90 °C	100–127 V	50–60 Hz	1406-51
UNIVERSAL 320 R**	H/C to +90 °C plus N ₂ flushing	200–240 V	50–60 Hz	1406-70
UNIVERSAL 320 R**	H/C to +90 °C plus N ₂ flushing	100–127 V	50–60 Hz	1406-71
ROTINA 380 R	H/C to +90 °C	200–240 V	50–60 Hz	1706-50
ROTINA 420 R	N ₂ flushing	200–240 V	50 Hz	4706-20
ROTINA 420 R	H/C to +90 °C	200–240 V	50 Hz	4706-50
ROTANTA 460 R	N ₂ flushing	200–240 V	50 Hz	5660-20
ROTANTA 460 R	H/C to +90 °C	200–240 V	50 Hz	5660-50
		100–127 V	60 Hz	
ROTANTA 460 R	H/C to +90 °C	100 V	50 Hz	5660-51
		200–240 V	50 Hz	
ROTANTA 460 R	H/C to +90 °C plus N ₂ flushing	200–240 V	50 Hz	5660-70
ROTANTA 460 RC	H/C to +90 °C	200–240 V	50 Hz	5670-50
ROTANTA 460 RF	H/C to +90 °C	200–240 V	50 Hz	5675-50
ROTIXA 500 RS	H/C to +60 °C	230–240 V	50 Hz	4950-50
ROTIXA 500 RS	GMP, internal cooling unit with water-cooled condenser	220–240 V	50–60 Hz	4950-80
ROTO SILENTA 630 RS	H/C to +90 °C	400 V 3~ +N	50–60 Hz	5005-50
ROTO SILENTA 630 RS	GMP, internal cooling unit with water-cooled condenser	400 V 3~ +N	50–60 Hz	5005-80
ROTO SILENTA 630 RS	GMP, external cooling unit	400 V 3~ +N	50–60 Hz	5005-90

*) Other voltages on request.

**) An external refrigerated / heating circulator must be provided by the customer.

AVAILABLE TUBES

	Capacity in ml	Dimensions Ø x L in mm	Description	Cat. No.
	200	56 x 112	bottle, PP, with screw cap	0555
	250	61 x 122		5127
	600	93 x 134		0551
	650	97 x 139		0554
	750	97 x 152		0512
	1.000	96 x 176		4239
	450	97 x 110	bucket, PP	4447
	750	96 x 135		4234-A
	1,000	98 x 138	bucket, stainless steel, with screw cap	4255
	2,000	150 x 100 x 180 WxDxH	bottle, PP, with screw cap	0550
	30	24 x 151	chrome bath tube with stopper	0508
				0529
	30	44 x 105	chrome bath tube	0534
		-	rubber stopper for 0534	0535
	25	24 x 146.5	Schlenk tube	0532
	50	38 x 148.5		0533
	100	37 x 200	ASTM tube (petroleum tester), glass, calibrated	0531 conical
	100	58 x 161		0528 pear-shaped

	Capacity in ml	Area in mm² / (L x W) in mm	Description	Cat. No.
	0.5	28.3	cyto chambers, disposable	1531 (50 pcs.)
	0.2	28.3		1532 (50 pcs.)
	0.5	28.3	cyto chambers (re-usable)	1538 (12 pcs.)
	6	13.4 x 22		1532 (12 pcs.)
	1	30	cyto chambers, single (re-useable)	1663
	2	60		1664
	4	120		1665
	8	240		1666
	3 x 2	3 x 60	cyto chambers, multiple (re-useable)	1667
	4 x 1	4 x 30		1668
	1	30	cyto chambers	1671
	2	60		1672
	4	120		1673

Please make sure not to exceed the tubes' max. permissible RCF.

The capacity of the vessels is given as the nominal volume according to the manufacturer.

The filling volume can be different.

The chrome bath tubes 0508, 0529 and 0534 may not be centrifuged with the stopper. The stopper only serves to close the tube for agitating or mixing.

CERTIFICATES / REGISTRATIONS

Hettich centrifuges and incubators fulfill all applicable European directives that apply to you. Every work step is subject to strict controls and documentation. The company is ISO 9001, ISO 13485 and ISO 14001 certified. Hettich products are manufactured with care and responsibility, giving them a worldwide reputation for safety and reliability.

PRODUCT REGISTRATIONS



IVD-conform

Medical Device In-Vitro Diagnostic (IVD) according to EU Directive 98/79/EC



Medical device

Medical device according to EU Directive 93/42/EEC



General laboratory equipment


General laboratory equipment according to Directive 2014/35/EU for electrical equipment

EBA 200 200 S	•		
EBA 270	•		
EBA 280 280 S	•		
HAEMATOKRIT 200	•		
MIKRO 185	•		
MIKRO 200 200 R	•		
MIKRO 220 220 R	•		
ROTOFIX 32A	•		
UNIVERSAL 320 320 R	•		
ROTINA 380 380 R	•		
ROTINA 420 420 R	•		
ROTANTA 460 460 R		•	
ROTOFIX 46 46 H			•
ROTANTA 460 RC 460 RF		•	
ROTIXA 500 RS		•	
ROTO SILENTA 630 RS		•	
ROTOLAVIT II	•		
HETTCUBE 200 200 R	•		•
HETTCUBE 400 400 R	•		•
HETTCUBE 600 600 R	•		•

CATALOG EXPLANATION

Layout

1. Navigation:
Header + sheet index
2. Rotor
 - + Bucket
 - + Lid
 - + Adapter
 - + Vessel
 - + Thumbnail
3. All specifications apply to the possible combinations shown
4. A maximum of two rotors is shown per page

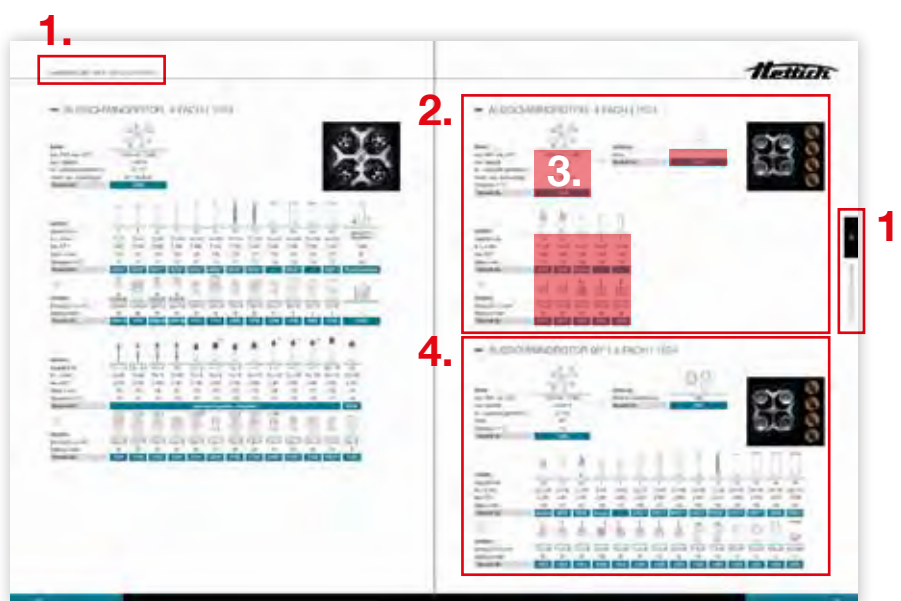

Shortcuts

Vessels:

CP	= Culture Plate
DWP	= Deep Well Platte
MS	= Micronic System
MTP	= Microtitre Plate
QP	= Filter Plate
PA	= Polyamide
PC	= Polycarbonate
PE	= Polyethylene
PP	= Polypropylene

Device name:

C	= C after the model name stands for underbench centrifuge
F	= F after the model name stands for floorstanding centrifuge
H	= H after the model name stands for heated centrifuge
R	= R after the model name stands for refrigerated centrifuge
S	= S after the model name stands for S control panel in the centrifuge. (Except EBA 200 S, EBA 280 S).



Angle rotor | Angle rotors are ideally suited for use at high speeds. Time can be saved by tilting the tubes and accelerating the separation.

Calculation of centrifugal force | $RCF = (n/1000)^2 \times r \times 1,118$ | n = Rotation in min⁻¹ (RPM) | r = Radius in mm

Capacity of the centrifuge | An overview of all capacities can be found [on page 200](#).

Control panel | Find an overview of all control panels [on page 198](#).



Disk Rotor | This type of angle rotor was specially developed for the centrifugation of capillaries. Significant results are generated in the 90° angle and can be displayed directly in the rotor. With the help of an evaluation cover the results can be read easily and safely.

Download Center | The Download Center on our website allows you to access the most up to date documents including catalogs, brochures, data sheets and certificates. Please visit: www.hettichlab.com/downloadcenter



Drum rotor | A extended form of the angle rotor is the drum rotor. With high rotational speed and high capacity, it is the ideal choice to create sediment at the bottom of the vessel.

Environment | As an ISO 14001 certified company, sustainability and the protection of the environment are a foundation of our principles. Find out more on our website: www.hettichlab.com

Footnotes | All footnotes in the catalog can be found on the last page. The fold-out page allows you to always see the appropriate footnote.

Hettich Packages | No more searching for the right combination of accessories. Our packages include centrifuge, rotor, buckets and adapters – suitable for your specific application.

Model variants | Many of our devices have two different model variants, e.g. cooled and uncooled. In order to be able to distinguish between these two, we use a vertical hyphen (Model x | Model y)
For special requirements you can find further versions of our centrifuges [on page 204](#).

Product overview | Find a quick product overview [on page 6-7](#).

RCF | The relative centrifugal force RCF (or often called g-value) is a characteristic value for centrifugation.

Registrations | Find a detailed overview of all registrations of our products [on page 206](#).

RPM | Is the measurement unit for the speed. It indicates the number of rotations of the rotor in a period of one minute.



Swing-out rotor | During centrifugation, the tubes are spin at a 90° horizontal angle. In the process, the sediment is deposited at the bottom of the tube, separations are formed horizontally. If higher capacities are required in the mid speed range, swing-out rotors are used. The wide variety of accessories is an additional feature of these rotors.

Symbol



Reaction tubes
up to 5 ml



Blood collection
tubes, urine tubes



Plates, filter plates



Special tubes



PCR strips



Tubes with
screw cap



Racks



Hematocrit capillaries



Tubes



Bottles



Blood bags



Cyto accessories

IMPRINT

Hettich 01.21 | We reserve the right to make technical changes to our products as well as printing errors and colour deviations in our printed matters we reserve ourselves.

Conception: dn.p Marketing + Werbeagentur GmbH, Wittingen | Photography: Jürgen Weisheitinger, Lörrach / Tom Pingel, Hamburg u. Stuttgart | Illustrations: Grafikbüro Christian Islinger, Regensburg | Printing: Typodruck GmbH & Co. KG, Rudolf-Diesel-Straße 9, 78532 Tuttlingen.

BENELUX

Hettich Benelux B. V.

De Aaldor 9
NL-4191 PC Geldermalsen
Phone +31 (0)88 2 21 99 00
Fax +31 (0)88 2 21 99 95
info@hettichbenelux.com
www.hettichbenelux.com

FRANCE

Hettich France SÀRL

7, Place de la Gare
F-57200 Sarreguemines
Phone +33 (0)4 72 49 01 62
Fax +33 (0)4 72 24 66 08
info-fr@hettichlab.com
www.hettichlab.com

SWITZERLAND

Hettich AG

Seestr. 204a
CH-8806 Bäch
Phone +41 (0)44 / 786 80 20
Fax +41 (0)44 / 786 80 21
info@hettich.ch
www.hettich.ch

SINGAPORE

Hettich

Asia Pacific Pte. Ltd.

3 Ang Mo Kio Street 62,
#01-47 LINK@AMK
Singapore 569139
Phone +65 6358 3833
Fax +65 6358 3558
info@hettichlab.com.sg
www.hettichlab.com.sg

USA

Hettich Instruments LP

100 Cummings Center, Ste 136L
Beverly, MA 01915
Phone +1 (0)978 / 2 32 39 57
Fax +1 (0)978 / 2 32 39 58
info@hettweb.com
www.hettweb.com

AS WELL AS SELECTED PARTNERS IN
OVER 70 COUNTRIES WORLDWIDE



YOUR HETTICH PARTNER

Andreas Hettich GmbH & Co. KG

Föhrenstr. 12
78532 Tuttlingen
Germany

info@hettichlab.com
Phone +49 7461 705 -0
Customer Service: -1401

www.hettichlab.com